

Report 9831C
March 1996

GENCORP
AEROJET

**Meteorological Satellites (METSAT) and
Earth Observing System (EOS)
Advanced Microwave Sounding Unit-A (AMSU-A)
Reliability Prediction Report**

**Contract No: NAS 5-32314
CDRL: 110**

Submitted to:

**National Aeronautics and Space Administration
Goddard Space Flight Center
Greenbelt, Maryland 20771**

Submitted by:

**Aerojet
1100 West Hollyvale Street
Azusa, California 91702**

Aerojet

**Report 9831C
March 1996**

**Meteorological Satellites (METSAT) and
Earth Observing System (EOS)
Advanced Microwave Sounding Unit-A (AMSU-A)
Reliability Prediction Report**

**Contract No: NAS 5-32314
CDRL: 110**

Submitted to:

**National Aeronautics and Space Administration
Goddard Space Flight Center
Greenbelt, Maryland 20771**

Submitted by:

**Aerojet
1100 West Hollyvale Street
Azusa, California 91702**

TABLE OF CONTENTS

Section		Page
1	INTRODUCTION	1
1.1	Summary	1
1.2	General	2
2	APPLICABLE DOCUMENTS	3
3	RELIABILITY ANALYSIS	4
3.1	Prediction procedure/ground rules	4
3.2	Excluded items	5
4	CONCLUSIONS	6
5	RELIABILITY BLOCK DIAGRAMS	7
6	IMPROVEMENTS	26
7	FUNCTIONAL DESCRIPTION OF METSAT/EOS AMSU-A INSTRUMENTS	27
7.1.	AMSU-A1 and AMSU-A2 Modules	27
7.1.1	Receiver Subsystem	27
7.1.1.1	Subsystem Description	27
7.1.1.2	Subsystem Interface Definition	29
7.1.2	Electronics Subsystem	29
7.1.2.1	Subsystem Description	29
7.1.2.2	Subsystem Interface Definition	34
7.1.3	Antenna Subsystem	35
7.1.3.1	Antenna Subsystem Description	35
7.1.3.2	Subsystem Interface Description	35
7.2	AMSU-A Functional Description	37
7.2.1	Antenna Functions	37
7.2.2	Receiver Functions	38
7.2.3	Data Processing - Multiplexing Functions	38
7.2.4	Temperature Monitoring	38
7.2.5	Central Processing Unit (CPU) and Control (Microcomputer)	39
7.2.6	Clock and Command	39
7.2.7	Test Points and Telemetry	40
7.2.8	Temperature Monitoring	40
7.2.9	Input Filter, DC/DC Converter, and Relay Control	40
7.3	Description of METSAT/EOS Unique Functions/Hardware	41
8	ABBREVIATIONS/ACRONYMS	43

TABLE OF CONTENTS

FIGURES

Figure	Page
1 Top View, AMSU-A Subsystems, Reliability Block Diagram.....	8
2 Top View, AMSU-A Module A1 and A2 Reliability Block Diagram.....	9
3 Module A1, Antenna Subsystem, METSAT/EOS Reliability Block Diagram.....	10
4 Module A1, Receiver Subsystem, METSAT/EOS Reliability Block Diagram.....	11
5 Module A1, Electronics Subsystem, EOS Reliability Block Diagram.....	16
6 Module A1, Electronics Subsystem, METSAT Reliability Block Diagram.....	18
7 Module A2, Antenna Subsystem, METSAT/EOS Reliability Block Diagram.....	20
8 Module A2, Receiver Subsystem, METSAT/EOS Reliability Block Diagram.....	21
9 Module A2, Electronics Subsystem, EOS Reliability Block Diagram.....	22
10 Module A2, Electronics Subsystem, METSAT Reliability Block Diagram.....	24
11 AMSU-A1 Receiver Functional Block Diagram	28
12 AMSU-A2 Receiver Functional Block Diagram	29
13 METSAT AMSU A1 Electronics Subassembly	30
14 EOS AMSU-A Electronics Subassembly	31
15 METSAT AMSU-2 Electronics Subassembly	32
16 EOS AMSU-A2 Electronics Subassembly	33
17 AMSU-A1 Antenna Functional Block Diagram	36
18 AMSU-A2 Antenna Functional Block Diagram	37
19 Power Interface Differences	41
20 Signal Interface Differences	42

APPENDIX

Appendix A	A-1
Sub Section A1	A-2
Sub Section A2	A-63

Section 1

INTRODUCTION

This report documents the reliability prediction performed on the Meteorological Satellites (METSAT) and the Earth Observing System (EOS) Advanced Microwave Sounding Unit-A AMSU-A instruments.

As described in Section 7, the instrument is partitioned into an Antenna Subsystem (AS), a Receiver Subsystem (RS) and an Electronics Subsystem (ES). The subsystems are partitioned into an A1 module and an A2 module. The Antenna and Receiver Subsystems are common for METSAT and EOS except for a compensation assembly in the Antenna Subsystem A2 Module (A2AS). Reliability block diagrams are provided for the METSAT Electronics Subsystem A1 Module (A1ES-METSAT), and the A2 Module (A2ES-METSAT), the EOS Electronics Subsystem A1 module (A1ES-EOS), and the A2 module (A2ES-EOS). A summary of this indexing is shown in Table I.

Table I Identification of AMSU-A Subsystems/Modules

AMSU Component	Index
METSAT/EOS Common	
A1 Module Antenna Subsystem	A1AS
A2 Module Antenna Subsystem	A2AS
A1 Module Receiver Subsystem	A1RS
A2 Module Receiver Subsystem	A2RS
METSAT Unique	
A1 Module Electronics Subsystem	A1ES-METSAT
A2 Module Electronics Subsystem	A2ES-METSAT
EOS Unique	
A1 Module Electronics Subsystem	A1ES-EOS
A2 Module Electronics Subsystem	A2ES-EOS

1.1 *Prediction Summary*

The predicted reliability, Mission Life and MTBF, of the METSAT and EOS AMSU-A instruments for a three year orbital life at an ambient temperature of +30°C are shown in Table II:

Table II Predicted Mission Life and MTBF

Instrument-Module	Specified (3 years)	Predicted (3 years)	MTBF (hours)
METSAT-A1	N/A	0.7715	101,359
METSAT-A2	N/A	0.9091	275,956
EOS-A1	0.70	0.7711	101,172
EOS-A2	0.84	0.9176	305,646

Mission Life Requirements, of GSFC S-480-13, Performance and Operational Specification for the Advanced Microwave Sounding Unit were used for the EOS "specified" requirements. No mission life requirements were specified for METSAT.

Several circuits are common to both assemblies; the common data are utilized in each prediction without change. (See Appendix A).

1.2 *General*

This report provides the following information:

- a. Results of reliability analyses.
- b. Conditions for failure rate calculations.
- c. Reliability math models.
- d. Reliability block diagrams.
- e. Functional descriptions of EOS and METSAT AMSU-A instruments.
- f. Subsystem functional block diagrams.

The MTBFs and Mission Life predictions were prepared from failure rates identified on the Reliability Block Diagrams provided in Section 5.

Appendix A presents the failure rate calculations for the METSAT/EOS components and parts that support the failure rates shown on the reliability block diagrams.

Section 2

APPLICABLE DOCUMENTS

This report was prepared in compliance with the relevant requirements and guidance contained in the following documents.

GSFC POS	Performance and Operation Specifications for the Earth Observing System/Advanced Microwave Sounding Unit (EOS/AMSU)
GSFC PAR	Performance Assurance Requirements for the Earth Observing System/Advanced Microwave Sounding Unit (EOS/AMSU)
MIL-STD-756	Military Standard, Reliability Modeling and Prediction
MIL-STD-785	Reliability Program for System Modeling and Prediction
MIL-HDBK-217F	Military Handbook, Reliability Prediction of Electronic Equipment
Notice 1	
NPRD-91	Non-Electronic Parts Reliability Data
MIL-STD-975	NASA Standard Electrical, Electronic, and Electromechanical (EEE) Parts List
AE-26607 Mar 1996	Subsystem Specification AMSU-A Antenna
AE-26608 Mar 1996	Subsystem Specification AMSU-A Receiver
AE-26609 Mar 1996	Subsystem Specification AMSU-A Electronics
1356009	Interconnect Diagram EOS/AMSU-A1
1356007	Interconnect Diagram EOS/AMSU-A2
1356940	Interconnect Diagram METSAT/AMSU-A1
1356945	Interconnect Diagram METSAT/AMSU-A2

Section 3

RELIABILITY ANALYSIS

The reliability prediction described herein was performed in accordance with Task 203 of MIL-STD-785. The failure rates used were derived primarily from MIL-HDBK-217. Other failure rate sources, such as NRPD-91, GIDEP, Vendor data, and Aerojet experience were also used.

Figures 1 and 2 summarize the reliability prediction data for the METSAT and EOS subsystems and A1 and A2 modules, respectively. These predictions were performed by analyzing each component listed in the reliability block diagrams. (See Tables in Appendix A (Section A1) for the A1 Module analysis and Tables in Appendix A (Section A2) for the A2 Module analysis.)

The data in Appendix A are predictions performed in accordance with MIL-HDBK-217 and other sources as applicable. (For example, predictions for vendor supplied parts and parts not listed in MIL-HDBK-217.)

3.1 *Prediction procedure/ground rules*

The prediction uses the guidelines of MIL-HDBK-217 and is based on the following ground rules:

- a. The equipment operates in a spacecraft environment.
- b. Component parts are properly derated.
- c. An ambient temperature of +30°C is selected as the operating temperature.
- d. Duty cycled failure rates are not utilized.
- e. Part failures will occur randomly and independently from each other.
- f. All component parts meet or exceed the reliability requirements specified.
- g. Reliability and redundancy are based upon a three-year life, i.e., at the time of launch the instrument is fully operational and is energized when the desired orbit is achieved.
- h. Redundancy utilized in this prediction is limited to the redundant PLO circuit, temperature monitor, and the 0.05 percent platinum resistor temperature (PRT) circuits with one allowable failure out of each seven PRT circuits.
 - i. Mission noncritical items (see 3.2) are not included.
 - j. The latest version parts lists and Aerojet drawings are used.
- k. Failure rates and reliability figures for various purchased items are vendor supplied. Where possible, subcontractor failure rates are used in this prediction. Otherwise, the specification reliability requirement was converted to a failure rate using three (3) years for time.

3.2 *Excluded items*

Components nonessential to mission requirements have not been included in this prediction. The objective of this report is to produce a reliability prediction for the mission essential components that are required to provide uncompromised data from all channels. The items excluded from this prediction include:

- a. Ground support equipment, including test connector and interface assembly.
- b. Analog telemetry circuits and output connector.
- c. Housekeeping circuits (temperature and voltage monitoring), including temperature sensor B boards and a portion of the PRT Multiplexer.
- d. Temperature transducers.

It is assumed that a failure of any of these items will not degrade mission essential system requirements.

Section 4

CONCLUSIONS

As shown in paragraph 1.1, the EOS AMSU-A instrument's predicted reliability exceeds the three year mission life requirements. No mission life requirement was specified for METSAT AMSU-A. However, the predicted reliability of the METSAT AMSU-A instrument also exceeds the specified EOS AMSU-A mission life requirements.

The predicted reliability in this report is considerably improved from the last revision. The previous "A" and "B" revisions were based on early design documentation. This "C" revision is based on released documentation and subcontractor CDRL submittals which more accurately depict the EOS and METSAT AMSU-A instruments.

Estimates of the software failure rates are based on the heritage of the K-L-M AMSU-A program. Similarly, the apportioned complexity of the A1 vs the A2 modules has been applied to software failure rate estimates using Aerojet Engineering experience.


Section 5

RELIABILITY BLOCK DIAGRAMS

The reliability block diagrams were prepared from design descriptions in the subsystem specifications for the Antenna Subsystem (AE-26607), Receiver Subsystem (AE-26608) and Electronics Subsystem (AE-26609), and from functional parts (CCA's and other hardware) shown in the interconnect diagrams for the EOS A1 Module (1356009), EOS A2 Module (1356007), METSAT A1 Module (1356940) and the METSAT A2 Module (1356945).


The Antenna Subsystem block diagrams are the same for both METSAT and EOS except for a compensation assembly in the METSAT A2 Module. The Receiver Subsystem block diagrams are the same for both METSAT and EOS. The Electronics Subsystem block diagrams are different for METSAT compared to EOS. The block diagrams for EOS and METSAT are provided in the following figures and are identified as described in Section 1, herein.

METSAT Top View Reliability Block Diagram

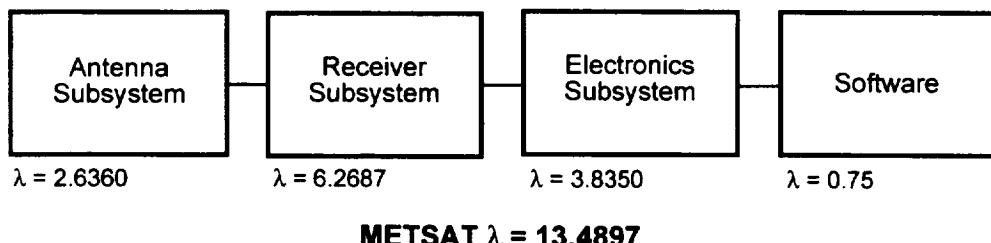

$$\text{METSAT } \lambda = 13.4897$$

EOS Top View Reliability Block Diagram

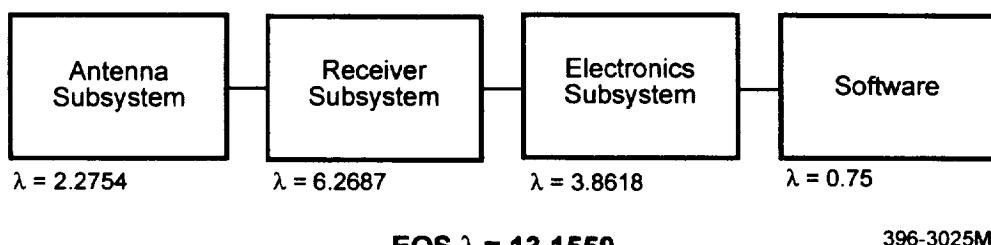

$$\text{EOS } \lambda = 13.1559$$

396-3025M

Figure 1 Top View, AMSU-A Subsystems, Reliability Block Diagram

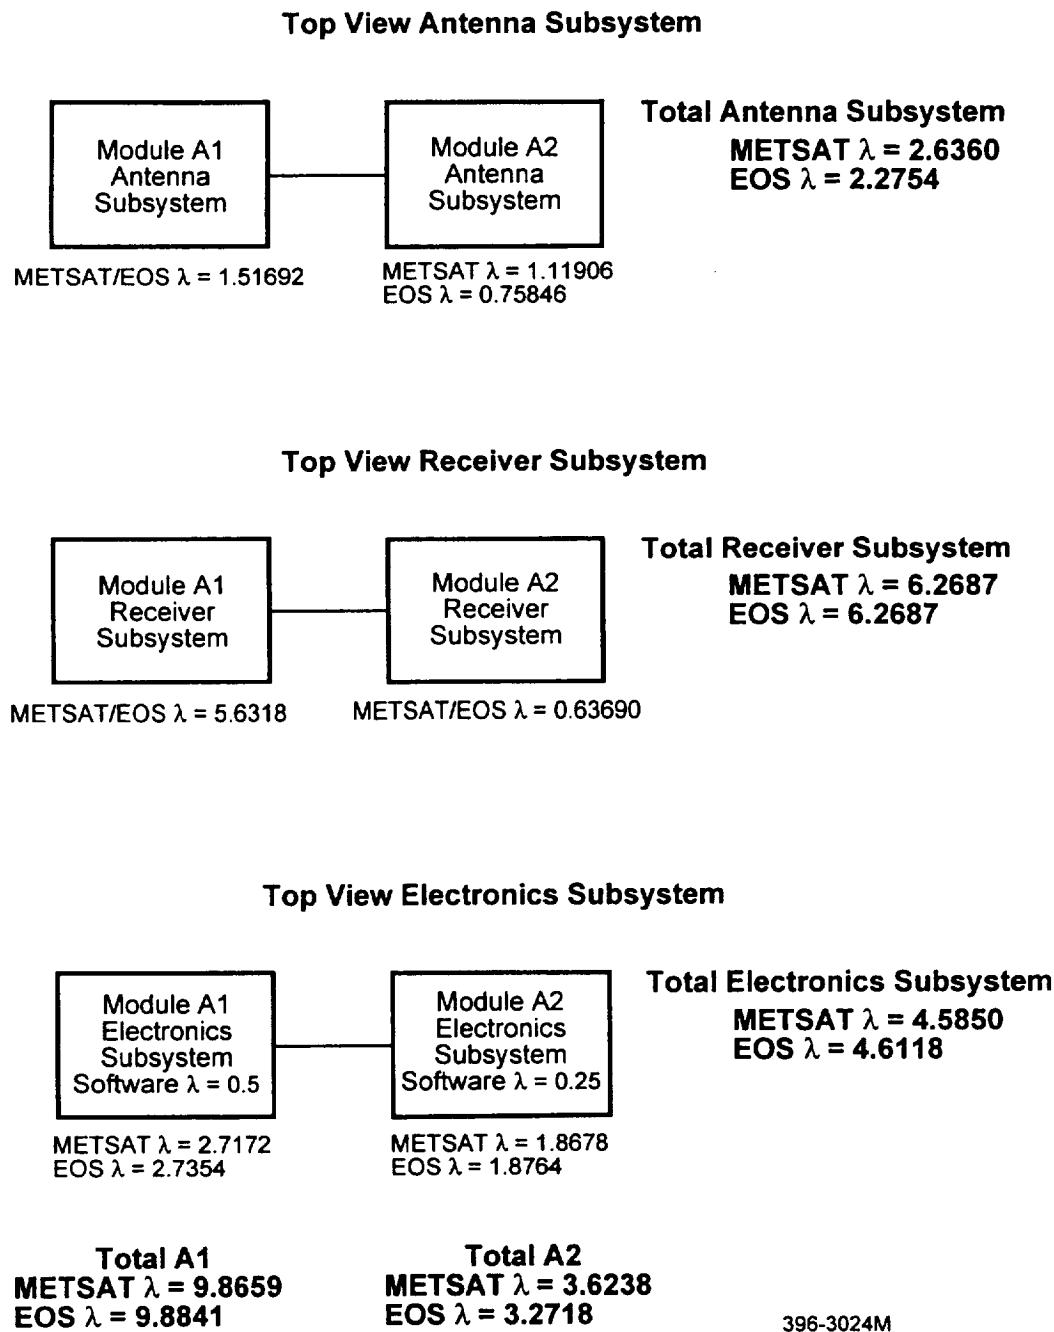


Figure 2 Top View, AMSU-A Module A1 and A2 Reliability Block Diagram



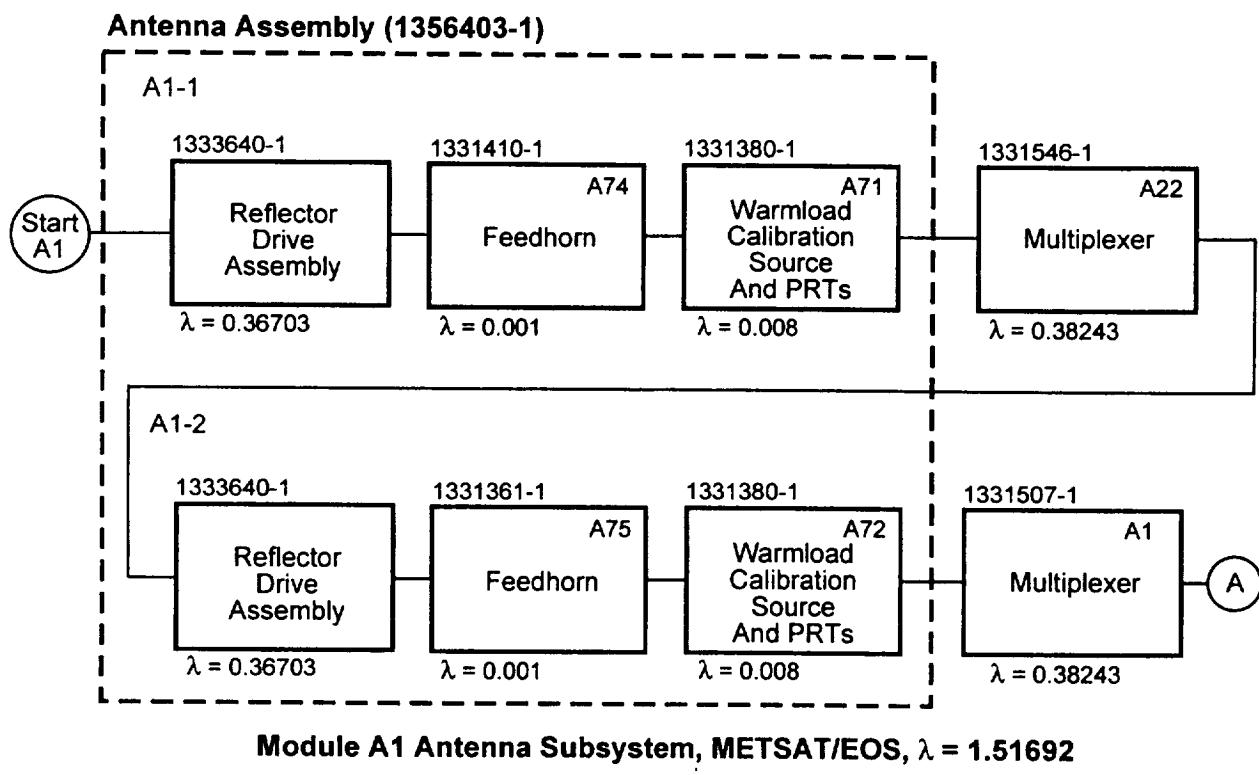


Figure 3 Module A1, Antenna Subsystem, METSAT/EOS Reliability Block Diagram


Common Receiver Elements

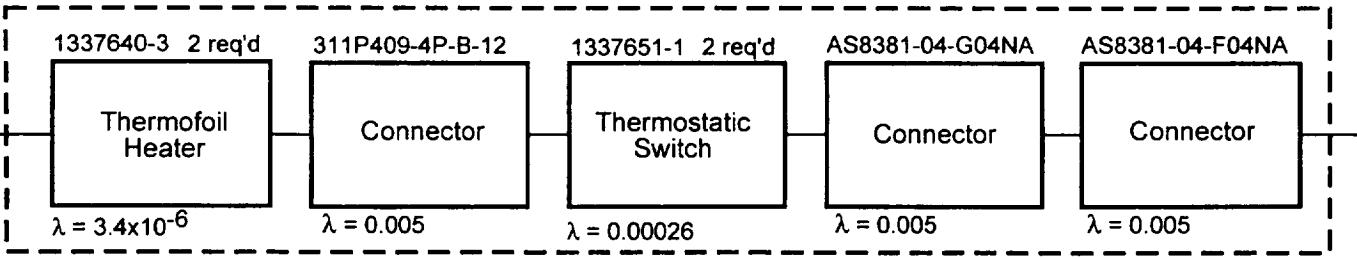

Channel 6 Receiver Elements

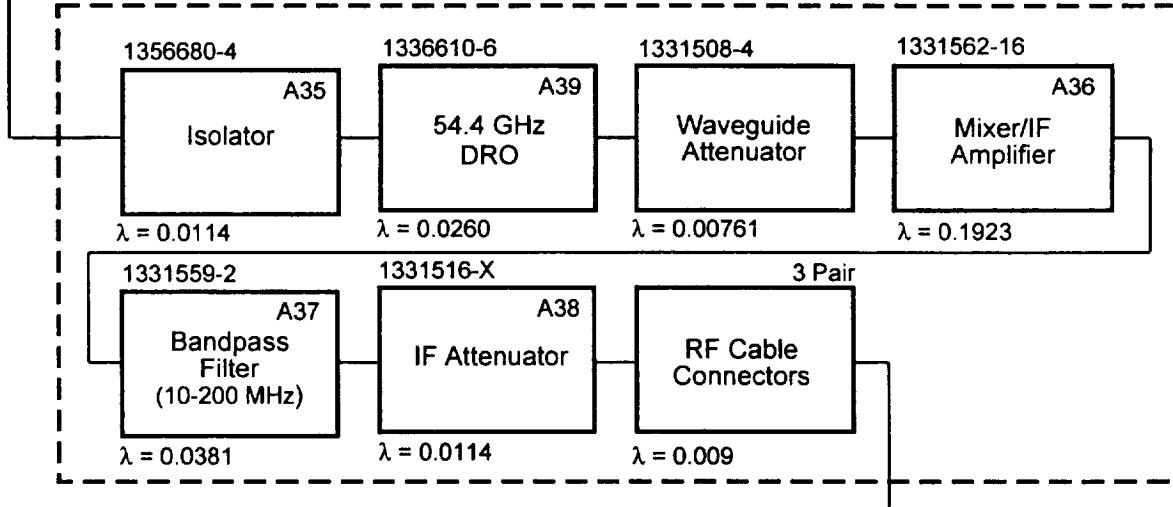


Channel 7 Receiver Elements

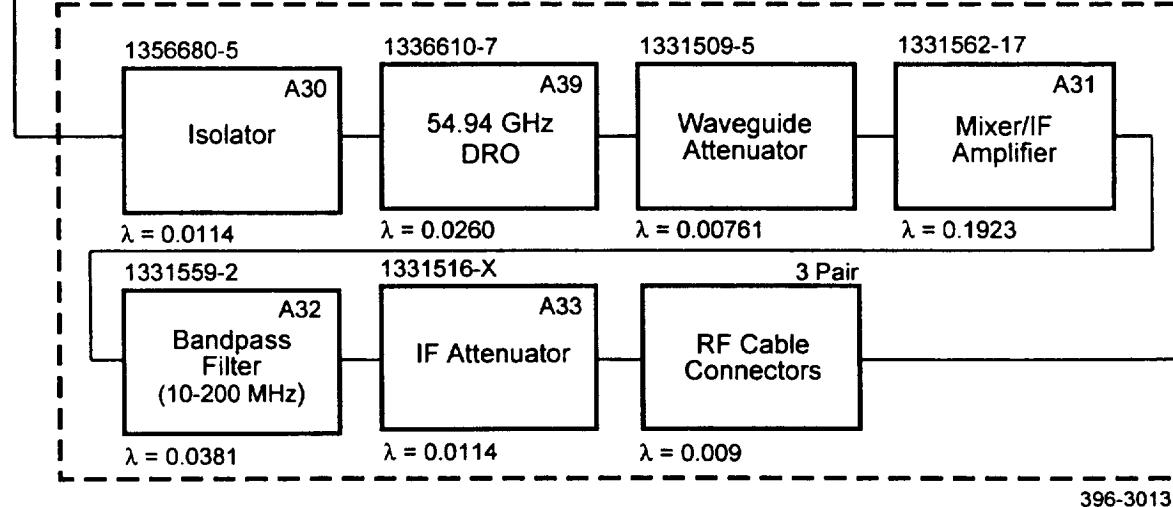


396-3013 M

Figure 4 Module A1, Receiver Subsystem, METSAT/EOS Reliability Block Diagram

Channel 15 Receiver Elements

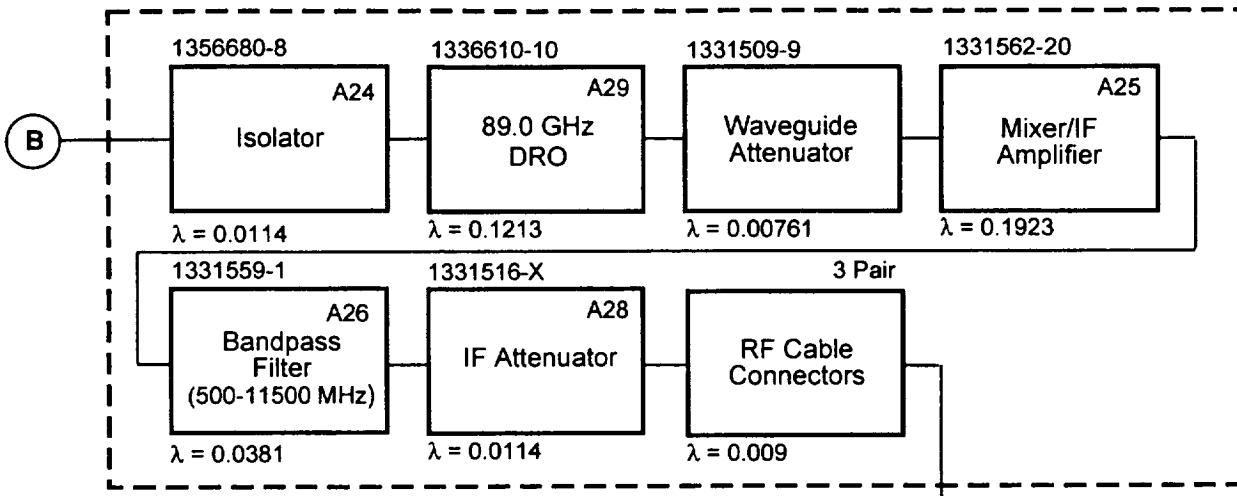

Receiver Channels 9-14 Common Elements

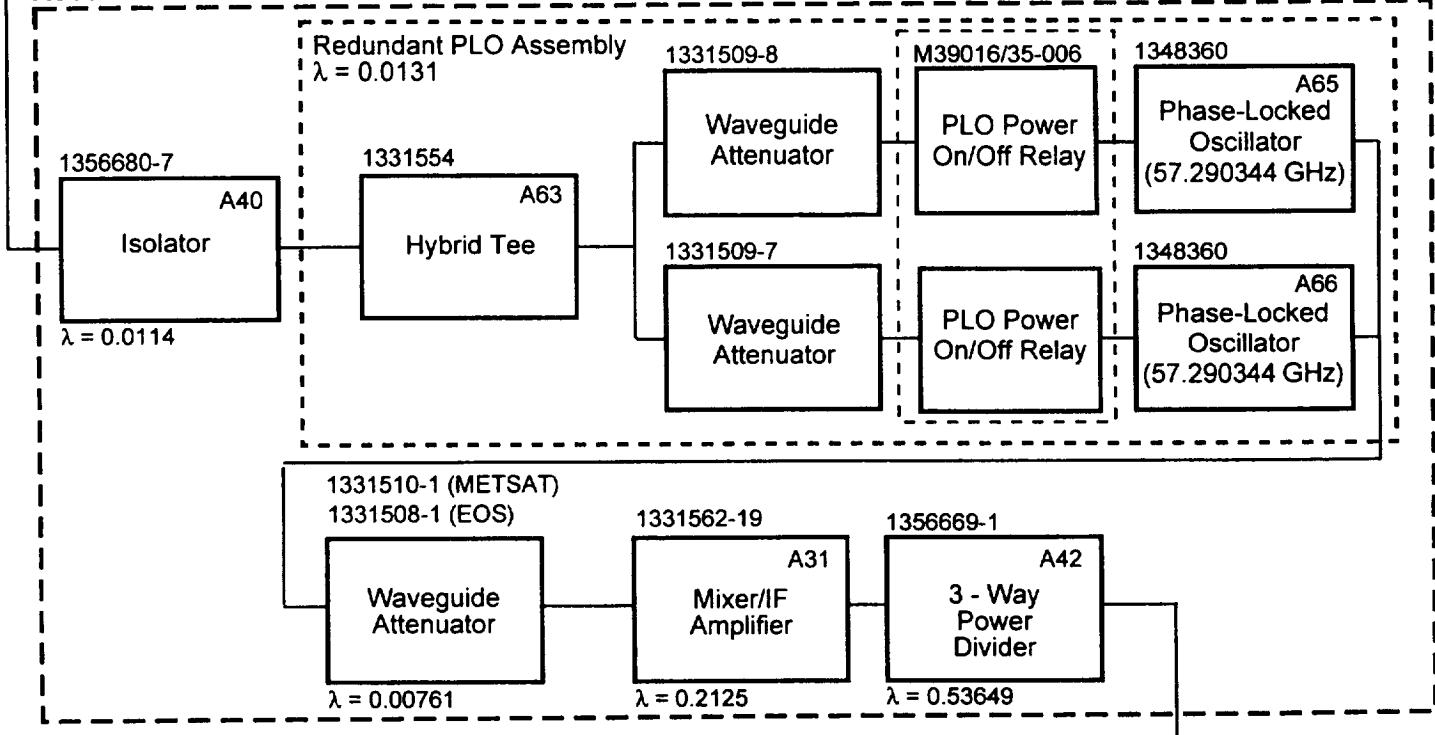

Receiver Channel 9



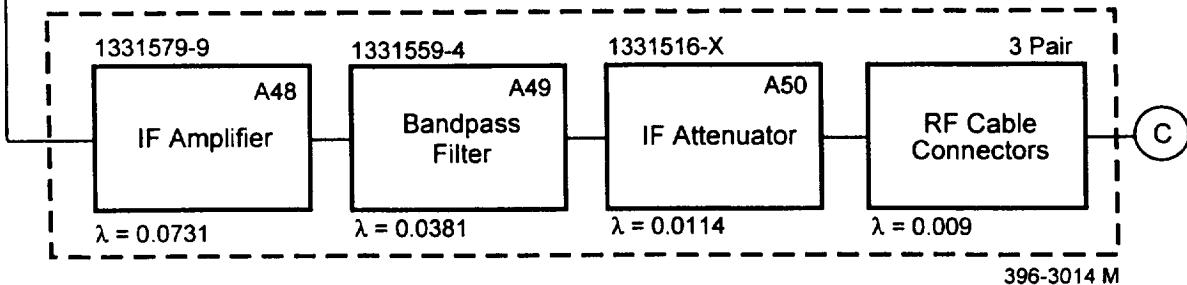


Figure 4 Module A1, Receiver Subsystem, METSAT/EOS Reliability Block Diagram (Continued)


Receiver Channel 10

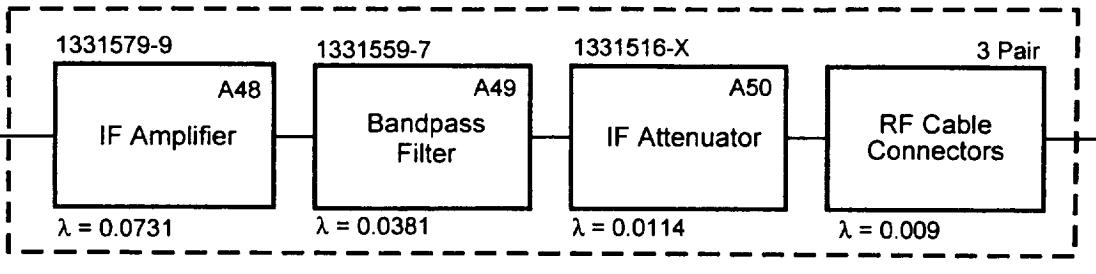


Receiver Channels 11-14 Common Elements

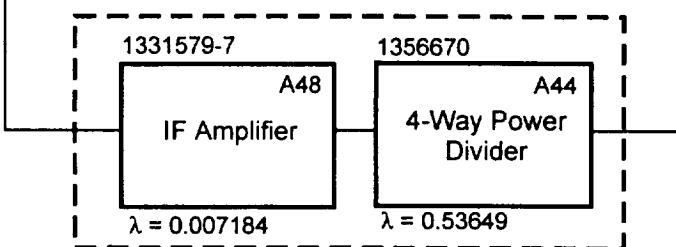


Receiver Channel 11

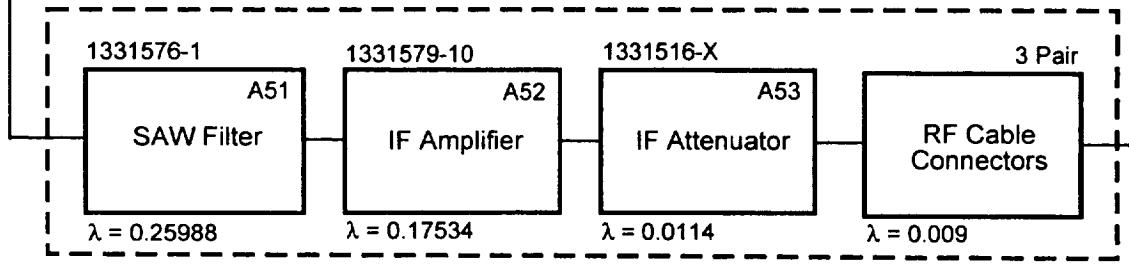

Receiver Channel 12

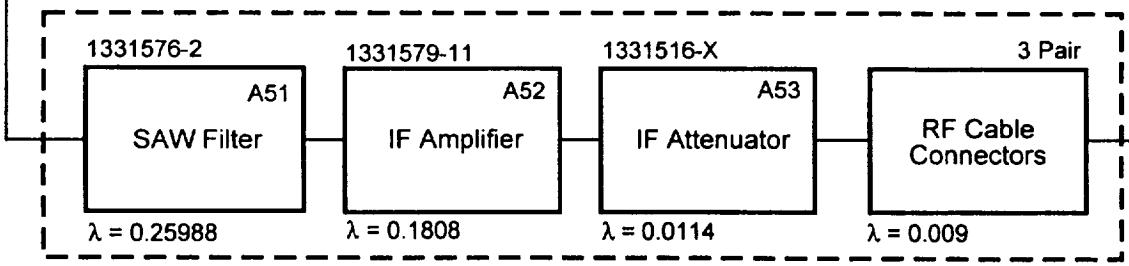

Receiver Channel 13

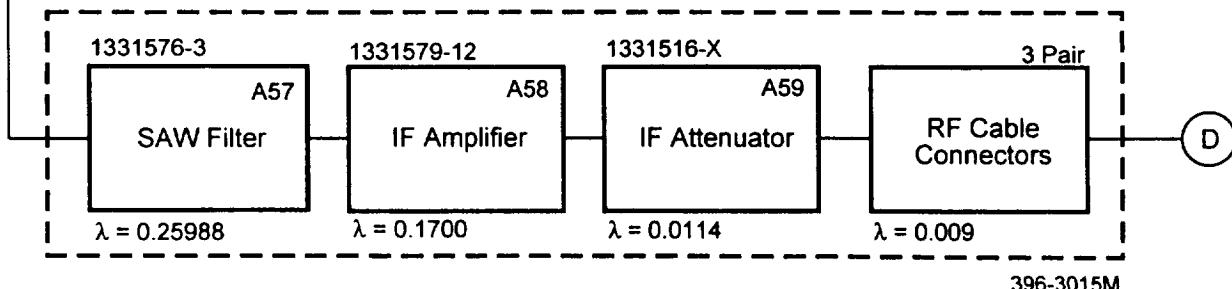

396-3015M

Figure 4 Module A1, Receiver Subsystem, METSAT/EOS Reliability Block Diagram (Continued)



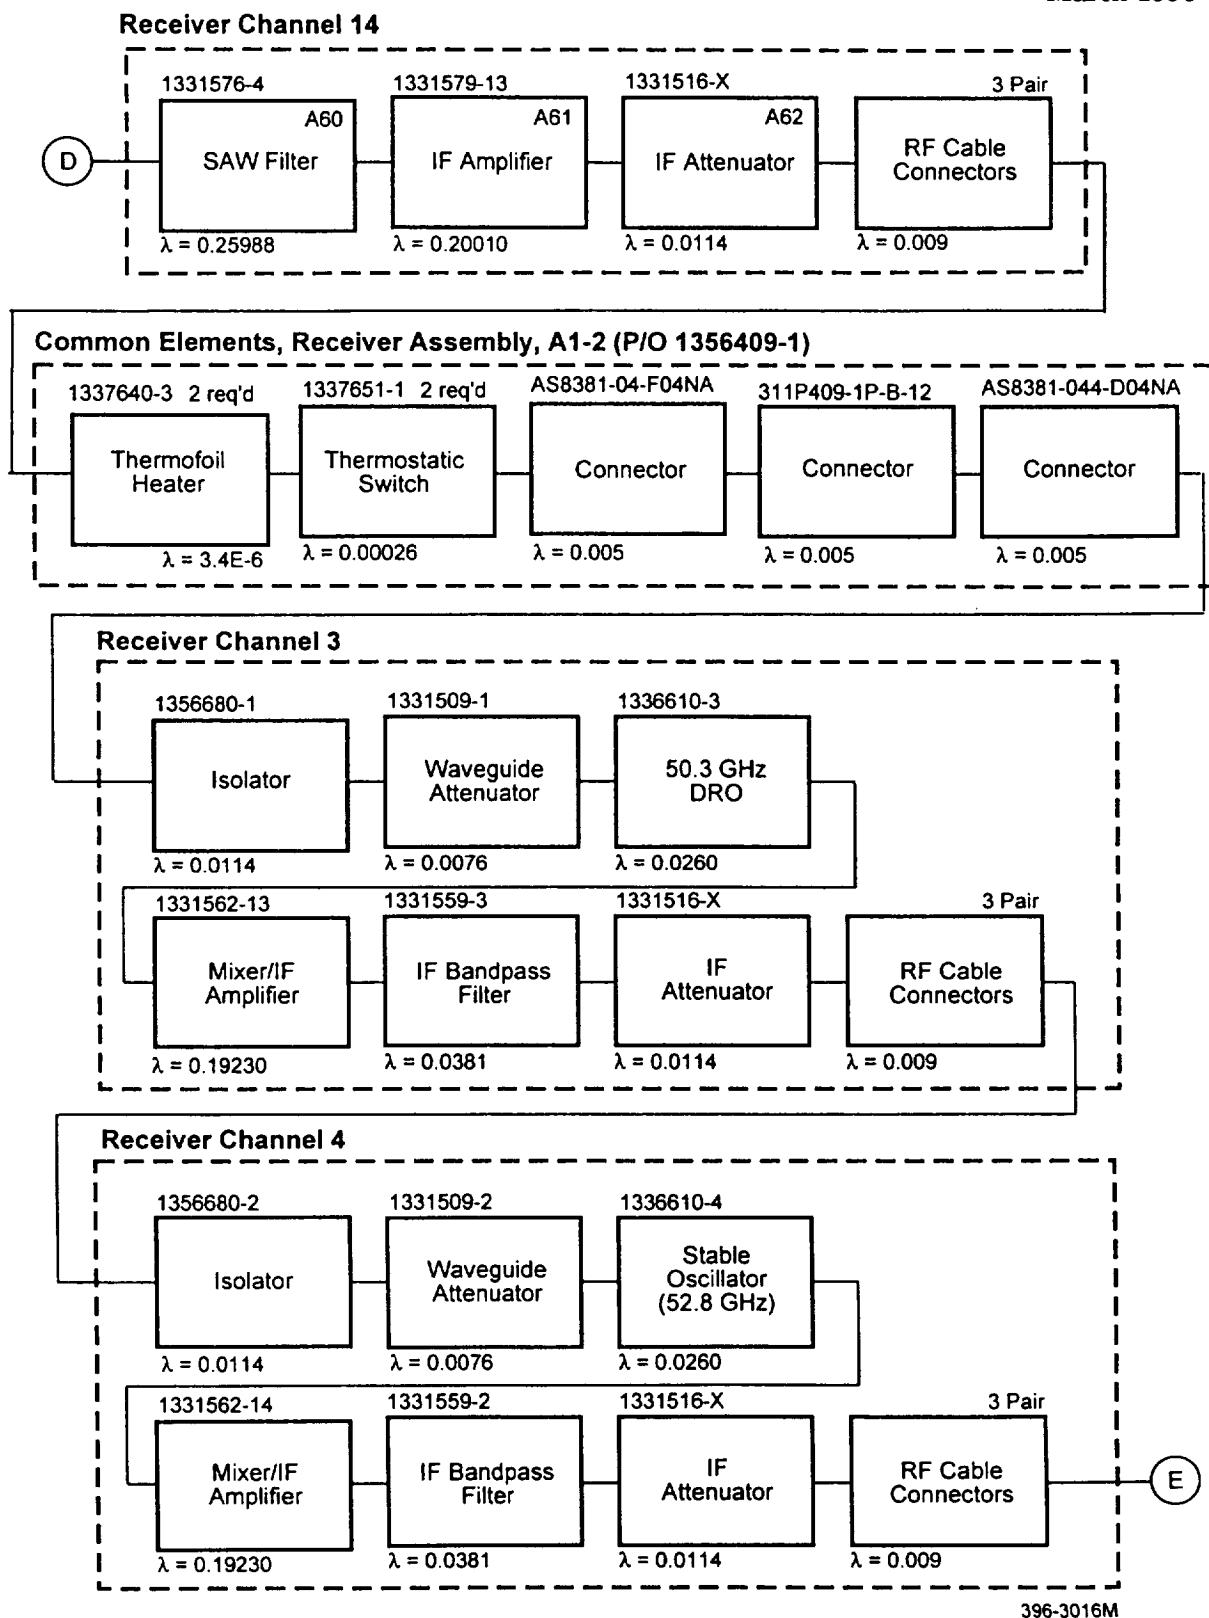


Figure 4 Module A1, Receiver Subsystem, METSAT/EOS Reliability Block Diagram (Continued)

Receiver Channel 5

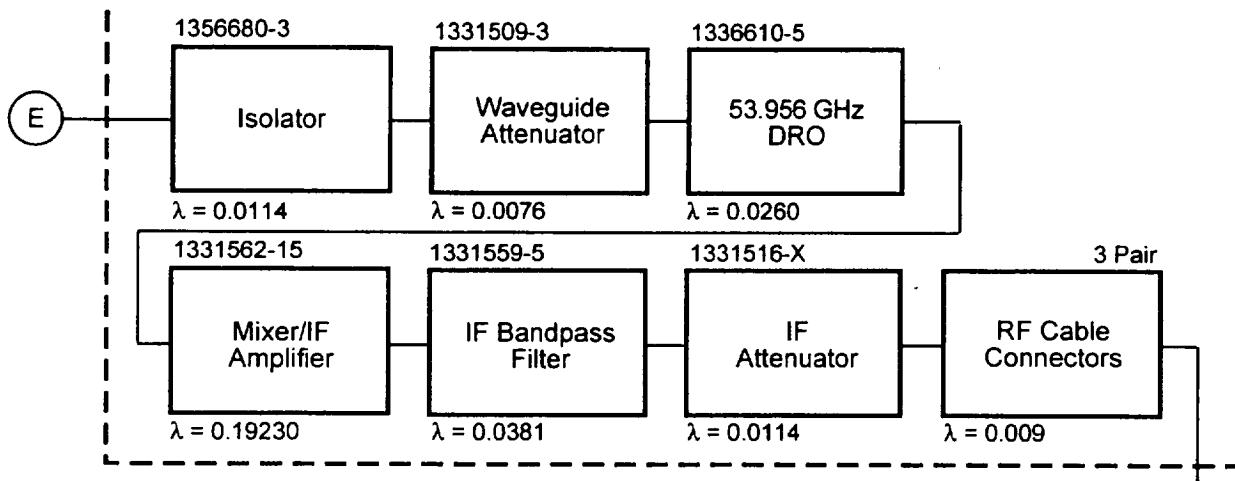

Receiver Channel 8

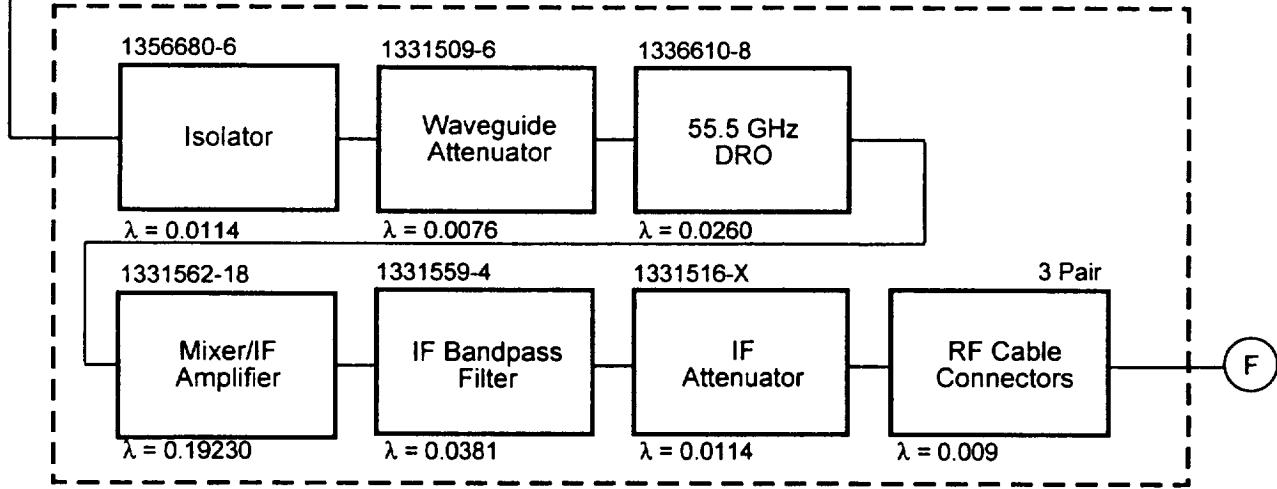

Module A1, Receiver Subsystem, METSAT/EOS $\lambda = 5.6318$

396-3017M

Figure 4 Module A1, Receiver Subsystem, METSAT/EOS Reliability Block Diagram (Continued)


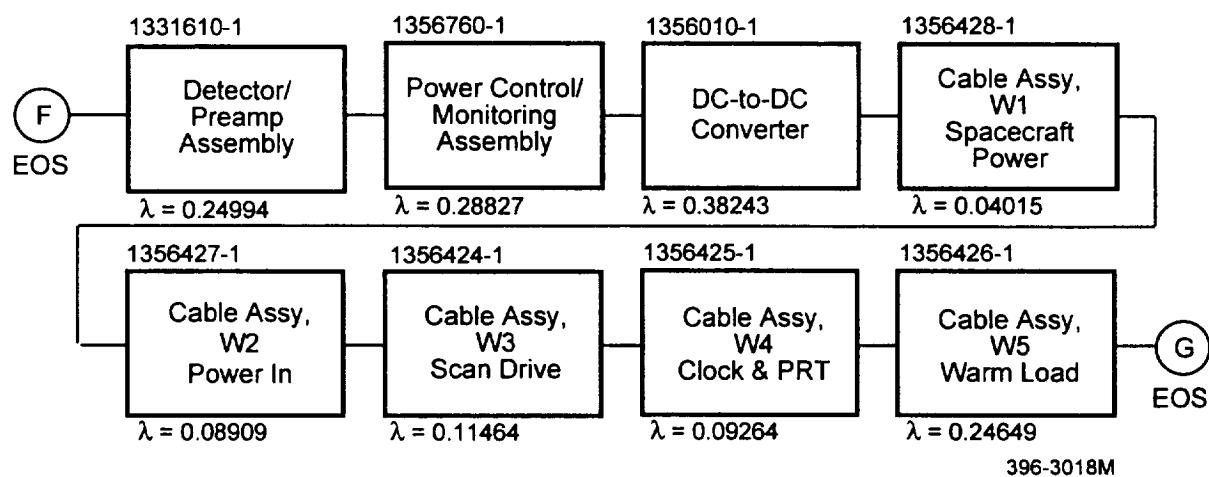


Figure 5 Module A1, Electronics Subsystem, EOS Reliability Block Diagram

Signal Processing Assembly (1356412-1)

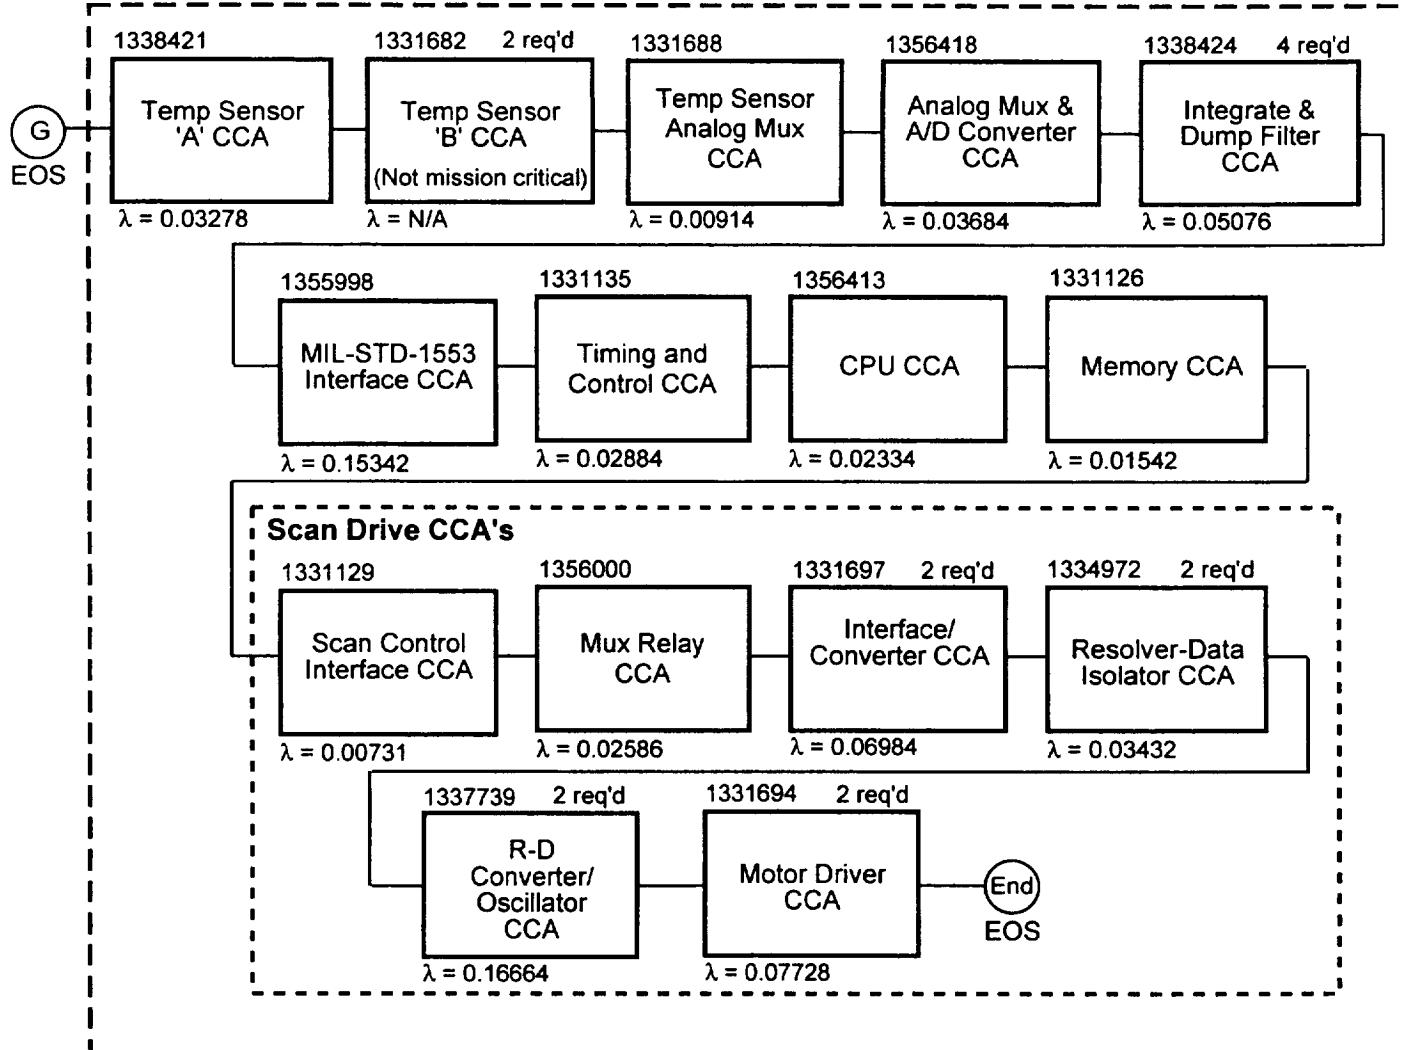

Module A1, Electronics Subsystem, EOS $\lambda = 2.2354$

396-3019M

Figure 5 Module A1, Electronics Subsystem, EOS Reliability Block Diagram (Continued)

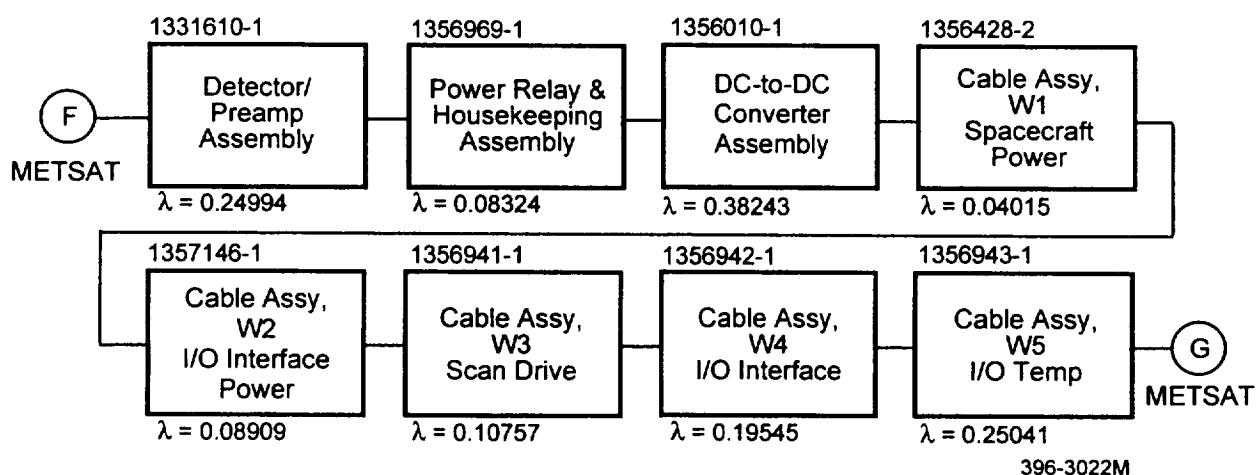


Figure 6 Module A1, Electronics Subsystem, METSAT Reliability Block Diagram


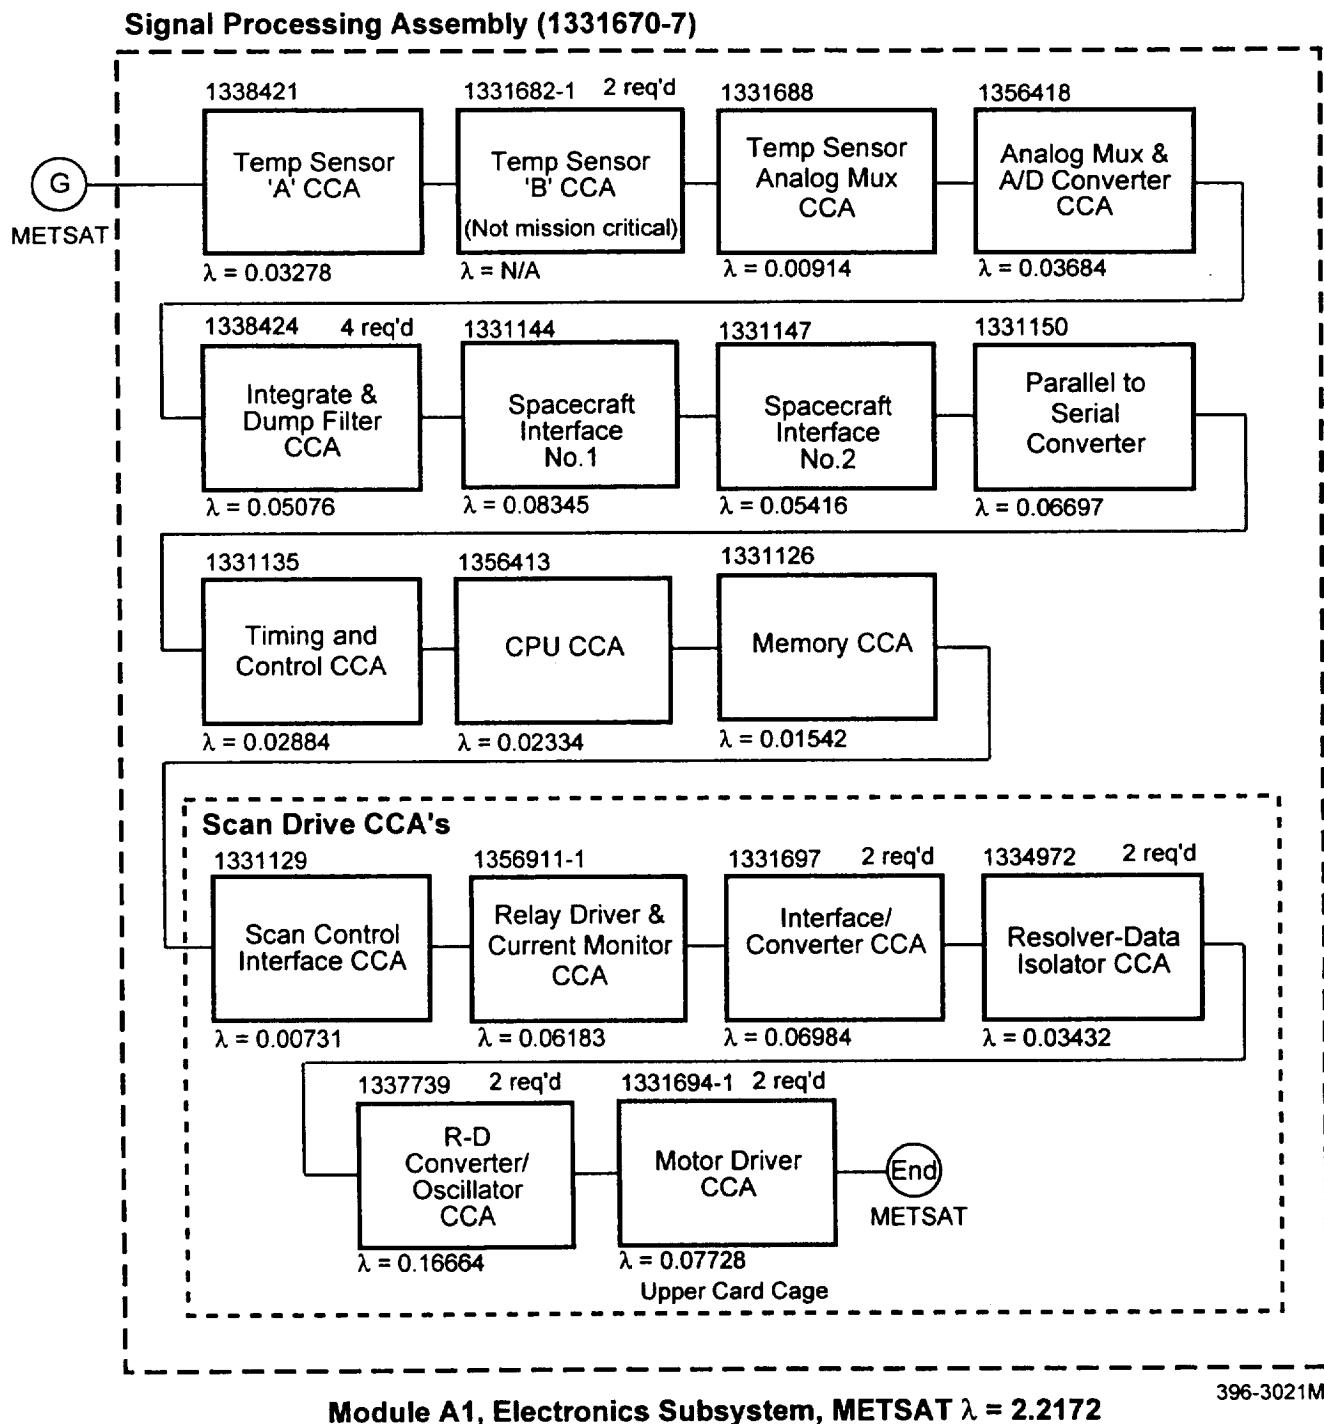



Figure 6 Module A1, Electronics Subsystem, METSAT Reliability Block Diagram (Continued)

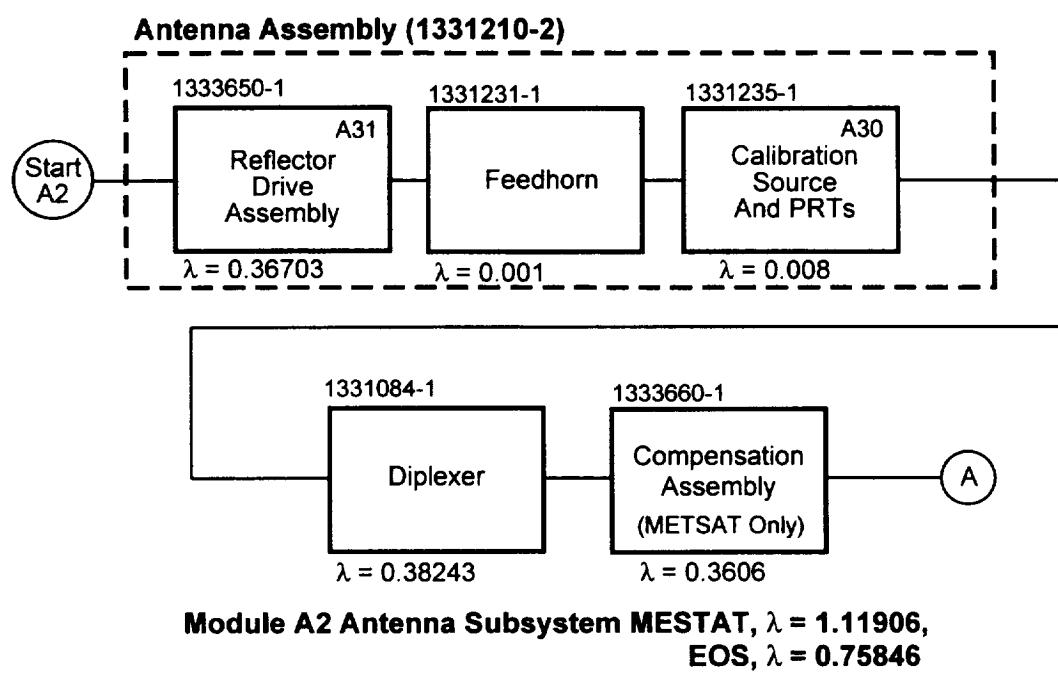


396-3007M

Figure 7 Module A2, Antenna Subsystem, METSAT/EOS Reliability Block Diagram


Common Receiver Elements

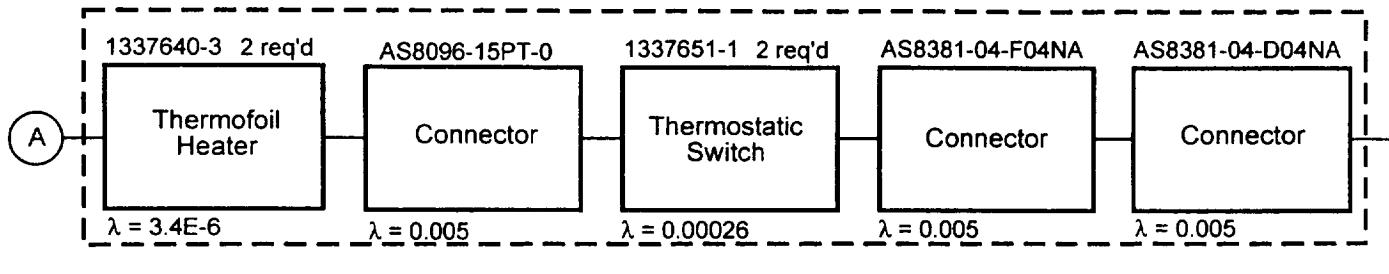

Channel 1 Receiver Elements

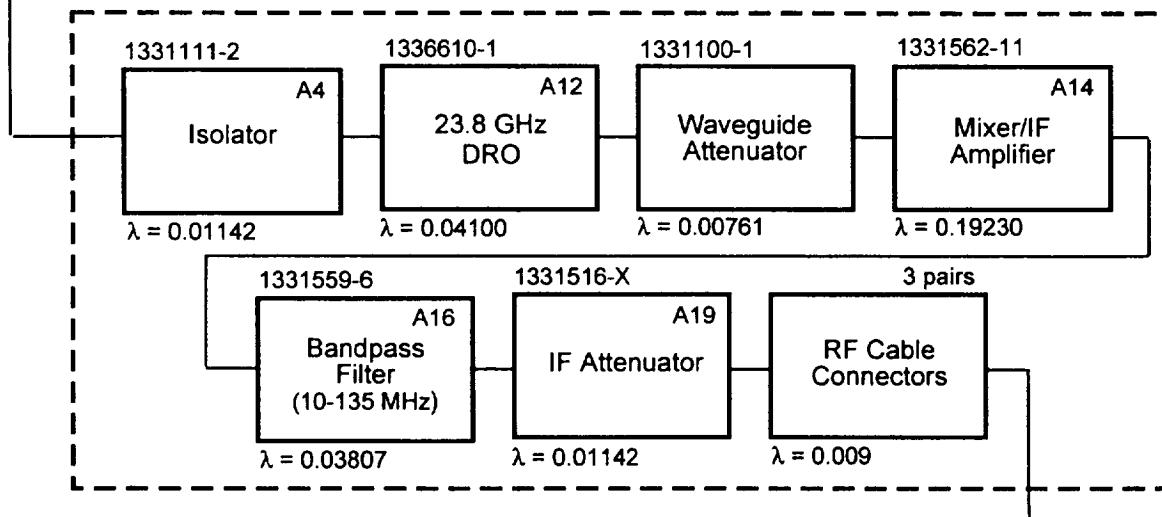

Channel 2 Receiver Elements

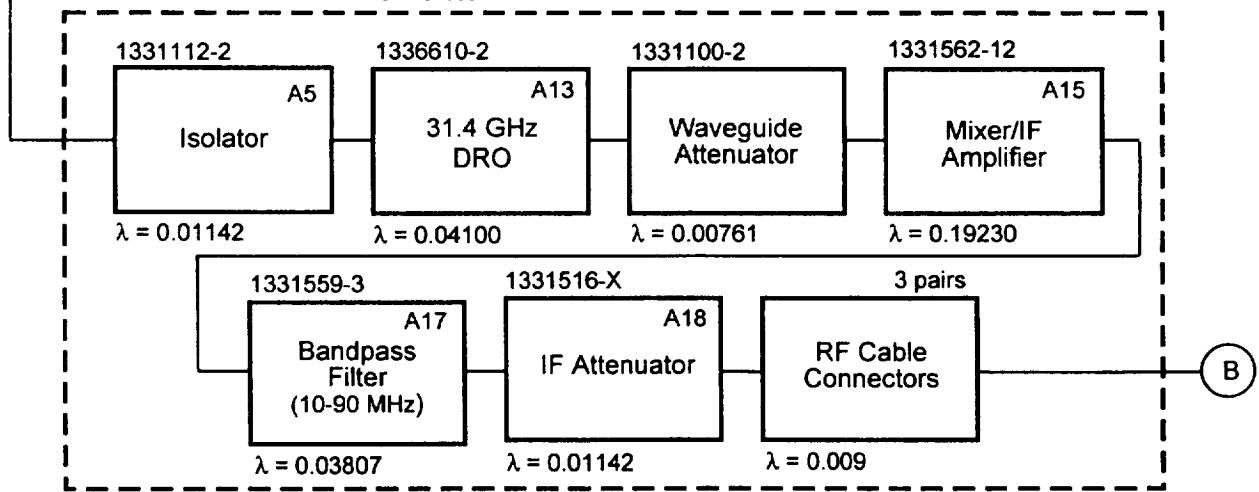

Module A2, Receiver Subsystem, METSAT/EOS $\lambda = 0.6369$

396-3008M

Figure 8 Module A2, Receiver Subsystem, METSAT/EOS Reliability Block Diagram


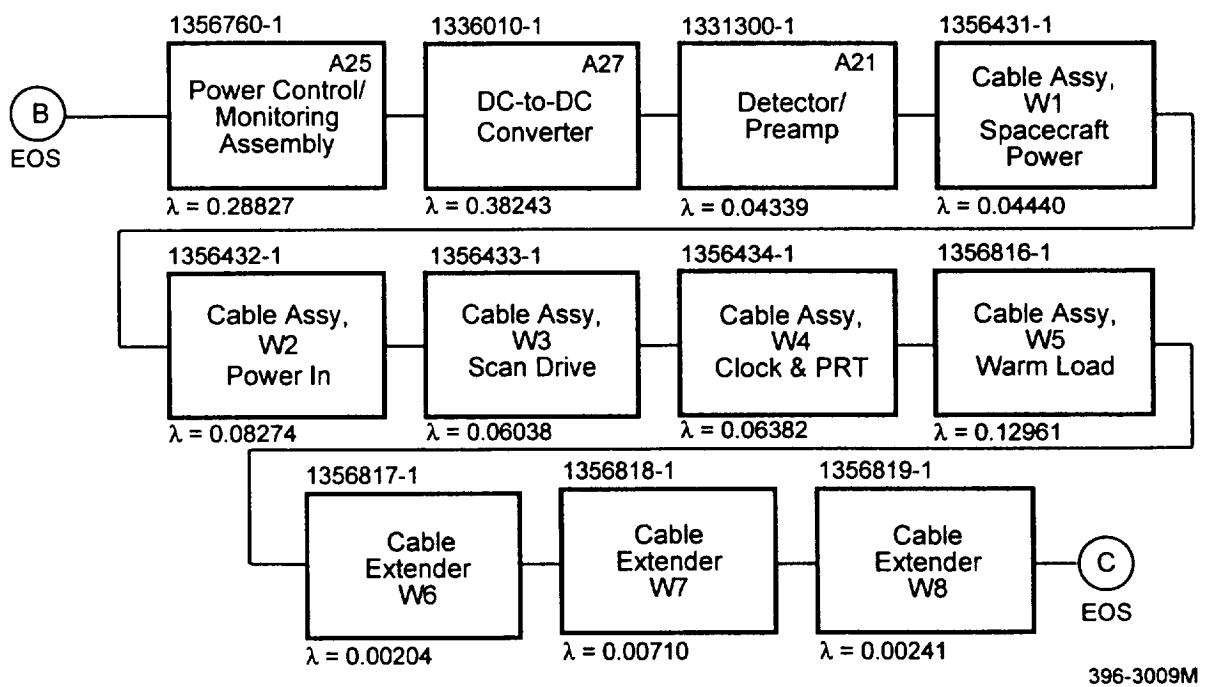


Figure 9 Module A2, Electronics Subsystem, EOS Reliability Block Diagram


Signal Processing Assembly (1356439-1)

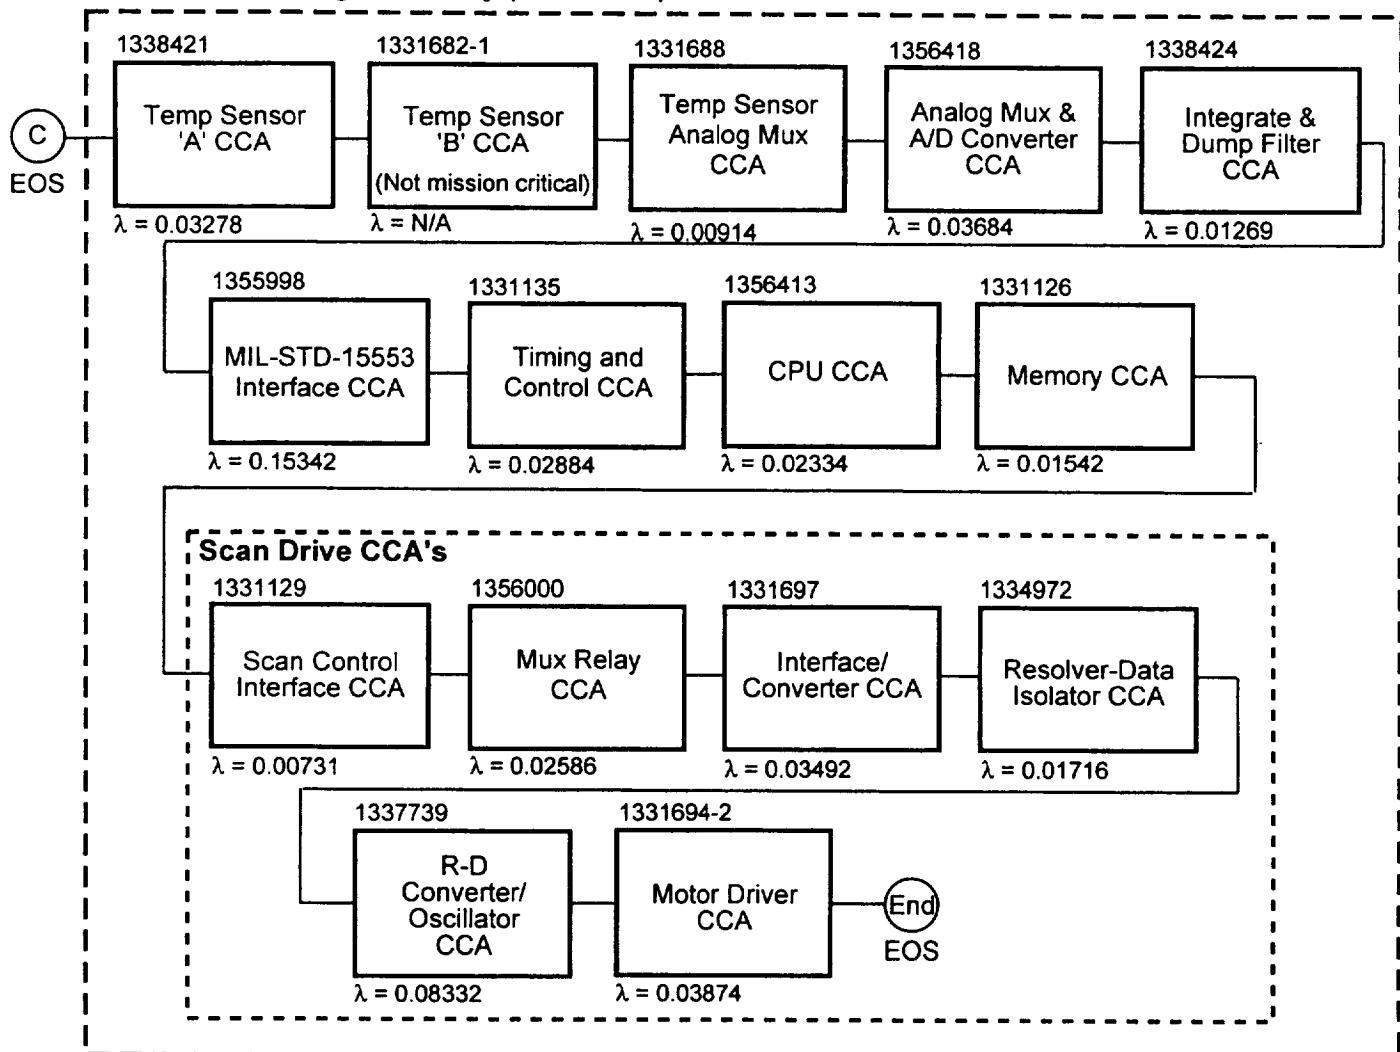

Module A2, Electronics Subsystem, EOS $\lambda = 1.62637$

396-3023M

Figure 9 Module A2, Electronics Subsystem, EOS Reliability Block Diagram (Continued)

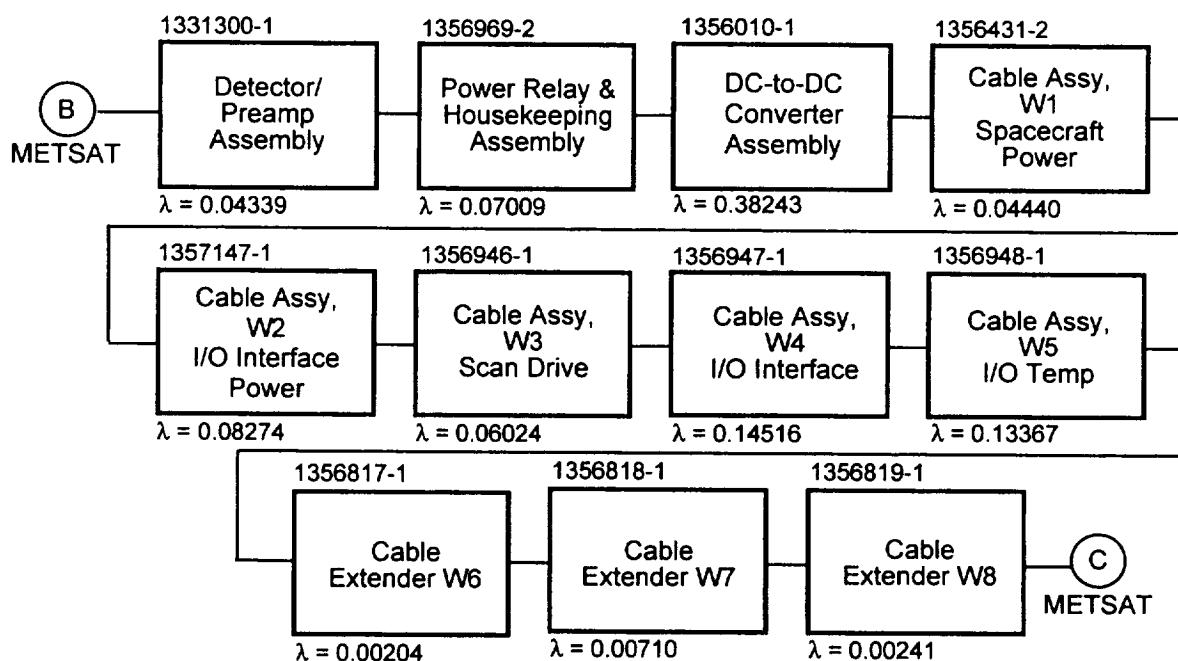

396-3020M

Figure 10 Module A2, Electronics Subsystem, METSAT Reliability Block Diagram

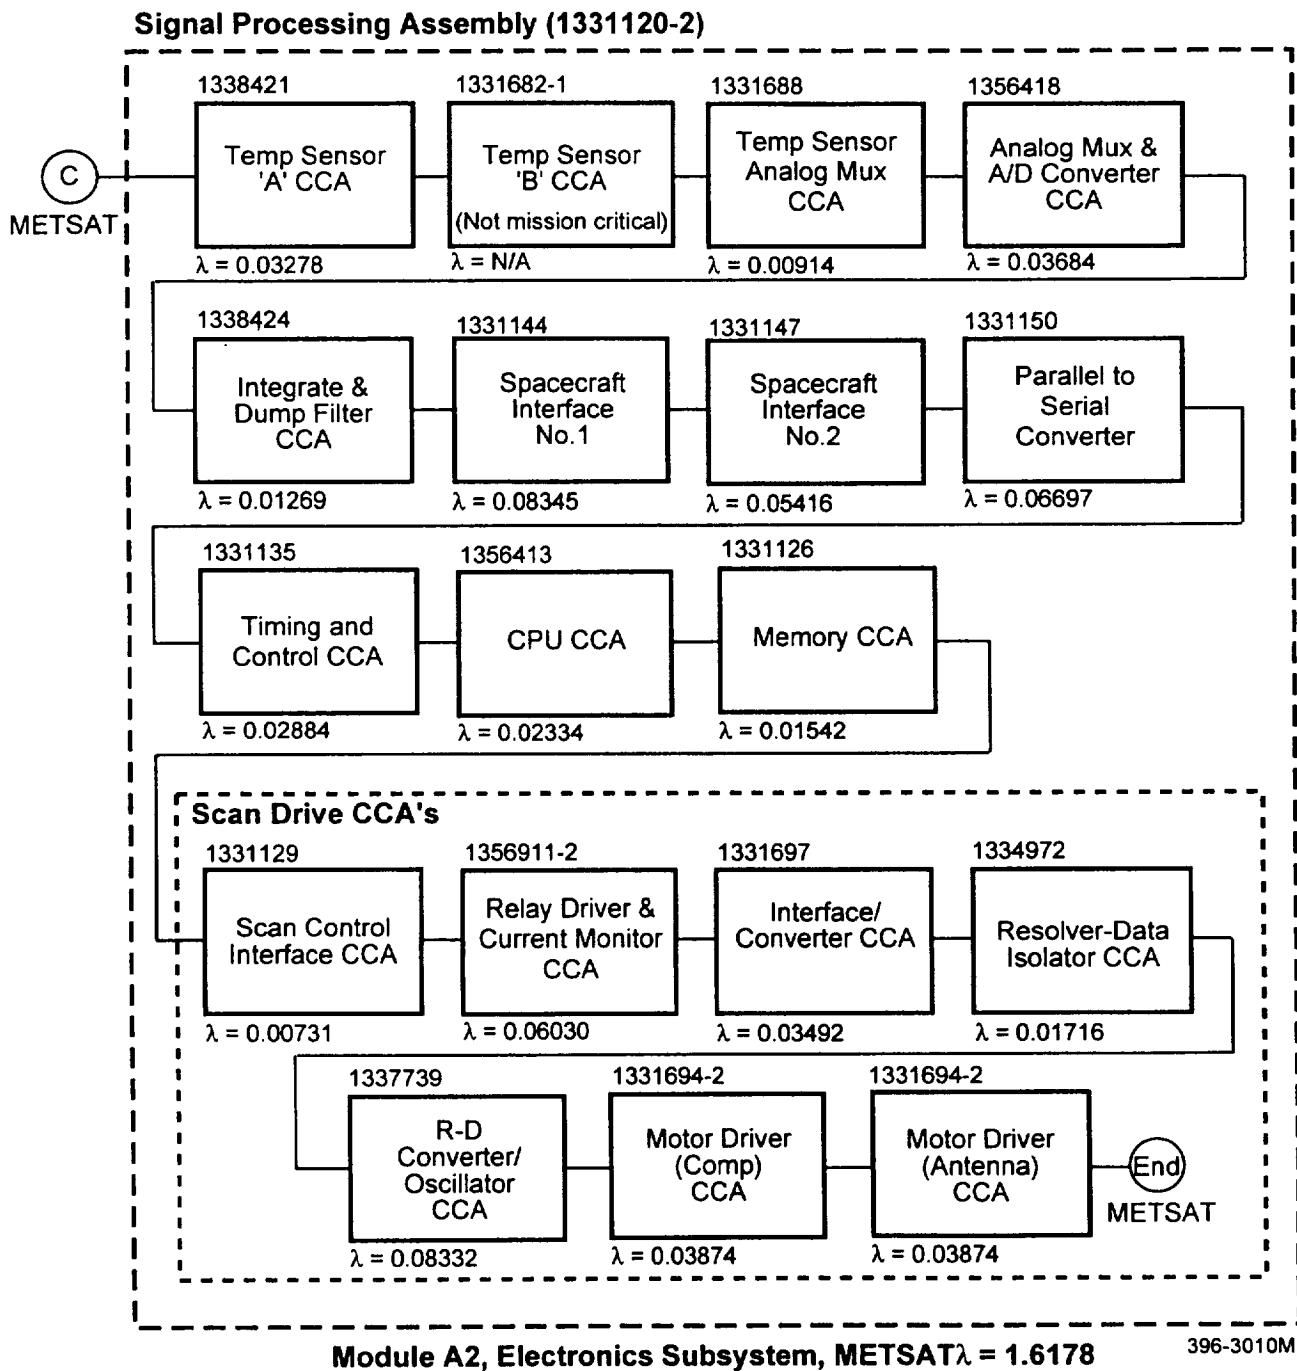


Figure 10 Module A2, Electronics Subsystem, METSAT Reliability Block Diagram (Continued)

Section 6

IMPROVEMENTS

Table III provides METSAT changes from K-L-M. Differences between EOS and METSAT instruments are discussed in Section 7, herein.

Table III AMSU-A METSAT Changes From K-L-M

Item	Change	Reason for Change
A1 Upper Card Rack	Changed from 4 CCA to 2 CCA (2 motor driven CCA).	Power Control Logic and Analog Housekeeping CCA combined for improved reliability
A1 Lower Card Rack	New Relay Driver CCA added, requiring shifting of other cards one slot.	Repositioning of cards to minimize risk of crosstalk and maximize interconnect efficiency.
A2 Card Rack	2 CCA deleted, 1 CCA added, 7 CCA shifted 2 slots in card rack.	Repositioning of cards to minimize risk of crosstalk and maximize interconnect efficiency.
Motor Drive Transistors	Were bulkhead mounted and hard-wired, now are integral part of cable assembly as transistor/diode assembly	Wired as part of cable assembly to eliminate wiring at system level, combined with transient suppression diodes on assembly for best performance.
DC-DC converter	New design	Power requirements changed because of change from GDO to DRO in receiver and new supplier.
System Interconnect	New connectorized harness	Reduce system noise and reduce integration and test time.
CPU CCA	Different RAM used and additional clock buffering added.	A. RAM discontinued B. Buffer drive margin added
Analog MUX and A/D CCA	Part of radiation latchup removal redesigned.	Dual PNP transistor no longer available.
Motor Driver CCA	Current and gain limiter resistors moved to power relay assembly. Diodes moved to Transistor/Diode assembly.	Removes motor drive current from A2 card cage to minimize system noise, A1 modified for commonality.
Power Control Relay and Analog Housekeeping CCA	No longer used.	High current functions in A1 upper card cage moved to new Power Relay Assembly and to new Relay Driver CCA.
28V Switching Assembly and Power Distribution Terminal Boards	No longer used.	Functions now contained in new Power Relay Assembly.
PLO Relay	Moved from deleted Power Control Logic CCA to Receiver shelf.	CCA deleted

The METSAT/EOS AMSU-A instruments have one redundant circuit. This circuit provides redundant 57.29034GHz PLOs for channels 9-14 (see Figure 4). Only one PLO is active during operation and switching is provided by a latching relay having two coils, one for each position of the contacts. One contact position selects the primary PLO, the other position selects the redundant PLO.

Section 7

FUNCTIONAL DESCRIPTION OF METSAT/EOS AMSU-A INSTRUMENTS

The AMSU-A instrument is a multichannel radiometer that will be used for measuring global atmospheric temperature profiles.

The AMSU-A instrument is a line-scan microwave sensor designed to measure scene radiance in 15 channels to permit the calculation of the vertical temperature profile from the surface of the Earth to approximately the 3 millibar pressure height.

The ability of passive microwave sensors to operate in the presence of clouds is the essence of their effectiveness and has led to their development for this AMSU-A instrument.

7.1 *AMSU-A1 and AMSU-A2 Modules*

The AMSU-A instrument is implemented in two separate modules, AMSU-A1 and AMSU-A2. The two lowest frequencies (Channels 1 and 2) are placed into the AMSU-A2. The antenna for AMSU-A2 is much larger, about 12 inches in width; whereas AMSU-A1 uses two smaller antennas, each about 5 inches in width, for Channels 3 through 15.

The basic operation of these two modules is very similar. They use the same approach and techniques to perform their function. Each of these two modules shares many of the same subassemblies, circuit card assemblies, and other items.

Each module is configured in the same fashion, and consists of three major subsystems: (a) antenna subsystem, (b) receiver subsystem, and (c) electronics subsystem. In each module, the basic design of each subsystem is the same, differing only as a result of the specific frequencies.

In the 13-channel module, identified as AMSU-A1, two separate and independent antenna, receiver, and electronic subsystems are integrated into a single common mechanical/structural and thermal subassembly.

7.1.1 *Receiver Subsystem*

7.1.1.1 *Subsystem Description*

The AMSU-A1 Receiver Subsystem is composed of the functional receiver elements and the structural members, called the receiver shelves, required to support the receiver elements and interface to the AMSU-A instrument structure.

The AMSU A1 and AMSU-A2 Receiver Subassemblies are shown in block diagram form in Figures 11 and 12 respectively. The Receiver Subsystem processes fifteen microwave channels. These channels are distributed amongst the receiver shelves as follows:

A1-1 Receiver Shelf	Channels 6, 7, and 9 through 15
A1-2 Receiver Shelf	Channels 3, 4, 5, and 8
A2 Receiver Shelf	Channels 1 and 2

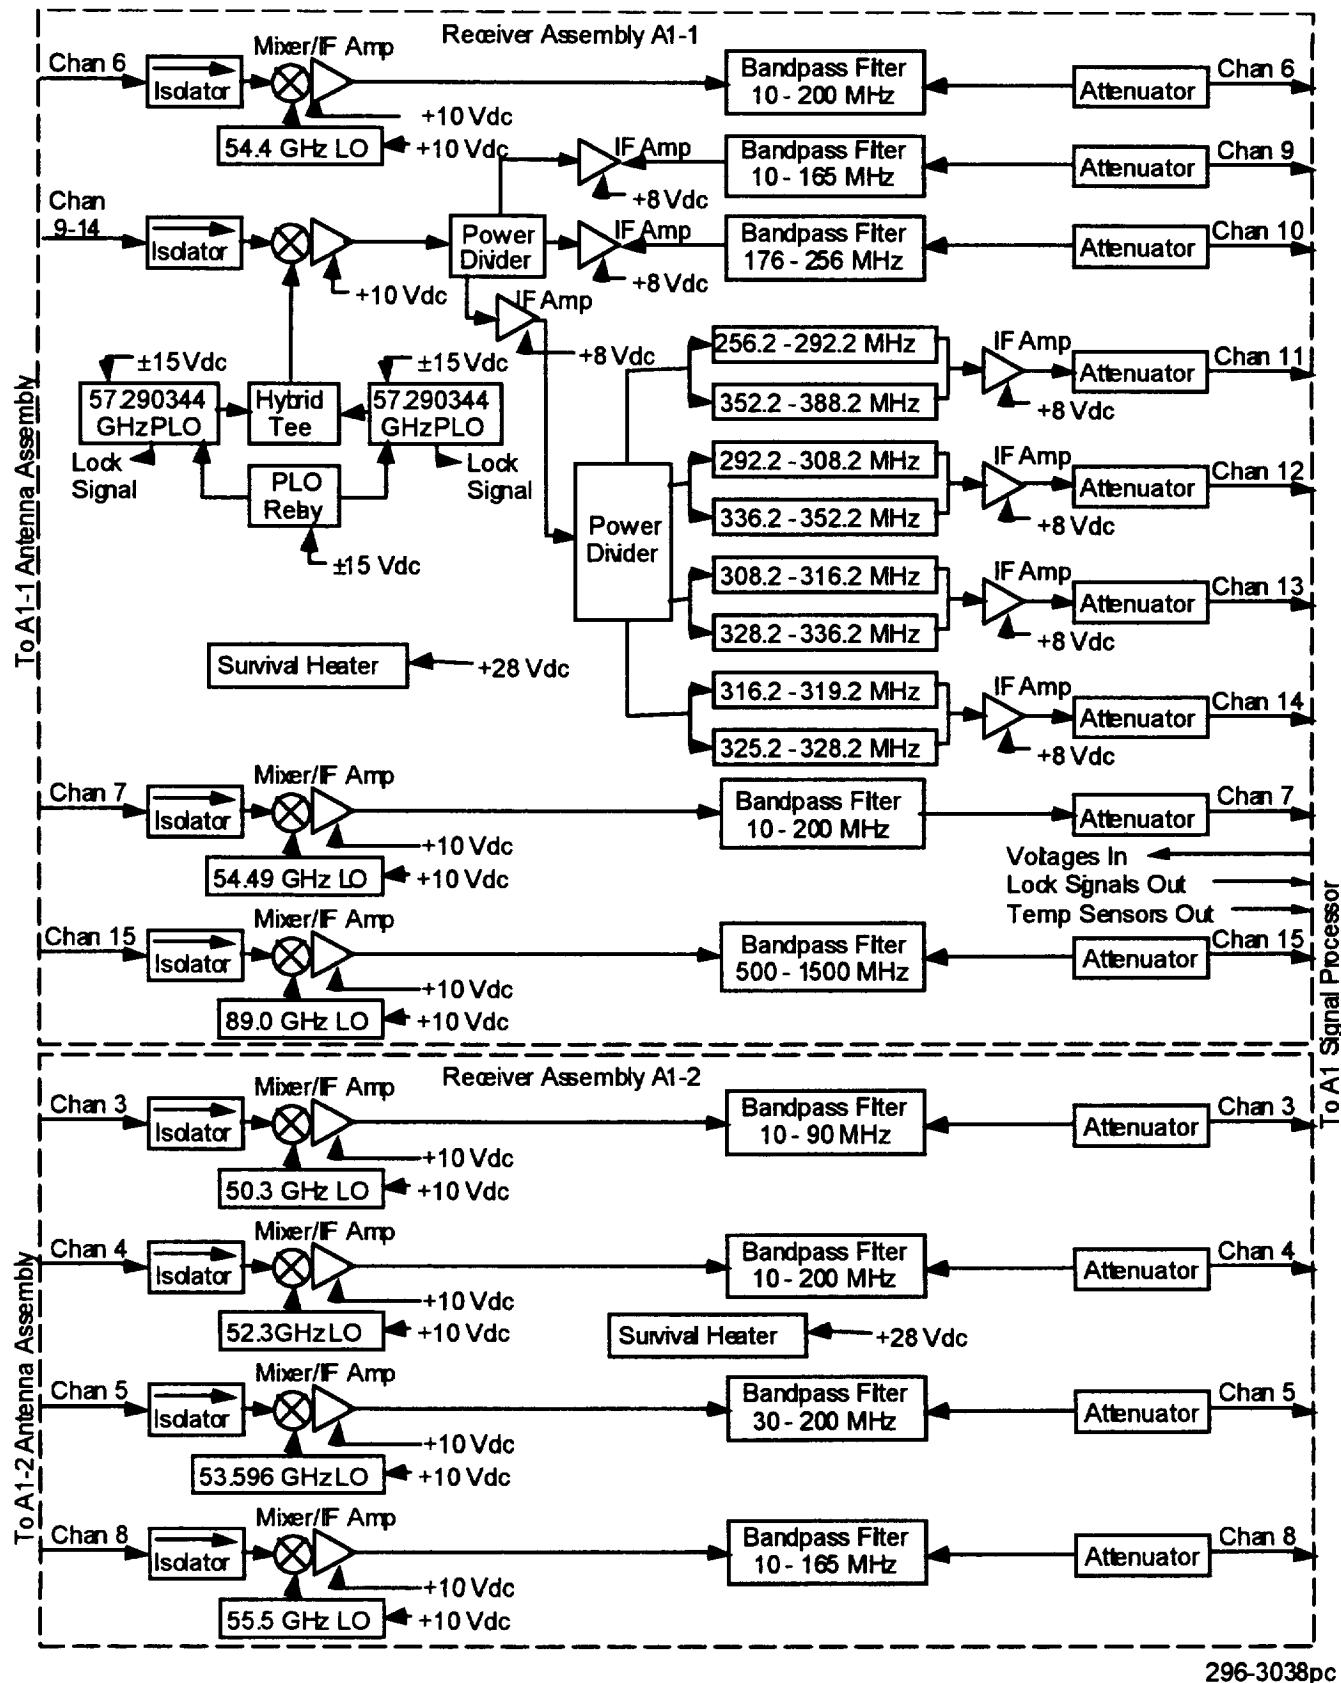


Figure 11 AMSU-A1 Receiver Functional Block Diagram

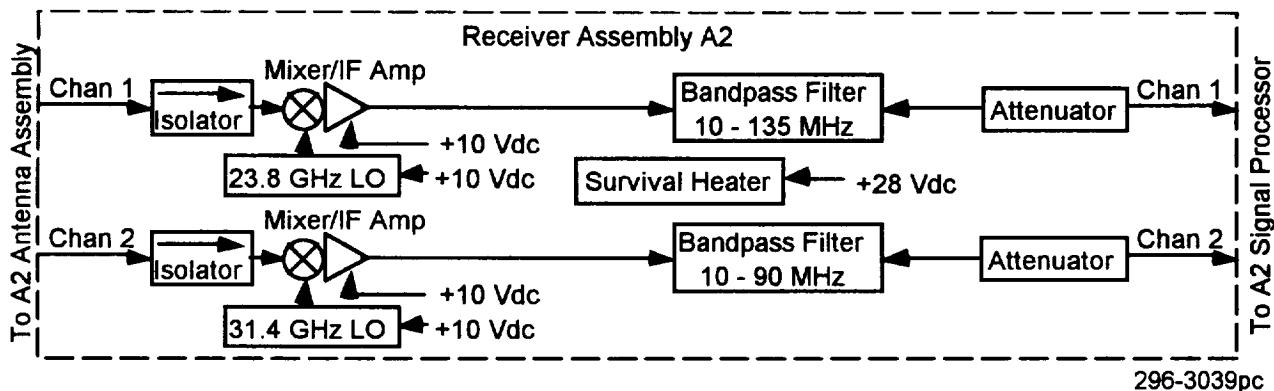


Figure 12 AMSU A2 Receiver Functional Block Diagram

7.1.1.2 Subsystem Interface Definition

The Receiver Subsystem functional interfaces are as follows:

Inputs

Microwave signal inputs from the Antenna Subsystem connect directly to the antenna multiplexer output ports via waveguide flange connections.

Voltage inputs from the Power Distribution Assembly of the Electronics Subsystem connect via electrical connectors on each receiver shelf.

Outputs

IF attenuator signal outputs from each channel connect via semirigid coaxial connectors to the Signal Processing Assembly of the Electronics Subsystem.

Temperature sensors and diagnostic sensors connect via electrical connectors on each receiver shelf to the Signal Processing Assembly of the Electronics Subsystem.

7.1.2 Electronics Subsystem

7.1.2.1 Subsystem Description

The Electronics Subsystem is composed of the electronic elements necessary to provide power, control, commands, data handling, and the electrical interface with the

METSAT and EOS spacecraft for the AMSU-A instrument.

The AMSU-A1 and AMSU-A2 Electronic Subassemblies are shown in block diagram form in Figures 11 through 14. Figures 11 and 12 show the METSAT and EOS AMSU-A1 Electronics Subassemblies respectively. Figures 13 and 14 show the METSAT and EOS AMSU-A2 Electronics Subassemblies, respectively.

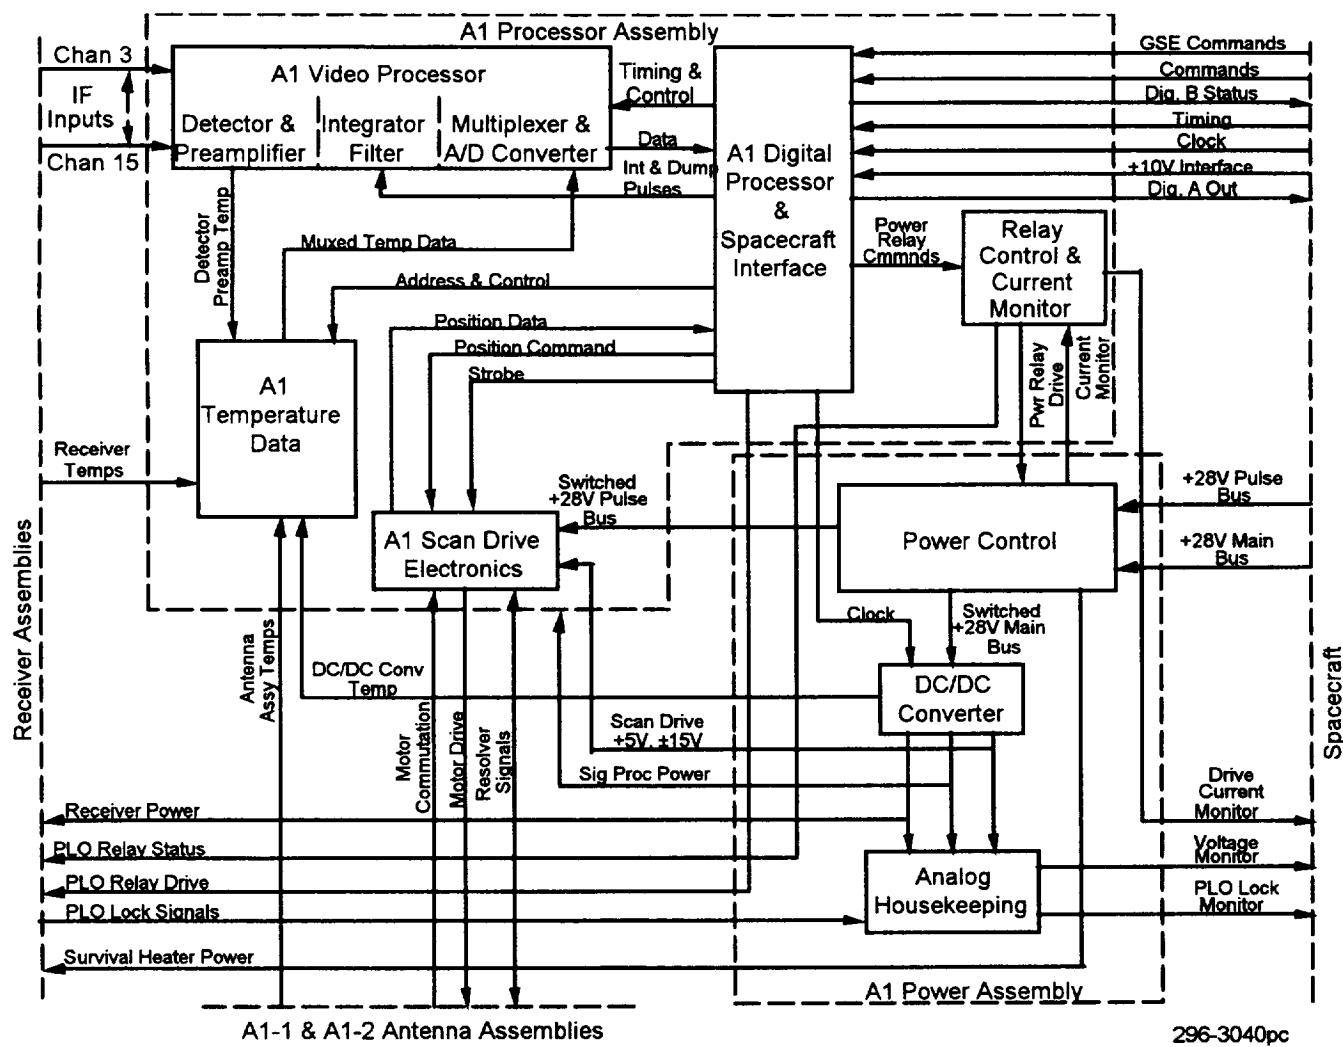


Figure 13 METSAT AMSU A1 Electronics Subassembly

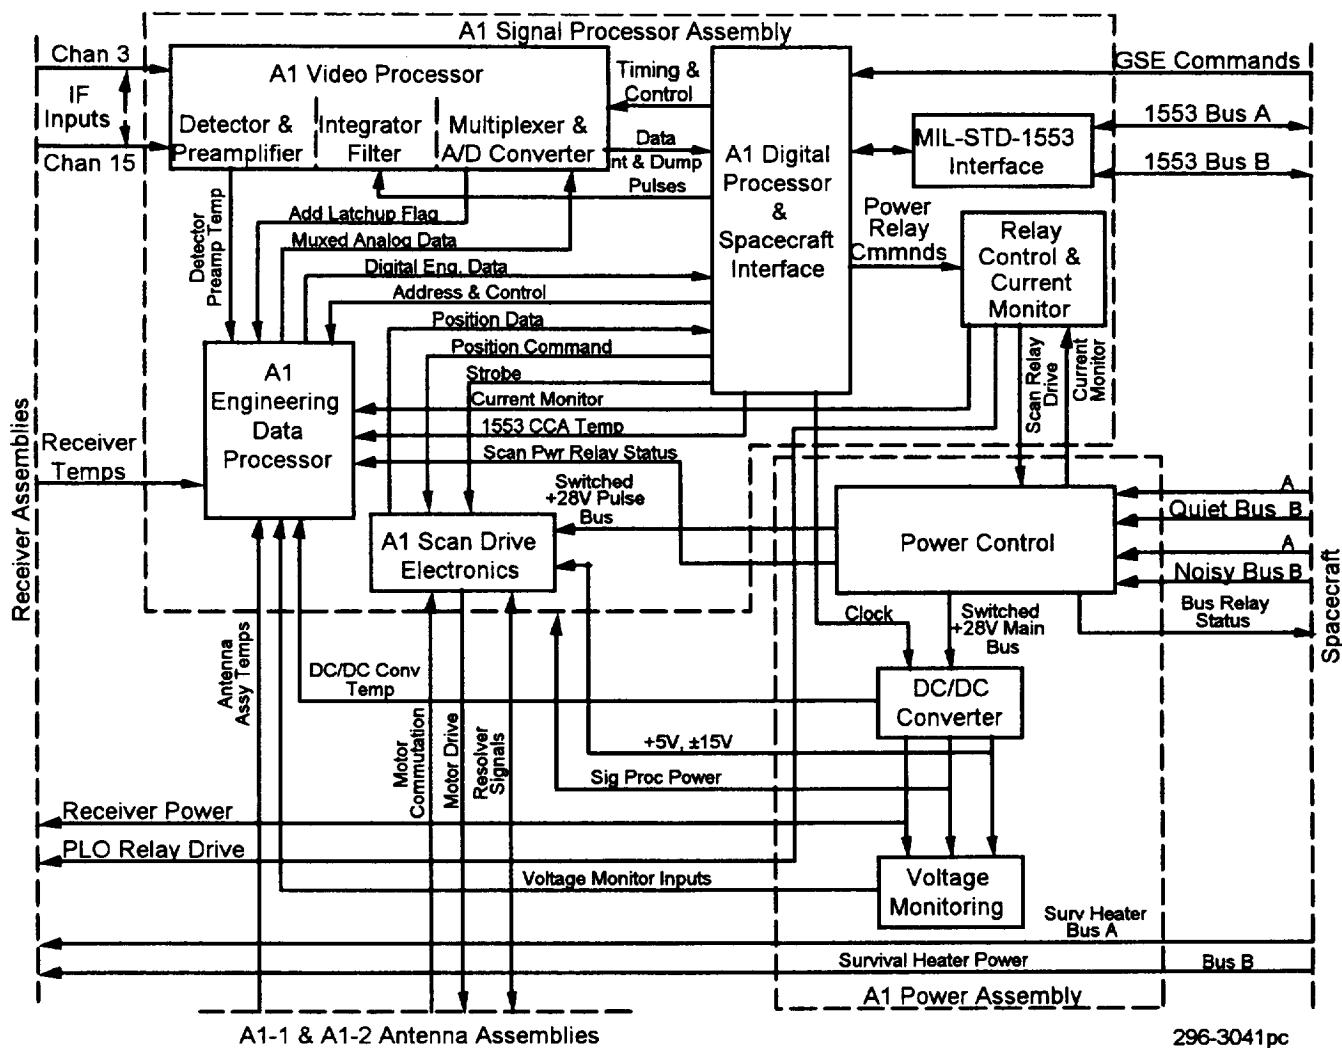


Figure 14 EOS AMSU-A1 Electronics Subassembly

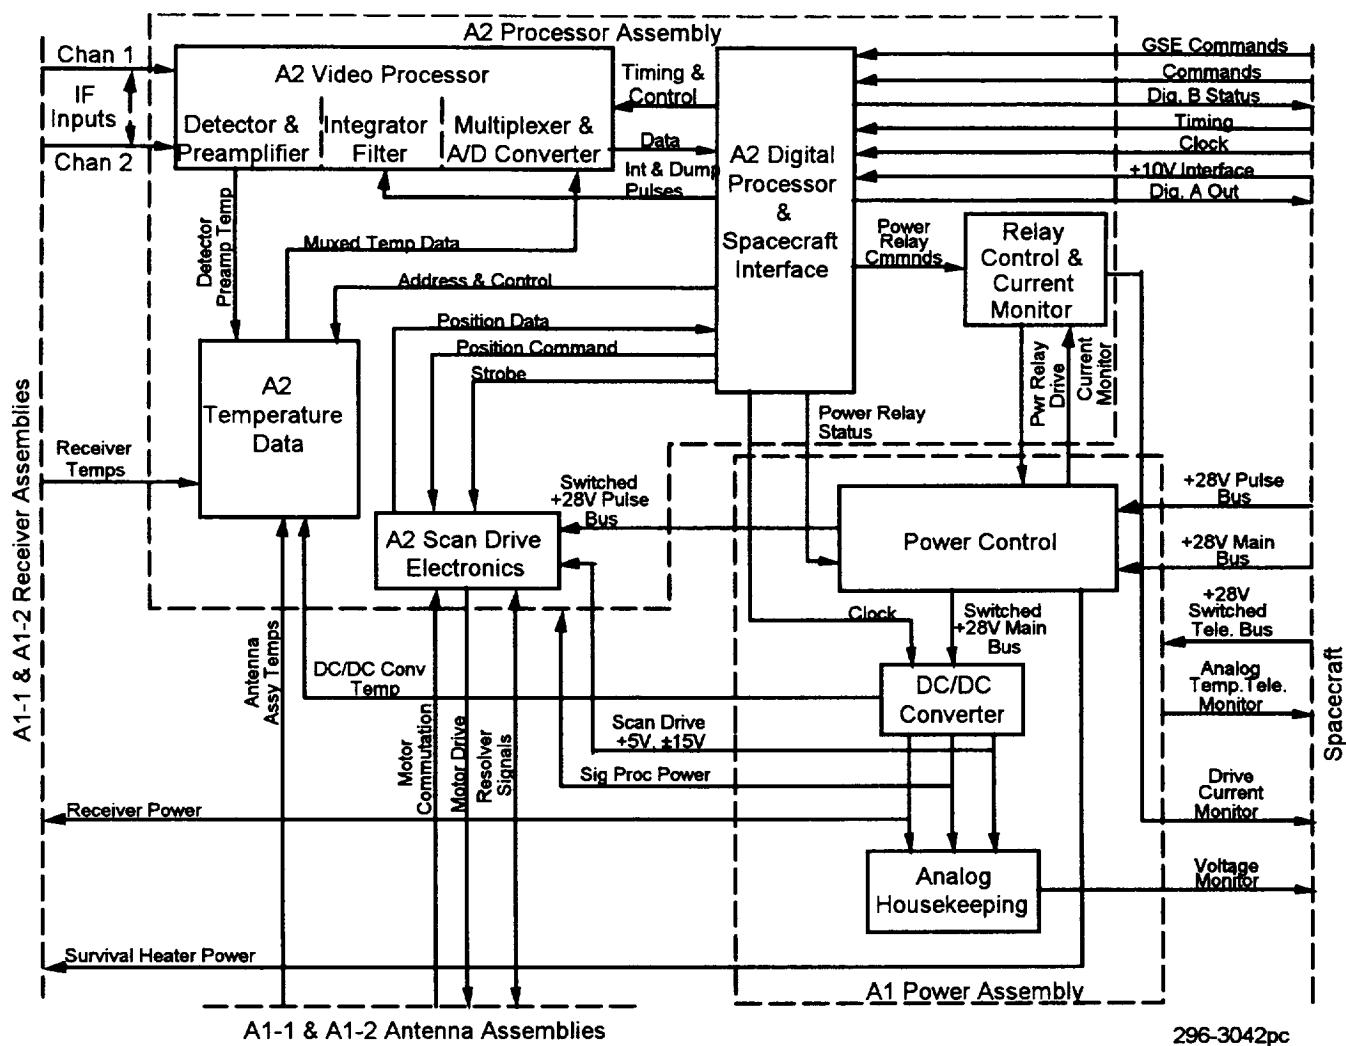


Figure 15 METSAT AMSU-A2 Electronics Subassembly

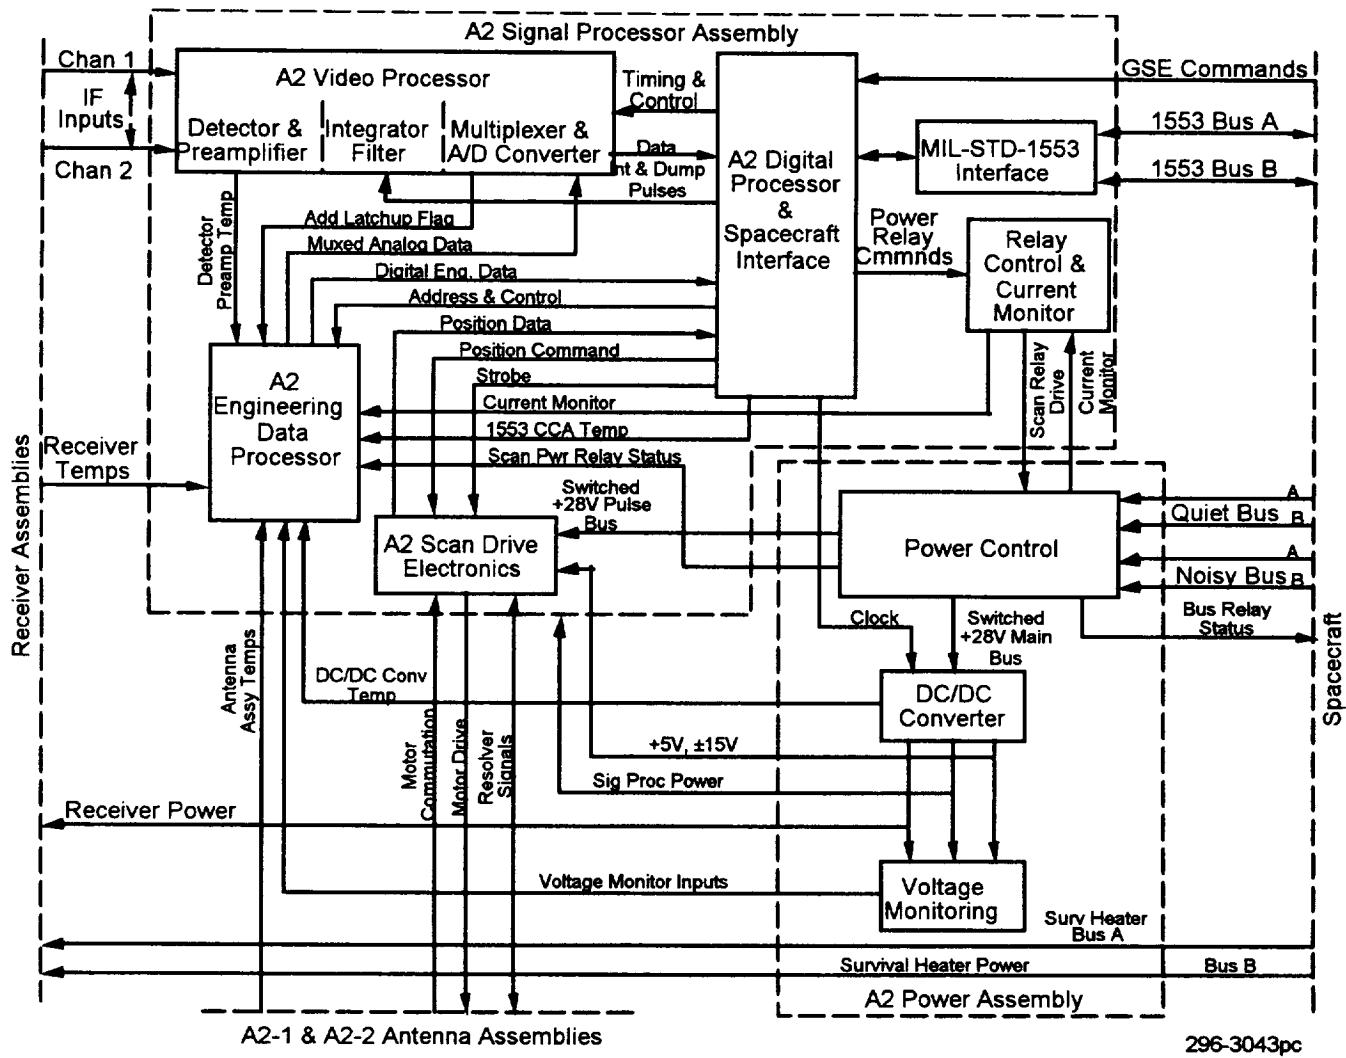


Figure 16 EOS AMSU-A2 Electronics Subassembly

The Signal Processing Assemblies provide video processing of input intermediate frequency (IF) signals, digital processing of the resulting data stream, general control and synchronization of instrument activities, passive analog telemetry circuits and output, scan drive electronics to control antenna position and scan, and data interface control with the METSAT/EOS spacecraft. Each video processor shall provide IF detection, linear preamplification, integration, multiplexing, and digitizing of input signals. The A1 Signal Processing Assembly processes outputs from channels 3 through 15 of the A1 Receiver Subsystem while the A2 Signal Processing Assembly processes outputs channels 1 and 2 of the A2 Receiver Subsystem. Each digital processor provides processor outputs from channels 1 and 2 of the A2 Receiver Subsystem. Each digital processor provides overall control of module operation, receiving commands from the spacecraft and formatting and sending data and status signals, generating timing signals, and providing timing and control signals to and receiving position data from the scan drive electronics. The scan drive electronics converts digital scan control signals to analog motor drive voltages and digitizes antenna resolver output data. Analog circuitry is provided to allow temperature, current, and voltage monitoring of critical instrument elements.

The Power Distribution Assemblies provide distribution and switching of primary spacecraft power to the module subsystems and DC/DC converters in various required operational modes, and a power return and grounding scheme in accordance with METSAT/EOS AMSU-A requirements. The Power Distribution Assemblies also provide distribution and return of the secondary power outputs generated by the DC/DC converters.

7.1.2.2 Subsystem Interface Definition

The Electronics Subsystem functional interface is as follows:

Inputs from Receiver Subsystem

IF attenuator signal outputs from each receiver channel connect via semirigid coaxial connectors to the video processing electronics of the Signal Processing Assemblies.

Temperature sensors and diagnostic sensors connect via electrical connectors from each receiver shelf to the Signal Processing Assemblies.

Inputs from Antenna Subsystem

Motor commutation signals from the hall effect sensors mounted on each motor assembly connect via electrical connectors from each Antenna Subassembly to the scan drive electronics of the Signal Processing Assemblies.

Resolver analog position signals connect via electrical connectors from each Antenna Subassembly to the scan drive electronics of the Signal Processing Assemblies.

Temperature sensors connect via electrical connectors from critical antenna components to the temperature conditioning electronics of the Signal Processing Assemblies.

Outputs to Receiver Subsystem

Voltages from the Power Distribution Assembly of the Electronics Subsystem connect via electrical connectors to power each receiver shelf.

PLO relay drive signal from the Relay Control and Current Monitor electronics connect via electrical connector to the Receiver Subsystem.

Survival Heater power passes from the spacecraft to the survival heaters located on each receiver shelf. The Electronics Subsystem has no control over the Survival Heater Bus.

Outputs to Antenna Subsystem

Motor drive signals from the scan drive electronics connect via electrical connectors to move each motor in the Antenna Subsystem.

Resolver drive signals from the scan drive electronics connect via electrical connectors to each resolver in the Antenna Subsystem.

7.1.3 Antenna Subsystem

7.1.3.1 Antenna Subsystem Description

The AMSU-A Antenna Subsystem is composed of the functional antenna elements, the antenna scan drive motors, the antenna position resolvers, the warm load calibration sources, momentum compensator (METSAT A2 only), and the machined structural housings required to support and align the antenna elements and to mount other elements of AMSU-A.

The A1 and A2 Antenna Subassemblies are shown in block diagram form in Figures 17 and 18 respectively.

7.1.3.2 Subsystem Interface Description

The Antenna Subsystem functional interface is as follows:

Inputs

Each reflector collects and focuses microwave radiation into its corresponding feedhorn.

Motor drive signals from the Signal Processing Assembly of the Electronics Subsystem connects via electrical connector on each antenna subassembly.

Resolver drive signals from the Signal Processing Assembly of the Electronics Subsystem connect via electrical connector on each antenna subassembly.

Outputs

Microwave output signals are provided from the multiplexers (or diplexer) to the corresponding Receiver subsystem channel via waveguide connection.

Motor hall effect sensors connect via electrical connectors to the Signal Processing Assembly of the Electronics Subsystem.

Resolver position analog signals connect via electrical connectors to the Signal Processing Assembly of the Electronics Subsystem.

Temperature sensors in the warm calibration load and on other components connect via electrical connectors to the Signal Processing Assembly of the Electronics Subsystem.


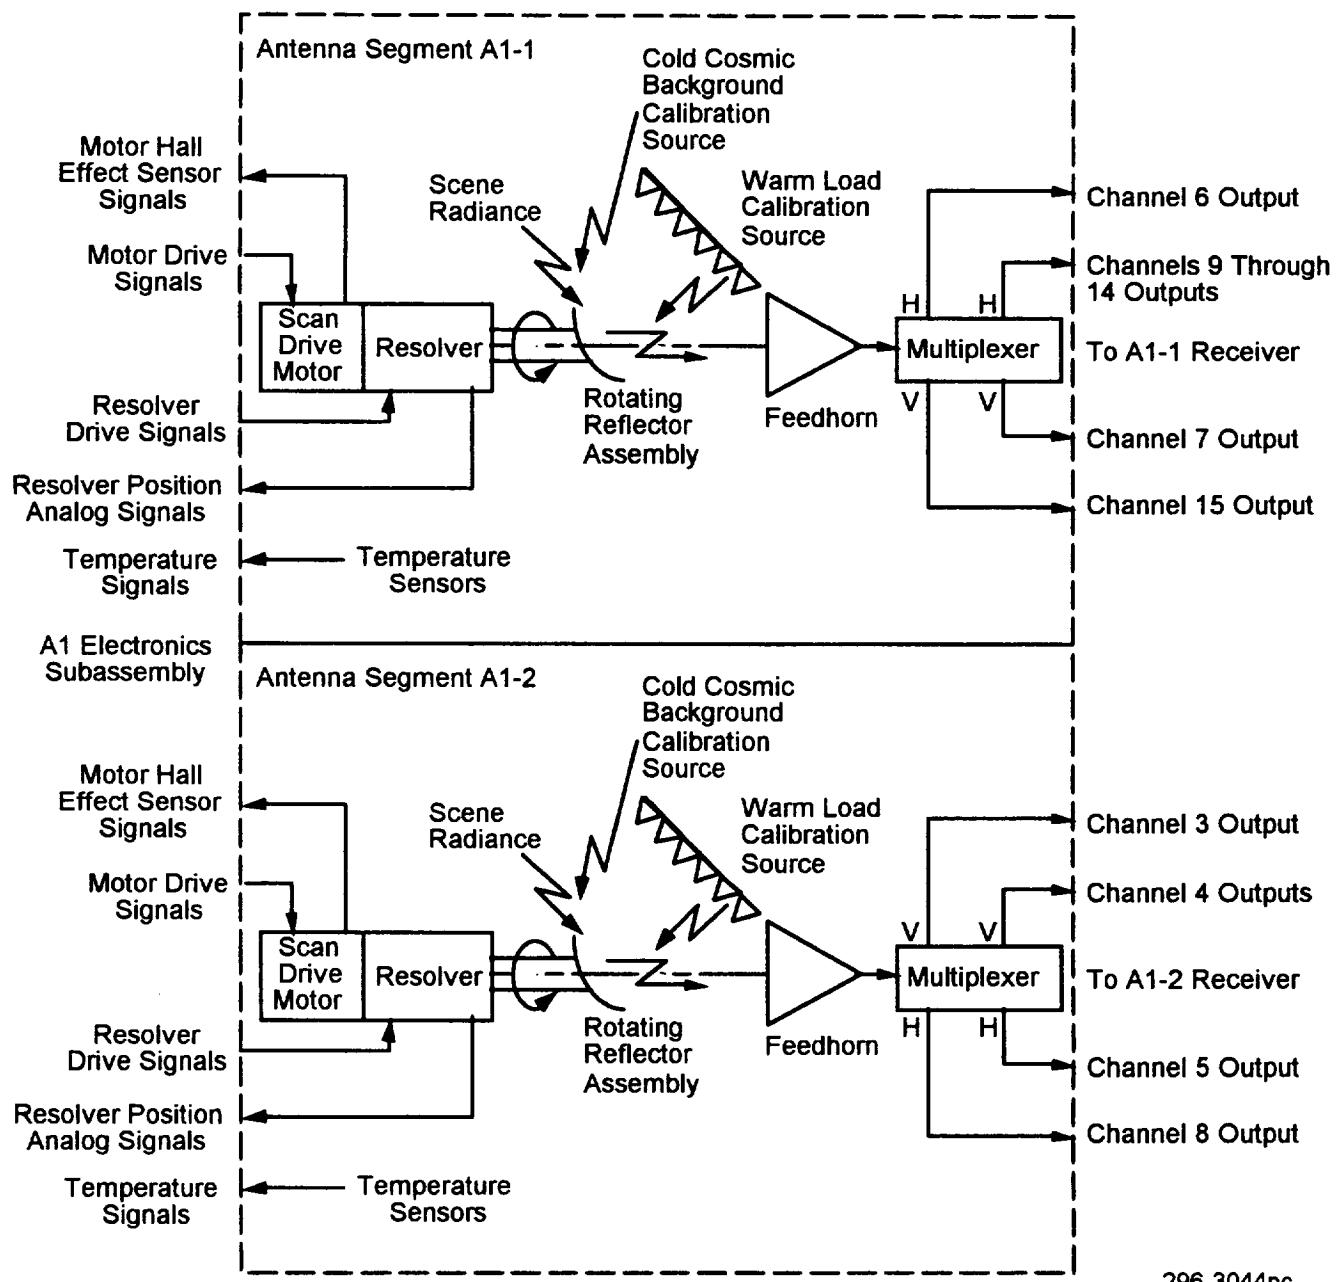


Figure 17 AMSU-A1 Antenna Functional Block Diagram

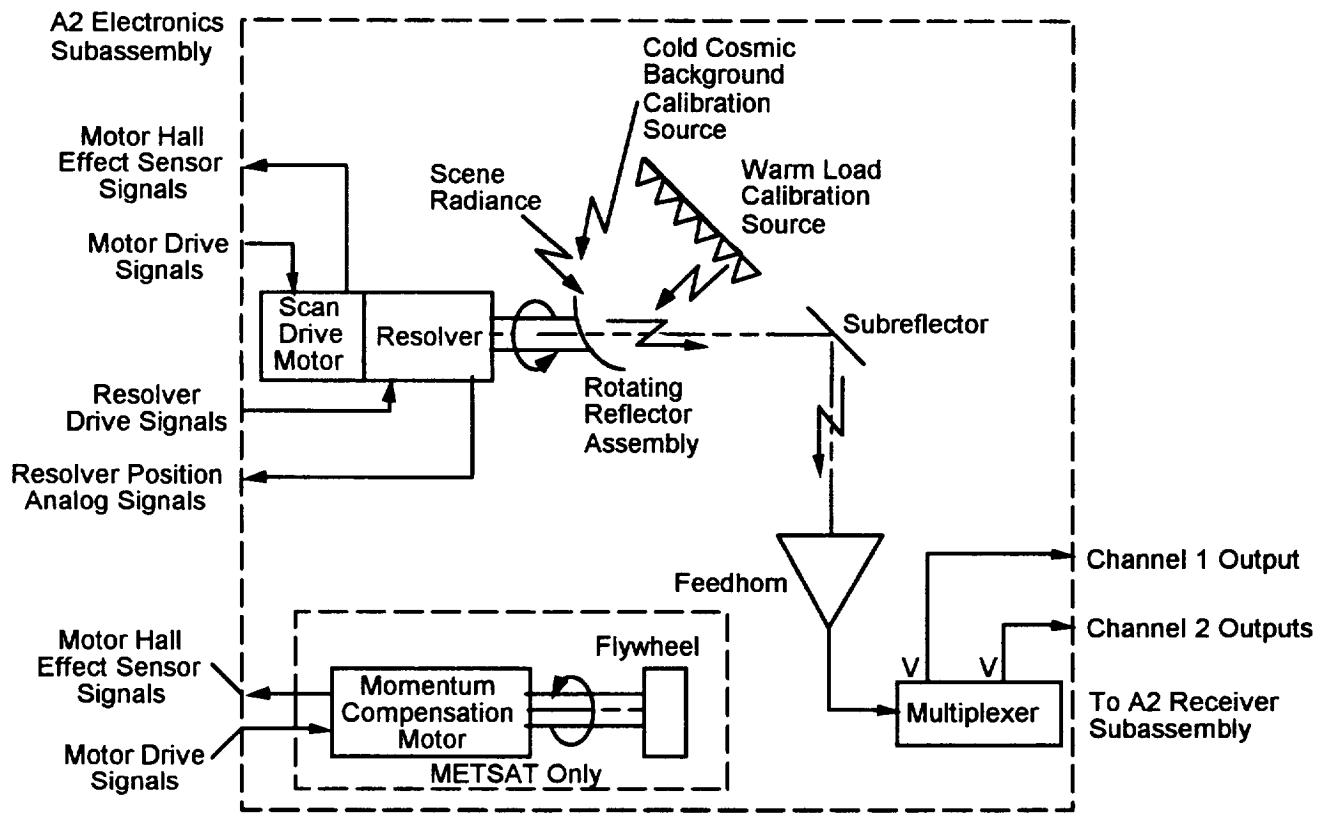

296-3045pc

Figure 18 AMSU-A2 Antenna Functional Block Diagram

7.2 AMSU-A Functional Description for the EOS Instrument

7.2.1 Antenna Functions

The cross-track scanning of the Earth scene is accomplished in a stepped fashion with a dwell of 165 msec for AMSU-A1 and 158 msec for AMSU-A2 at each of the 30 Earth-viewing angles, and a dwell of 330-ms for AMSU-A1 and 316-ms for AMSU-A2 at the cold and warm calibration angles. Scanning of the antenna is accomplished in a rapid-step fashion. A complete rotation of the antenna is accomplished in 8 seconds. During each rotation of the AMSU-A antennas, the AMSU-A modules are calibrated with a cold reference by a view of the 3 K cosmic background radiation and a warm reference by a view of a target at a nominal 300 K temperature.

The antenna assembly is rotated using brushless DC torque motors with precision duplex ball bearing sets. The motors use brushless resolvers for position indication.

Each antenna subassembly is configured with a shrouded parabolic reflector assembly that feeds a wideband corrugated conical horn to provide a symmetrical beam and high beam efficiency. A closed path calibration system provides a completely shrouded path to the calibration target that eliminates extraneous signals.

7.2.2 *Receiver Functions*

Within the electronics subassembly are the radiometer receiver and the signal processor. To maximize the system temperature sensitivity, each receiver is a total power, superheterodyne configuration that uses either a dielectric resonator oscillator (DRO), phase-locked oscillator (PLO), or Gunn diode oscillator (GDO).

The mixers, in conjunction with the local oscillators, down convert the incoming radio frequencies (RF) at the antenna to intermediate frequencies (IF). Predetection gain and passband characteristics are achieved by IF amplifiers and the bandpass filters. Channel center frequency stabilization is provided by highly stable LO. A PLO which is referenced to the harmonic of a crystal oscillator provides the frequency stability required in Channels 9 through 14.

The gain of the IF amplifiers is selected to provide an optimum power level for the square-law detectors. Symmetric passbands for Channels 11 through 14 are established in the MHz frequency region to generate the identical RF signal spectra. The dual-summed surface acoustic wave (SAW) filters provide a $\sqrt{2}$ sensitivity improvement in these channels. The SAW filters provide sharp skirts and required center frequency stability. The square-law detectors convert receiver output power to a dc current equivalent of brightness temperature.

7.2.3 *Data Processing - Multiplexing Functions*

From square law detector outputs, processor subsystems provide radiometric temperature, thermometric temperature, and housekeeping data to the spacecraft system; the subsystems also provide command processing and control timing for all periodic functions of the instruments.

DC video amplifiers amplify low-level detector signals to levels sufficient for subsequent processing. Video amplifiers are contained in shielded enclosures along with the square law detectors. Following video amplification, an offset voltage is added to obtain placement of the system transfer characteristic at the desired position within the range of the A/D converter. The integrate-and-dump (I&D) filters integrate video signals during each beam dwell period (165 ms for A1, 158 ms for A2), hold the integrated levels during digitization, and dump to zero prior to the next beam dwell period. Brightness temperature isolation between scene stations is provided by resetting the filters.

A 16-bit A/D converter digitizes all scene, calibration, and instrument thermometric temperatures for eventual serial readout to the spacecraft. Inputs to the A/D converter are selected by the analog multiplexers, controlled by a microcomputer. During scene and calibration periods, multiplexers switch to I&D filter outputs. Between calibration periods, the multiplexer switches to platinum resistance thermister (PRT) voltages.

The A/D converter digitizes I&D filter outputs during hold intervals and PRT voltages between calibration periods. The microcomputer sequentially transfers data from the A/D converter to the spacecraft.

The A/D converter range accommodates long-term channel gain variations and the resolution provides digitization noise components within system ΔT budgets.

7.2.4 *Temperature Monitoring*

Thermometric temperatures of microwave components and other critical AMSU-A items are provided by precision PRT sensors and calibrated conditioning circuits. Conditioned PRT voltages are digitized and read out to the spacecraft along with radiometric temperature data.

7.2.5 Central Processing Unit (CPU) and Control (Microcomputer)

All processing, clock, command, and telemetry functions of the AMSU-A are controlled within the signal processing section of the electronic subassembly by a space-qualified, radiation-hardened microprocessor.

The digital processor consists of microprocessor-based circuits for data control, frame timing, and reflector interface control.

By means of address and data busses, the microprocessor controls all data operations within the radiometer processing subsystem. During the scene segment of each reflector scan, digitized scene radiometric temperature data of Channels 3 through 15 in the A1 module, Channels 1 and 2 in the A2 module, and antenna position data are processed by the microcomputer. The microcomputer consists of five circuit card assemblies (CCA): (1) CPU, (2) memory, (3) scan control, (4) timing control generation (TCG), (5) MIL-STD-1553 interface. A description of these CCA is provided in Table II. In processing instrument data, the CPU, through the TCG, commands the analog MUX. This converts parallel analog data into a serial stream for conversion to digital format by the A/D converter. The digital data are sent back to the TCG which transfers them to the microprocessor data bus. The CPU routes the data to the MIL-STD-1553 interface where two successive frames are stored in first in, first out (FIFO) memory and random access memory (RAM). The spacecraft can extract the data from the RAM asynchronously.

To control the antenna, the CPU gets position data from the memory and routes a position command through the scan control latch in the motor circuit(s). A strobe signal from the TCG transfers the position data to a digital comparator where digitized resolver position data subtracted from it. The difference signal (the position error) is converted into analog form and drives the motor to the new position.

The microprocessor and other complementary metal oxide semiconductor (CMOS) logic except for the MIL-STD-1553 interface microcircuit operates from +5 Vdc to minimize power consumption, and has response sufficient to complete all data control requirements with considerable time margin. The MIL-STD-1553 microcircuit uses both +5 Vdc and -15 Vdc.

7.2.6 Clock and Command

The analog multiplexer input selection, integrate, hold, and dump intervals, and digitization and reflector stepping functions are controlled by the microcomputer. The CPU operates from an internally generated clock pulse of 1.248 MHz. The DC/DC converter is synchronized to this frequency.

An 8-second pulse provided by the spacecraft via the MIL-STD-1553 bus initiates each scan cycle. Circuits on the MIL-STD-1553 interface CCA extract these data and supply them to the CPU.

Since Channels 9 through 14 of the AMSU-A1 unit use a phase locked oscillator (PLO) with a redundancy; a command is available to select the redundancy to be used. Two scanner power commands independently control power to the AMSU-A1 scan subsystems. The AMSU-A2 scan subsystem also has a commanded power input.

The precise position of the reflector during cold calibration (i.e. when it is staring into cold space) is also controllable. Four discrete calibration positions are available by setting two command bits high or low.

7.2.7 *Test Points and Telemetry*

The EOS/AMSU-A instrument provides test points and analog telemetry outputs. The analog multiplexer inputs and the A/D converter analog input are resistor-buffered and brought out to a test connector to aid in troubleshooting. Analog telemetry (engineering data) provides analogs of supply voltages, bus currents, and temperatures. Digital engineering data include instrument mode, scan power and PLO power relay status, PLO lock status, and A/D converter latchup indicator. These data are multiplexed once per scan, and output on the MIL-STD-1553 interface.

7.2.8 *Temperature Monitoring*

Twelve resistor temperature sensor networks on AMSU-A1, and six on AMSU-A2, input to the spacecraft the passive analog telemetry to provide temperature data independent of instrument operational status. Power bus redundancy monitor outputs are also provided to the spacecraft passive analog interface.

7.2.9 *Input Filter, DC/DC Converter, and Relay Control*

From the redundant +28-volt spacecraft quiet power bus, AMSU-A power systems provide regulated voltages to receiver and radiometer processor subsystems. Redundant reflector scanning motors operate from the +28-volt noisy power bus.

Power on/off control is not provided by the AMSU-A modules; switching between the bus redundancies is automatically performed by relay circuits in the instrument.


A single DC/DC converter in each unit provides receiver and radiometer processor voltages isolated from the +28-volt bus. The DC/DC converter is synchronized to the 1.248 MHz CPU clock. The DC/DC converter provides regulated output of +15 volts, -15 volts, +8 volts, +5 volts, and +10 volts. The mixer/IF amplifiers share a common +10-volt output. A common +8-volt output supplies receiver IF amplifier power. ±15 V outputs supply power to video amplifiers and other analog circuitry of the radiometer processor. The +5-volt output is utilized for the data processing functions of the radiometer processor subsystem. Additional isolated ±15 V and +5V supplies are provided for the scan drive subsystem. The PLO on AMSU-A1 also has independent ± 15 V supplies.

In the absence of the clock signal, the converter will run asynchronously. Input diodes protect the converter from polarity reversal damage. DC/DC converter output voltage regulation is maintained for main power bus input voltages of +24 to +35 volts. Above +40 volts, the converter will shut down.

Scan motors operate from the noisy +28-volt bus. Power to the scan motors is controlled by means of latching relays controlled by the scanner power command.

7.3 Description of METSAT/EOS Unique Functions/Hardware



The major differences between METSAT and EOS AMSU-A instruments are the Power Interfaces and Signal Interfaces with the spacecraft. As shown in Figure 19 the EOS power interface has been improved to take advantage of the spacecraft "quiet" 28 volt supply bus. The "quiet" bus reduces instrument internal noise generation and improved producibility and "safe-to-mate" capability. To implement the power interface improvement required a change in the METSAT power relay and housekeeping circuit card assembly, thus creating a power control and monitoring circuit card assembly for the EOS instrument. The new EOS power control and monitoring circuit card assembly has automatic input power sense and select functions. As shown in Figure 20, the EOS signal interface compared to METSAT has been changed to take advantage of the spacecraft MIL-STD-1553 data bus interface and elimination of the external 1.248 MHz clock interface. This change deleted the METSAT spacecraft interface circuit card assemblies from the EOS design and replaced them with a MIL-STD-1553 interface circuit card assembly.

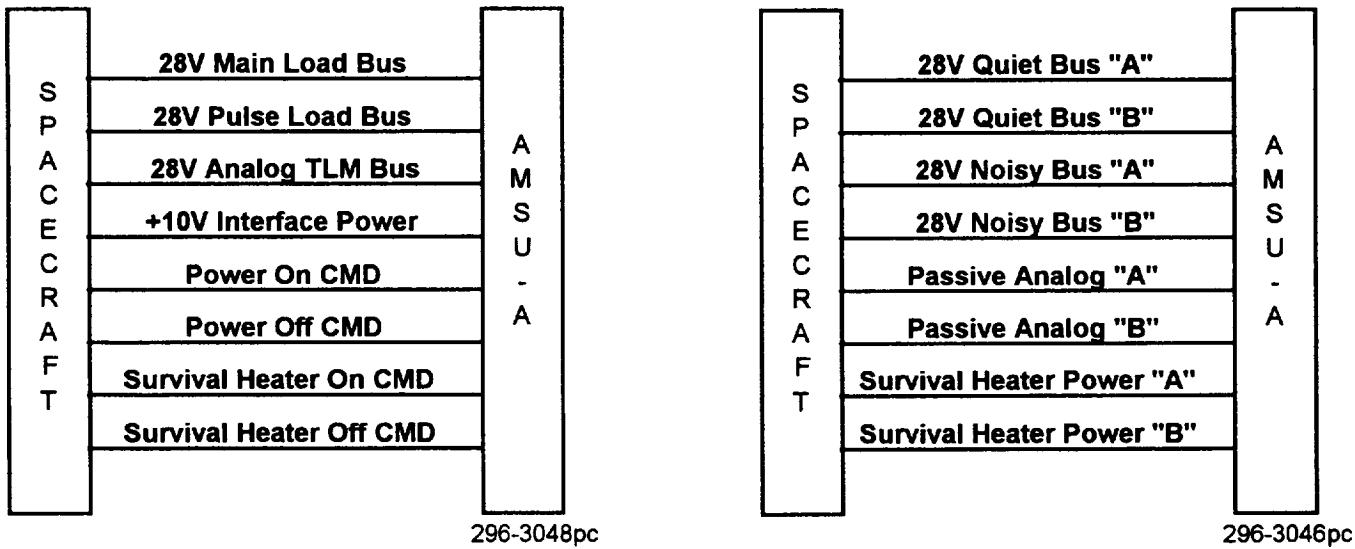

Power Interface for METSAT

Power Interface for EOS

Figure 19 Power Interface Differences

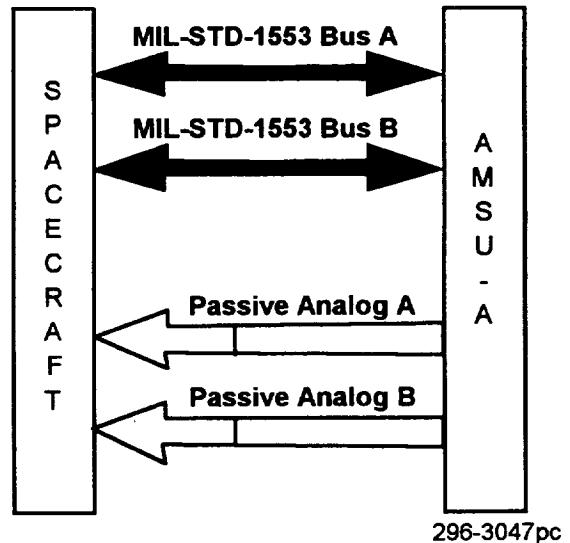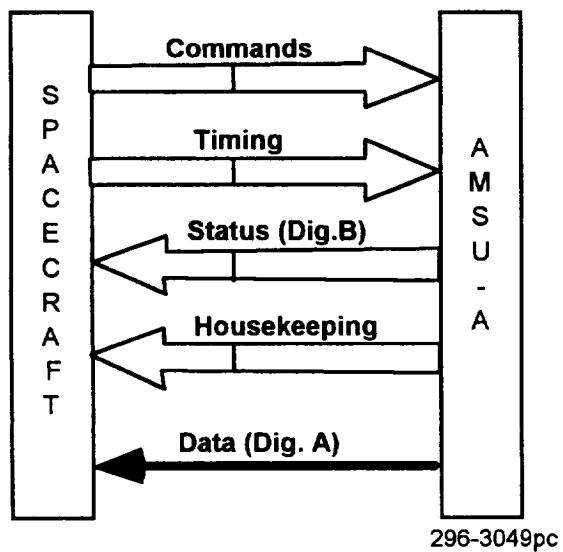

Signal Interface for METSAT

Signal Interface for EOS

Figure 20 Signal Interface Differences

Section 8

ABBREVIATIONS/ACRONYMS

A/D	Analog/Digital
Amp	Amplifier
AMSU	Advanced Microwave Sounding Unit
Attn	Attenuator
BPF	Bandpass Filter
Calib	Calibration
CCA	Circuit Card Assembly
CMOS	cOMPLEMENTARY Metal Oxide Semiconductor
CPU	Central Processing Unit
DET	Detector
EOS	Earth Observing System
FIFO	First In, First Out
GFSC	Goddard Space Flight Center
IF	Intermediate Frequency
ISO	Isolator
I&D	Integrate and Dump
LO	Local Oscillator
METSAT	Meteorological Satellites
MUX	Multiplexer
PLO	Phase-Locked Oscillator
PRT	Platinum Resistance Thermistor
RAM	Random Access Memory
R/D	Resolver/Digital Converter
SAW	Surface Acoustic Wave
TCG	Timing Control Generator
Typ	Typical

APPENDIX A
METSAT/EOS
RELIABILITY PREDICTIONS

Section	Description	Page Number
A1	Module A1 Predictions (METSAT/EOS)	A-2
A2	Module A2 Predictions (METSAT/EOS)	A-63

**APPENDIX A
SECTION A1
METSAT/EOS
AMSU-A MODULE A1
RELIABILITY PREDICTIONS**

Table	Description	Page Number
A1AS	Antenna Subsystem (METSAT/EOS)	A-3
A1RS	Receiver Subsystem (METSAT/EOS)	A-4
A1ES-METSAT	Electronic Subsystem (METSAT)	A-27
A1ES - EOS	Electronic Subsystem (EOS)	A-33

**Table A1AS METSAT/EOS Module A1
Antenna Subsystem**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Antenna Assembly	1356403-1	1	0.75206	0.75206	Table A1AS-1
Multiplexer	1331546-1	1	0.38243	0.38243	AE-24689B
Multiplexer	1331507-1	1	0.38243	0.38243	AE-24689B

Total METSAT/EOS λ = 1.51692

**Table A1AS-1 METSAT/EOS Module A1
Antenna Assembly P/N 1356403-1**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Drive Assy, Reflector	1333640-1	2	0.36703	0.73406	Table A2AS-1-1
Calibration Source and PRTS	1331380-1	2	0.008	0.016	Table A2AS-1
Feedhorn Assembly A1-2	1331361-1	1	0.001	0.001	Aerojet Report 8897-1
Feedhorn Assembly A1-1	1331410-1	1	0.001	0.001	Aerojet Report 8897-1

Total λ = 0.75206

**Table A1RS METSAT/EOS Module A1
Receiver Subsystem**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Common Receiver Elements					
Thermofoil Heater	1337640-3	2	1.7E-6	3.4E-6	NPRD-91
Connector	311P409-4P-B-12	1	0.0005	0.0005	Eng Estimate
Thermostatic Switch	1337651-1	2	0.00013	0.00026	NPRD-91
Connector	AS8381-04- (G04NA)	1	0.0005	0.0005	Eng Estimate
Connector	AS8381-04- F04NA	1	0.0005	0.0005	Eng Estimate
Channel 6 Receiver Elements					
Isolator	1336680-4	1	0.0114	0.0114	AE-26025B
54.4 GHz DRO	1336610-6	1	0.0260	0.0260	AE-24682D
Waveguide Attenuator	1331508-4	1	0.00761	0.00761	AE-26110
Mixer/IF Amplifier	1331562-16	1	0.1923	0.1923	Spacek Labs
Bandpass Filter (10-200 MHz)	1331559-2	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Channel 7 Receiver Elements					
Isolator	1356680-5	1	0.0114	0.0114	AE-26025B
54.94 GHz DRO	1336610-7	1	0.0260	0.0260	AE-24682D
Waveguide Attenuator	1331509-5	1	0.00761	0.00761	AE-26110
Mixer/IF Amplifier	1331562-17	1	0.1923	0.1923	Spacek Labs
Bandpass Filter (10-200 MHz)	1331529-2	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Channel 15 Receiver Elements					
Isolator	1356680-8	1	0.0114	0.0114	AE-26025B
89.0 GHz DRO	1336610-10	1	0.1213	0.1213	AE-24682D
Waveguide Attenuator	1331509-9	1	0.00761	0.00761	AE-26110
Mixer/IF Amplifier	1331562-20	1	0.1923	0.1923	Spacek Labs
Bandpass Filter (500-11500 MHz)	1331559-1	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channels 9-14 Common Elements					
Isolator	1356680-7	1	0.0114	0.0114	AE-26025B
Phase-Locked Oscillator Assy (Redundant)		1	0.0131	0.0131	Table A1RS-1
Waveguide Attenuator	1331510-1	1	0.00761	0.00761	AE-24868
Mixer/IF Amplifier	1331562-19	1	0.2125	0.2125	Spacek Labs
Power Divider, 3-Way	1356669-1	1	0.53649	0.53649	AE-24867-2

Continued

**Table A1RS METSAT/EOS Module A1 (Cont.)
Receiver Subsystem**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Receiver Channel 9					
IF Amplifier	1331579-9	1	0.0731	0.0731	AE-24684C
Bandpass Filter	1331559-4	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channel 10					
IF Amplifier	1331579-9	1	0.0731	0.0731	AE-24684C
Bandpass Filter	1331559-7	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channels 11-14 Common Elements					
IF Amplifier	1331579-7	1	0.007184	0.007184	AE-24684C
4-Way Power Divider	1356670	1	0.53649	0.53649	AE-24867-3
Receiver Channel 11					
SAW Filter	1331576-1	1	0.25988	0.25988	Phonon
IF Amplifier	1331579-10	1	0.1754	0.1754	AE-24684C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channel 12					
SAW Filter	1331576-2	1	0.25988	0.25988	Phonon
IF Amplifier	1331579-11	1	0.1808	0.1808	AE-24684C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channel 13					
SAW Filter	1331576-3	1	0.25988	0.25988	Phonon
IF Amplifier	1331579-12	1	0.1700	0.1700	AE-24684C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channel 14					
SAW Filter	1331576-4	1	0.25988	0.25988	Phonon
IF Amplifier	1331579-13	1	0.2001	0.2001	AE-24684C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Common Elements, Receiver Assembly, A1-2 (P/O 1356409-1)					
Thermofoil Heater	1337640-3	2	1.7E-6	3.4E-6	MPRD-9S
Thermostatic Switch	1337651-1	2	0.00013	0.00026	NPRD-91
Connectors	AS8381-04-F04NA	1	0.0005	0.0005	Eng Estimate
Connectors	311P409-1P-B-12	1	0.0005	0.0005	Eng Estimate
Connectors	AS8381-04-D04NA	1	0.0005	0.0005	Eng Estimate

(Continued)

Table A1RS METSAT/EOS Module A1 (Cont.)
Receiver Subsystem

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Receiver Channel 3					
Isolator	1356680-1	1	0.0114	0.0114	AE-26025B
Waveguide Attenuator	1331509-1	1	0.0076	0.0076	AE-26110
50.3 GHz DRO	1336610-3	1	0.0260	0.0260	AE-24682D
Mixer/IF Amplifier	1331562-13	1	0.1923	0.1923	Spacek Labs
IF Bandpass Filter	1331559-3	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channel 4					
Isolator	1356680-2	1	0.0114	0.0114	AE-26025B
Waveguide Attenuator	1331509-2	1	0.0076	0.0076	AE-26110
Stable Oscillator (52.8 GHz)	1336610-4	1	0.0260	0.0260	AE-24682D
Mixer/IF Amplifier	1331562-14	1	0.1923	0.1923	Spacek Labs
IF Bandpass Filter	1331559-2	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channel 5					
Isolator	1356680-3	1	0.0114	0.0114	AE-26025B
Waveguide Attenuator	1331509-3	1	0.0076	0.0076	AE-26110
53.956 GHz DRO	1336610-5	1	0.0260	0.0260	AE-24682D
Mixer/IF Amplifier	1331562-15	1	0.1923	0.1923	Spacek Labs
IF Bandpass Filter	1331559-5	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1
Receiver Channel 8					
Isolator	1356680-6	1	0.0114	0.0114	AE-26025B
Waveguide Attenuator	1331509-6	1	0.0076	0.0076	AE-26110
55.5 GHz DRO	1336610-8	1	0.0260	0.0260	AE-24682D
Mixer/IF Amplifier	1331559-4	1	0.1923	0.1923	Spacek Labs
IF Bandpass Filter	1331559-2	1	0.0381	0.0381	AE-24687C
IF Attenuator	1331516-X	1	0.0114	0.0114	AE-24868
RF Cable Connectors	SMA Type	3 pair	0.003	0.009	Aerojet Report 8897-1

Total A1RS-METSAT/EOS $\lambda = 5.6318$

TABLE A1RS-1
Standby Redundancy Calculation for the Hybrid Tee/PLO System

The PLO/Hybrid Tee subsystem operates in a standby redundant arrangement which connects the standby PLO Assembly to the Mixer/IF amplifier used for Channels 9 through 14. The system life X may be represented as the sum of the subsystem lives, $X = X_1 + X_2$.

$$F(x) = 1 - \sum \frac{e^{-\lambda x} (\lambda x)^k}{k!}$$

The probability that the system will operate at least x hours is denoted by $R(x)$, the reliability function for the PLO assembly alone is:

$$\begin{aligned} R(x) &= 1 - F(x) \\ &= \sum_{k=0}^{\infty} \frac{e^{-\lambda x} (\lambda x)^k}{k!} \\ &= e^{-\lambda x} (1 + \lambda x) \\ &= e^{-[0.7014 \times 10^{-6} (26,280)]} [1 + 0.7014 \times 10^{-6} (26,280)] \\ &= 0.9998 \end{aligned}$$

the reliability function for the Switching Relay is:

$$\begin{aligned} R(x) &= e^{-\lambda x} (1 + \lambda x) \\ &= e^{-[0.00313 \times 10^{-6} (26,280)]} \\ &= 0.9998 \end{aligned}$$

Combining the failure rates, we get:

$$\begin{aligned} R_{PLO}R_{RELAY} &= 0.99992(0.9998) \\ &= 0.9998 \end{aligned}$$

for the redundant PLO/Hybrid Tee system.

Which results in a PLO/Hybrid Tee System failure rate (λ) of:

$$\begin{aligned} \lambda_{SYS} &= \frac{-\ln(R_{SYS})}{t} \\ &= \frac{-\ln(0.9998)}{26,280 \text{ hrs}} \\ &= 9.43 \times 10^{-3} \text{ failures per million hours.} \end{aligned}$$

TABLE A1RS.1 (Cont.)

		Environment: SF		Temperature: 30°C	
Part Number	Description	Ref/Qty	Failure Rate	Reliability	Source
1348351-1	VCGDO/Harmonic Mixer	1	0.02374	0.99938	
1348400-1	DRO Assembly	1	0.24687	--	
1348420-1	Regulator CCA	1	0.04580	--	
1348500-1	PLL Assembly	1	0.19664	--	
1348325-1	TCXO	1	0.07410	0.99805	FEI Report
M39016/35-006	Relay, Latching, 4PDT	1	0.00313		
					Source
1348430-1	Cable Assembly, RF	1	0.00564	Mil-217F	
1348430-2	Cable Assembly, RF	1	0.00564		
1348430-3	Cable Assembly, RF	1	0.00564		
1348435-1	Cable Assembly, RF	1	0.00564		
1348435-2	Cable Assembly, RF	1	0.00564		
1348435-3	Cable Assembly, RF	1	0.00564	Mil-217F	
					Source
1007-7985-00	Connector	1	0.02500	0.025	NPRD-91
M28861/06-002SB	Feedthru	6	0.00321	0.0005	Mil-217
1084-1100-02	Connector	1	0.02500	0.025	NPRD-91
RER60F10R0R	Resistor, 10-ohm, 5W	1	0.02722	0.02722	Mil-217

Total Failure Rate: 0.7045

PLOXLS
03/13/1996

TABLE A1RS-1 (Cont.)

		DRO CCA	Qty/Ref	Failure Rate	% Assembly
1348410-1		Loop Amplifier CCA	1	0.14727	59.65
1348440-1		573 MHZ Amplifier CCA	1	0.01158	4.69
1348450-1		Feedthru	1	0.03749	15.19
M23861/06-002SB		Jack, Connector	1	0.00054	0.22
1052-3121-00		Connector	1	0.025	10.13
4052-0000-00			1	0.025	10.13

Assembly Failure Rate: 0.2469

Part Number: 1348400

DRO Assembly

TABLE A1RS-1 (Cont.)

Diodes, High Frequency (Microwave Detector)			Failure Rate	λ_b	π_T	π_A	π_R	π_Q	π_E
Part Number	Ref/Qty	Description	0.00079	0.0025	1.26	1.0	1.0	0.5	0.50
MV3110-26	CR1	Varactor	0.00079	0.027	1.34	1.0	1.0	0.5	0.50
MSPD1012-E50	CR2	Sampling Phase Detector	0.00905	0.027	1.34	1.0	1.0	0.5	0.50
Transistors, High Frequency, Bipolar	Ref/Qty	Description	Failure Rate	λ_b	π_T	π_R	π_S	π_Q	π_E
Part Number	Ref/Qty	Description	0.08471	0.18	3.41	1.5	0.4	0.5	0.50
NE243187	Q1	Medium Power Oscillator							
Resistors, Fixed, Film	Ref/Qty	Description	Failure Rate	λ_b	π_R	π_Q	π_E		
Part Number	Ref/Qty	Description	5.00E-05	0.00125	1.0	0.1	0.20		
M55342K02U470DR	2	470, Chip, 50mW	2.50E-05	0.00125	1.0	0.1	0.20		
M55342K02U2E74R	R2	2.74K, Chip, 50mW	2.50E-05	0.00125	1.0	0.1	0.20		
M55342K02U200DR	R3	200, Chip, 50mW	2.50E-05	0.00125	1.0	0.1	0.20		
M55342K02U13D0R	R4	13.0, Chip, 50mW	2.50E-05	0.00125	1.0	0.1	0.20		
CR05S/100	R5-R10	100 ohms	1.50E-04	0.00125	1.0	0.1	0.20		
M55342K02U1E00R	R11,R12	1.00K, Chip, 50mW	5.00E-05	0.00125	1.0	0.1	0.20		
Capacitors, Fixed, Ceramic	Ref/Qty	Description	Failure Rate	λ_b	π_CV	π_Q	π_E		
Part Number	Ref/Qty	Description	1.05E-05	0.00064	0.68	0.03	0.40		
D35NS100J1LA	C1,C2	100pF, 50V	1.02E-05	0.00097	0.88	0.03	0.40		
M123A10BPA102KS	C3	1000F, 50V, Est. Rel.							
Interconnection Assemblies with PTHs	Ref/Qty	Description	Failure Rate	λ_b	π_C	π_E	π_Q	π_E	π_Q
Part Number	Ref/Qty	Description	0.00238	1.7E-05	1.0	1	0.50	0	N2
1348411-1	1	Printed Wiring Board							20
Miscellaneous, Isolator (<100W)	Ref/Qty	Description	Failure Rate	λ_b	π_C	π_E	π_Q	π_E	π_Q
Part Number	Ref/Qty	Description	0.05	Constant	0.10	0.50	0	0	0
F96101/6875	Iso	Isolator, Microwave							

Report 9831C
March 1996

TABLE AIRS-1 (Cont.)

Diodes, High Frequency (Microwave D)						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>App</u>	<u>Junct.</u>	<u>θ_{jc}</u>	<u>Actual Power</u>	<u>Rated Power</u>
MV3110-26	CR1	Other	35.00	70	10.0E-6	1
MSPD1012-E50	CR2	Other	37.94	70	0.042	1
						JAN/TXV
						N
						Y
Transistors, High Frequency, Bipolar						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Temp.</u>	<u>θ_{jc}</u>	<u>Actual Power</u>	<u>Rated Power</u>	<u>Quality</u>
NE243187	Q1	87.39	30	0.913	2.75	6.8
					11	16
						JAN/TXV
Resistors, Fixed, Film						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Ohms</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Power</u>	<u>Quality</u>
M55342K02U470DR	2	470	0.050	0.001	0.001	R
M55342K02U2E74R	R2	2740	0.050	0.001	0.001	R
M55342K02U200DR	R3	200	0.050	0.001	0.001	R
M55342K02U13D0R	R4	13	0.050	0.001	0.001	R
CR05S/100	R5,R10	100	0.050	0.001	0.001	R
M55342K02U1E00R	R11,R12	1000	0.050	0.001	0.001	R
Capacitors, Fixed, Ceramic						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Rated Volts</u>	<u>Actual Volts</u>	<u>Rated θ_E</u>	<u>Temp</u>	<u>Quality</u>
D35NS100J1LA	C1,C2	50	2	100	125	S
M123A10BPPB102KS	C3	50	12	1000	125	S
Interconnection Assemblies with PTHs						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Layers</u>	<u>Quality</u>	<u>PTHs-></u>	<u>Wave Solder</u>	<u>Hand Solder</u>
1348411-1	1	2	Mill	PTHs-> 0	0	20
Miscellaneous, Isolator (<100W)						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Spec. Reliability</u>	<u>FR from Rel.</u>			
F96101/6875	Iso	0.9997	0.01142			

TABLE A1RS-1 (Cont.)

<u>Microcircuits, Gate Logic Arrays and Microprocessors</u>		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
OP22	U1	Operational Amplifier
M38510/11202SGC	U2	Voltage Comparator
Diodes, Low Frequency		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
JANTVX1N914	CR1	Switching, Ultrastable
Transistors, Low Frequency, Bipolar		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
JANTXV2N2907A	Q1,Q2	General Purpose Amp/Switch
Resistors, Fixed, Film, Est. Rel.		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M55342K02B2E74R	R1,R2	2.74K, Fixed Film, Chip, 50mW
M55342K02B10E0R	2	10.0K, Fixed Film, Chip, 50mW
M55342K02B100DR	R4	100, Fixed Film, Chip, 50mW
M55342K03B1F00R	R5,R6	1.00M, Fixed Film, Chip, 50mW
M55342K02B31E6R	R7	31.6K, Fixed Film, Chip, 50mW
M55342K02B61E0R	R8	61.0K, Fixed Film, Chip, 50mW
M55342K02B30E1R	R9	30.1K, Fixed Film, Chip, 50mW
M55342K02B39E2R	R10	39.2K, Fixed Film, Chip, 50mW
M55342K02B22E1R	R11,R12	22.1K, Fixed Film, Chip, 50mW
M55342K02B8E06R	R13	8.06K, Fixed Film, Chip, 50mW
M55342K02B13E0R	R14	13.0K, Fixed Film, Chip, 50mW
M55342K02B100ER	R15	100K, Fixed Film, Chip, 50mW
M55342K02B27E4R	R16	27.4K, Fixed Film, Chip, 50mW
M55342K02B165ER	R17-R19	165K, Fixed Film, Chip, 50mW
Capacitors, Fixed, Ceramic, General Purpose		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M123A10BPPB101KS	C1	100 pF, 50V
M123A12BPPB104KS	C2-C7	0.1uF, 50V
M123A10BPPB102KS	C8,C9	1000pF, 50V
M123A10BPPB331KS	C10	330pF, 50V
M123A10BPPB151KS	C11	150pF, 50V

TABLE AIRS-1 (Cont.)

Capacitors, Fixed, Electrolytic, Aluminum			
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	
CWR08KA155JR	C12	1.5uF, 50V	
Interconnection Assemblies with PTHs			
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	
1348442-1	1	Printed Wiring Board	

Assembly Failure Rate: 0.01158

TABLE A1RS-1 (Cont.)

Microcircuits, Gate/Logic Arrays and M						
Part Number	Ref/Qty	Comp.	Tech.	E _A	Junct.	θ _{j/c}
OP22	U1	50	Bipolar	0.65	43.4	70
M38510/11202SGC	U2	50	Bipolar	0.65	49.52	22
						8
						8
Diodes, Low Frequency	Ref/Qty	Context	Type/ Appl.	Rated Voltage	Junct.	θ _{j/c}
Part Number	Ref/Qty	Metal	S _W		Actual Temp.	*CW
JANTVX1N914	CR1				35.003	10
Transistors, Low Frequency, Bipolar	θ _{jc}	Junct.	Rated Power	Actual Power	Rated Voltage	App. (Lin/Sw)
Part Number	Ref/Qty	(°C/W)	Temp.	Power	Applied	
JANTXV2N2907A	Q1,Q2	70	35.21	1.8	0.003	2
Resistors, Fixed, Film, Est. Rel.	Ref/Qty	Ohms	Rated Power	Actual Power	Quality	
Part Number	Ref/Qty	R1,R2	0.050	0.025	R	
M55342K02B2E74R	2	10000	0.050	0.025	R	
M55342K02B10E0R	R4	100	0.050	0.025	R	
M55342K02B100DR	R5,R6	1000000	0.050	0.025	R	
M55342K03B1F00R	R7	31600	0.050	0.025	R	
M55342K02B31E6R	R8	61000	0.050	0.025	R	
M55342K02B61E0R	R9	30100	0.050	0.025	R	
M55342K02B30E1R	R10	39200	0.050	0.025	R	
M55342K02B39E2R	R11,R12	22100	0.050	0.025	R	
M55342K02B22E1R	R13	8060	0.050	0.025	R	
M55342K02B8E06R	R14	13000	0.050	0.025	R	
M55342K02B13E0R	R15	100000	0.050	0.025	R	
M55342K02B100ER	R16	27400	0.050	0.025	R	
M55342K02B2TE4R	R17-R19	165000	0.050	0.025	R	
Capacitors, Fixed, Ceramic, General P	Ref/Qty	pF	Rated Temp.	Actual Volts	Quality	
Part Number	Ref/Qty	C1	100	125	S	
M123A10BPPB101KS	C2-C7	100000	125	50	S	
M123A12BPPB104KS	C8-C9	1000	125	50	S	
M123A10BPPB102KS	C10	330	125	50	S	
M123A10BPPB331KS	C11	150	125	50	S	
M123A10BPPB151KS						

TABLE A1RS-1 (Cont.)

Capacitors, Fixed, Electrolytic, Alumin			<u>Rated</u>	<u>Actual</u>	<u>Rated</u>	<u>Temp</u>	<u>Quality</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Volts</u>	<u>µF</u>	<u>Volts</u>	<u>Temp</u>	<u>R</u>	<u>Quality</u>
CWR08KA155JR	C12	50	15	1.5	125		

Interconnection Assemblies with PTHs							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Planes</u>	<u>Quality</u>	<u>Wave Solder</u>	<u>PTHs-></u>	<u>0</u>	<u>Hand Solder</u>
	<u>1</u>	<u>2</u>	<u>Mil</u>				
1348442-1							

TABLE AIRS-1 (Cont.)

Diodes, Low Frequency	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_T</u>	<u>π_S</u>	<u>π_C</u>	<u>π_Q</u>	<u>π_E</u>
JANTXV1N752A	CR1	5.6V at 20mA	0.00087	0.002	1.24	1	1	0.7	0.5
Transistors, Low Frequency, Bipolar	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_T</u>	<u>π_A</u>	<u>π_R</u>	<u>π_S</u>	<u>π_Q</u>
JANTXV2N2222A	Q1	Si NPN	0.00013	0.00074	1.28	1.5	1.24	0.21	0.7
Transistors, High Frequency, Bipolar	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_T</u>	<u>π_R</u>	<u>π_S</u>	<u>π_Q</u>	<u>π_E</u>
AT-42010	Q2	Medium Power	0.03420	0.18	3.18	0.828	0.29	0.5	0.5
Resistors, Fixed, Film, Est. Rel.	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_R</u>	<u>π_Q</u>	<u>π_E</u>		
M55342K02B1E20R	R1	1.20K, Chip, 50mW	2.50E-05	0.001251	1	0.1	0.2		
M55342K02B475DR	R2	475, Chip, 50mW	2.50E-05	0.001251	1	0.1	0.2		
M55342K02B200DR	R3	200, Chip, 50mW	2.50E-05	0.001251	1	0.1	0.2		
Capacitors, Fixed, Ceramic	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_{CV}</u>	<u>π_Q</u>	<u>π_E</u>		
M123A10BPPB102KS	C1-C5	1000pF, 50V	0.00024	0.003616	0.88	0.03	0.5		
M123A12BPPB104KS	C7	0.1uF, 50V	0.00008	0.003616	1.45	0.03	0.5		
Capacitors, Fixed, Electrolytic, Aluminum	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_{CV}</u>	<u>π_Q</u>	<u>π_E</u>		
CVVR06KC685JR	C6	6.8uF, 50V	0.00045	0.018672	0.48	0.1	0.5		
Coils, Radio Frequency	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_C</u>	<u>π_Q</u>	<u>π_E</u>		
M83446/10-14	L1	Chip, Fixed, 0.120uH	6.65E-05	0.00044	1	0.3	0.50		
Interconnection Assemblies with PTHs	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_C</u>	<u>π_Q</u>	<u>π_E</u>		
1348452-1	1	Printed Wiring Board	0.00238	1.7E-05	1.01	1	0.5	0	20
Assembly Failure Rate:	<u>0.03749</u>								

TABLE AIRS-1 (Cont.)

Diodes, Low Frequency	<u>Ref/Qty</u>	<u>Contact</u>	<u>Type/App</u>	<u>Voltage</u>	<u>Rated</u>	<u>Applied</u>	<u>Junct.</u>	<u>θ_{JC}</u>	<u>Actual</u>	<u>Rated</u>	<u>Case</u>
JANTXV1N752A	CR1	Metal	Zener	n/a	n/a	n/a	Temp.	*C/W	Watts	Watts	DO-35
Transistors, Low Frequency, Bipolar	<u>Ref/Qty</u>	<u>Junct.</u>	<u>θ_{JC}</u>	<u>Actual</u>	<u>Rated</u>	<u>Vce</u>	<u>Vceo</u>	<u>Case</u>	<u>Quality</u>		
JANTXV2N2222A	Q1	35.7	70	0.01	1.8	1	2				JANTXV
Transistors, High Frequency, Bipolar	<u>Ref/Qty</u>	<u>Junct.</u>	<u>θ_{JC}</u>	<u>Actual</u>	<u>Rated</u>	<u>Freq.</u>	<u>Vce</u>	<u>Vceo</u>	<u>Case</u>	<u>Quality</u>	
AT-42010	Q2	83	150	0.32	0.6	0.573	7.2	12			JANTXV
Resistors, Fixed, Film, Est. Rel.	<u>Ref/Qty</u>	<u>Ohms</u>	<u>Rated</u>	<u>Actual</u>							
M55342K02B1E20R	R1	1200	Watts	Watts							Quality
M55342K02B475DR	R2	475	0.050	0.025							R
M55342K02B200DR	R3	200	0.050	0.025							R
Capacitors, Fixed, Ceramic	<u>Ref/Qty</u>	<u>pF</u>	<u>Rated</u>	<u>Actual</u>	<u>Rated</u>	<u>Temp</u>	<u>Temp</u>	<u>Quality</u>			
M123A10BPB102KS	C1-C5	1000	Volts	Volts							
M123A12BPB104KS	C7	100000	50	15	15	125	S				
M123A12BPB104KS	C6	6.8	50	15	15	125	S				
Capacitors, Fixed, Electrolytic, Alumi	<u>Ref/Qty</u>	<u>uF</u>	<u>Rated</u>	<u>Actual</u>	<u>Rated</u>	<u>Temp</u>	<u>Temp</u>	<u>Quality</u>			
CWR06KC6855JR			Volts	Volts							
Coils, Radio Frequency	<u>Ref/Qty</u>	<u>Hot Spot</u>	<u>D_T</u>	<u>Power</u>							
M83446/10-14	L1	30.21	0.194	Loss (W)							
				100.0E-6	P						
Interconnection Assemblies with PTH	<u>Ref/Qty</u>	<u>Planes</u>	<u>Mil</u>	<u>PTHs-></u>	<u>Wave Solder</u>	<u>Hand Solder</u>					
1348452-1	1	2		0	0	20					

TABLE A1RS-1 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M38510/11703BXC	U1	Adjustable Voltage Regulator
M38510/11703BXC	U2	Adjustable Voltage Regulator
M38510/11502BXC	U3	Voltage Regulator, -12V at 0.5A
 Diodes, Low Frequency		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
JANTXV1N3611	CR1-CR5	(Reverse Voltage Protection)
 Resistors, Fixed, Film		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M55342K02B243DR	R1, R2	243, Fixed Film, Chip, 50mW
1348426	R3, R4	Resistor Kit
M55342K02B2E26R	R5	2.26K, Fixed, Film, Chip, 50mW
M55342K02B1E50R	R6	1.50K, Fixed, Film, Chip, 50mW
 Capacitors, Fixed, Ceramic		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M123A12BPPB104KS	C1,C2	0.1pF, 50V
 Capacitors, Fixed, Electrolytic, Aluminum		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
CWR06KC155JR	C3-C6	1.5uF, 50V
CWR06KC685JR	C7-C9	6.8uF, 50V
 Interconnection Assemblies with PTHs		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
1348422-1	1	Printed Wiring Board

Report 9831C
March 1996

Assembly Failure Rate: 0.04580

TABLE A1RS-1 (Cont.)

Microcircuits, Gate/Logic Arrays and Part Number							<u>Ref/Qty</u>	<u>Comp.</u>	<u>Tech.</u>	<u>E_B</u>	<u>Temp.</u>	<u>Watts</u>	<u>*C/W</u>	<u>θ_{jc}</u>	<u>Pins</u>	<u>Years</u>	<u>Mfr</u>	<u>Package</u>	<u>Quality</u>
M38510/111703BXC	U1	24	Linear	0.65	44.6	0.24	40	3	2	Can	S								
M38510/111703BXC	U2	24	Linear	0.65	94.2	1.48	40	3	2	Can	S								
M38510/111502BXC	U3	23	Linear	0.65	70	0.5	70	3	2	Can	S								
Diodes, Low Frequency Part Number							<u>Ref/Qty</u>	<u>Contact</u>	<u>Type/</u>	<u>Rated</u>	<u>Applied</u>	<u>Junct.</u>	<u>Actual</u>	<u>θ_{jc}</u>	<u>Rated</u>	<u>Power</u>	<u>Case</u>	<u>Quality</u>	
JANTXV1N3611	CR1-CR5	Metal	General	Appl	Voltage	Voltage	200	120	35	1E-06	70	2						JANTXV	
Resistors, Fixed, Film Part Number							<u>Ref/Qty</u>	<u>Rated</u>	<u>Actual</u>	<u>Power</u>	<u>Power</u>	<u>Temp</u>	<u>Quality</u>						
M55342K02B243DR	R1, R2	0.050	0.025	R															
1348426	R3, R4	0.050	0.025	R															
M55342K02B2E26R	R5	0.050	0.025	R															
M55342K02B1E50R	R6	0.050	0.025	R															
Capacitors, Fixed, Ceramic Part Number							<u>Ref/Qty</u>	<u>μF</u>	<u>Rated</u>	<u>Actual</u>	<u>Volts</u>	<u>Volts</u>	<u>Temp</u>	<u>Rated</u>	<u>Temp</u>	<u>Quality</u>			
M123A12BPP104KS	C1,C2	100000	50	15	125	S													
Capacitors, Fixed, Electrolytic, Alumi Part Number							<u>Ref/Qty</u>	<u>μF</u>	<u>Rated</u>	<u>Actual</u>	<u>Volts</u>	<u>Volts</u>	<u>Temp</u>	<u>Rated</u>	<u>Temp</u>	<u>Quality</u>			
CWR06KC155JR	C3-C6	1.5	50	15	125	R													
CWR06KC685JR	C7-C9	6.8	50	15	125	R													
Interconnection Assemblies with PTH Part Number							<u>Ref/Qty</u>	<u>Planes</u>	<u>Quality</u>	<u>Wave Solder</u>	<u>PTHs-></u>	<u>0</u>	<u>20</u>	<u>Hand Solder</u>					
1348422-1	1	2	Mil																

TABLE A1RS-1 (Cont.)

PLO.xls
03/13/1996

Part Number	Description	Ref/Qty	Failure Rate	% Assembly
1348370-1	Cable Adapter	1		
1348436-1	Cable Assembly	1	0.000572	2.91
1348440-1	Loop Amplifier CCA	1	0.01158	5.89
1348520-1	PLL CCA	1	0.15113	76.86

Part Number	Description	Ref/Qty	Failure Rate	% Assembly
M28861/06-002SB	Feedthru	6	0.00321	1.63
4056-0000-00	Connector	1	0.02500	12.71

Assembly Failure Rate: 0.1966

Part Number: 1348360

PLL Assembly

Schematic: 1348501

TABLE AIRS-1 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
INA-03170	U1,U2	Si Bipolar MMIC Amplifier
Diodes, Zeners		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
JANTXV1N752A	CR1-CR3	5.6V at 20mA
Diodes, High Frequency (Microwave Detector)		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
MSPD1012-E50	CR2	Sampling Phase Detector
Transistors, High Frequency, Bipolar		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
AT-42010	Q4-Q6	Medium Power
Transistors, Single Bipolar Si NPN		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
JANTXV2N2222A	Q1-Q3	
Resistors, Fixed, Film		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M55342K022U1E21R	R1-R6	1.21K, Fixed Film, Chip, 50mW
M55342K022U121DR	R7,R8	121, Fixed, Film, Chip, 50mW
M55342K022U51D1R	R9,R10	51.1, Fixed, Film, Chip, 50mW
M55342K022U619DR	R11,R12	619, Fixed, Film, Chip, 50mW
M55342K022U10D0R	R13,R14	10.0, Fixed, Film, Chip, 50mW
M55342K02U475DR	R15,R16	475, Fixed, Film, Chip, 50mW
M55342K02U274DR	R17,R18	274, Fixed, Film, Chip, 50mW
M55342K022U24D3R	R19-R22	24.3, Fixed, Film, Chip, 50mW
M55342K022U200DR	R23,R24	200, Fixed, Film, Chip, 50mW
M55342K02U1E50R	R25-R27	1.50K, Fixed, Film, Chip, 50mW
CR05S/100	R28-R31	100 ohms, 50mW
M55342K022U1E00R	R32,R33	1.00K, Fixed, Film, Chip, 50mW

TABLE AIRS-1 (Cont.)

Capacitors, Fixed, Ceramic			<u>Failure Rate</u>	<u>λ_b</u>	<u>π_{CV}</u>	<u>π_Q</u>	<u>π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>					
M123A10BPB102KS	C1-C14	1000pF, 50V	0.00067	0.00362	0.88	0.030	0.50
M123A10BPB104KS	C18-C20	0.1uF, 50V	0.00024	0.00362	1.45	0.030	0.50
D50BG101J1LA	C21-C24	100pF, 50V	0.00015	0.00362	0.68	0.030	0.50
Capacitors, Fixed, Ceramic, Chip			<u>Failure Rate</u>	<u>λ_b</u>	<u>π_{CV}</u>	<u>π_Q</u>	<u>π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>					
CDR12BP100AJMR	C25	100pF, 50V	4.01E-05	0.00078	1.03	0.10	0.50
Capacitors, Electrolytic, Aluminum			<u>Failure Rate</u>	<u>λ_b</u>	<u>π_{CV}</u>	<u>π_Q</u>	<u>π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>					
CWR06KA685JR	C15-C17	6.8uF, 50V	0.00134	0.01867	0.48	0.10	0.50
Coils			<u>Failure Rate</u>	<u>λ_b</u>	<u>π_C</u>	<u>π_Q</u>	<u>π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>					
M83446/10-14	L1-L3	RF, Chip, Fixed, 0.1120uH	0.00020	0.00044	1	0.3	0.50
1348506-1	L4-L7		0.00027	0.00044	1	0.3	0.50
LQN2AR12J04	L8		0.00020	0.00044	1	0.3	1.50
Interconnection Assemblies with PTHs			<u>Failure Rate</u>	<u>λ_b</u>	<u>π_Q</u>	<u>π_E</u>	<u>π_2</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>					
1348502-1	1	Printed Wiring Board	0.02381	1.7E-05	1.0	1	0.50 0
Filters			<u>Failure Rate</u>	<u>λ_b</u>	<u>π_{CV}</u>	<u>π_Q</u>	<u>π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>					
M28861/6B-002SB	FL1-FL4	RFI Feed-Through Capacitor	0.00214	0.00118	0.9	1.0	0.50

Assembly Failure Rate: 0.15113

TABLE A1RRS-1 (Cont.)

Microcircuits, Gate/Logic Arrays		<u>Ref/Qty</u>	<u>Comp</u>	<u>E_A</u>	<u>Junct.</u>	<u>Actual Watts</u>	<u>Rated Watts</u>	<u>θ_{JC}</u>	<u>θ_{CW}</u>	<u>P_{JNS}</u>	<u>Years</u>
<u>Part Number</u>	<u>INA-03170</u>	<u>U1,U2</u>	<u>300</u>	<u>0.65</u>	<u>42.5</u>	<u>0.05</u>	<u>0.2</u>	<u>150</u>	<u>4</u>	<u>>2</u>	
Diodes, Zeners											
<u>Part Number</u>	<u>JANTXV1N752A</u>	<u>Ref/Qty</u>	<u>CR1-CR3</u>	<u>35.42</u>	<u>Junct.</u>	<u>θ_{JC}</u>	<u>Actual Watts</u>	<u>Rated Power</u>	<u>Quality</u>	<u>JANTXV</u>	
Diodes, High Frequency (Microw)											
<u>Part Number</u>	<u>MSPD1012-E50</u>	<u>Ref/Qty</u>	<u>CR2</u>	<u>App Temp.</u>	<u>Junct.</u>	<u>θ_{JC}</u>	<u>Actual Power</u>	<u>Rated Power</u>	<u>Quality</u>	<u>JANTXV</u>	
Transistors, High Frequency, Bip											
<u>Part Number</u>	<u>AT-42010</u>	<u>Ref/Qty</u>	<u>Q4-Q6</u>	<u>Temp.</u>	<u>Junct.</u>	<u>θ_{JC}</u>	<u>Actual Watts</u>	<u>Rated Power</u>	<u>Freq. (GHz)</u>	<u>Vceo</u>	
Transistors, Single Bipolar Si NP											
<u>Part Number</u>	<u>JANTXV2N2222A</u>	<u>Ref/Qty</u>	<u>Q1-Q3</u>	<u>Temp.</u>	<u>Junct.</u>	<u>θ_{JC}</u>	<u>Actual Watts</u>	<u>Rated Power</u>	<u>Applied</u>	<u>Max</u>	<u>Case</u>
Resistors, Fixed, Film											
<u>Part Number</u>		<u>Ref/Qty</u>			<u>Rated Power</u>	<u>Actual Power</u>					
<u>M55342K02U1E21R</u>		<u>R1-R6</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U121DR</u>		<u>R7,R8</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U51D11R</u>		<u>R9,R10</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U619DR</u>		<u>R11,R12</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U10D0R</u>		<u>R13,R14</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U475DR</u>		<u>R15,R16</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U274DR</u>		<u>R17,R18</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U24D3R</u>		<u>R19,R22</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U200DR</u>		<u>R23,R24</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>M55342K02U1E50R</u>		<u>R25,R27</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				
<u>CR05S100</u>		<u>R28,R31</u>			<u>0.05</u>	<u>1E-06</u>	<u>R</u>				
<u>M55342K02U1E00R</u>		<u>R32,R33</u>			<u>0.050</u>	<u>0.025</u>	<u>R</u>				

TABLE A1RS-1 (Cont.)

Capacitors, Fixed, Ceramic		Rated	Actual	Rated
Part Number	Ref/Qty	Volts	Volts	pF
M123A10BPPB102KS	C1-C14	50	15	125
M123A10BPPB104KS	C18-C20	50	15	125
D50BG101J1LA	C21-C24	50	15	125

Capacitors, Fixed, Ceramic, Chip		Rated	Actual	Rated
Part Number	Ref/Qty	Volts	Volts	pF
CDR12BP100AJMR	C25	50	15	100

Capacitors, Electrolytic, Aluminum		Rated	Actual	Rated
Part Number	Ref/Qty	Volts	Volts	uF
CWR06KA685JR	C15-C17	50	15	6.8

Coils		Power	Ref/Qty	Hot Spot	DT	Loss (W)	Type	Quality
Part Number	Ref/Qty							
M83446/10-14	L1-L3	30.21	0.19365	100.0E-6	Fixed	P		
1348506-1	L4-L7	30.21	0.19365	100.0E-6	Fixed	P		
LQN2AR12J04	L8	30.21	0.19365	100.0E-6	Fixed	P		

Interconnection Assemblies with		Planes	Ref/Qty	PTHs >	Wave Solder	Hand Solder
Part Number	Ref/Qty					
1348502-1	1	2		0	200	

TABLE A1RS-1 (Cont.)

Failure Rate Calculations for the PLO Power Relay

$$\lambda_p = \lambda_b \pi_C \pi_L \pi_{CYC} \pi_F \pi_Q \pi_E$$

λ_b =	0.0062	125°C rated at 40°C
π_C =	5.5	(4PDT)
π_L =	1.02	(Resistive load; S=10%)
π_{CYC} =	0.1	(MIL SPEC, <1.0 cyc/hr)
π_F =	6	(0-5A Contact Rating, Magnetic Latching)
π_Q =	0.30	
π_E =	0.5	

$$\lambda_p = 0.0062 (5.5) 1.02 (0.1) 6 (0.30) 0.5$$

$$\lambda_p = 0.00313$$

THIS PAGE INTENTIONALY BLANK

**Table A1ES METSAT Module A1
Electronic Subsystem**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Detector /Preamp Assembly	1331610-1	1	0.24994	0.24994	Table A1ES-EOS-1
Power Relay & Housekeeping Assy	1356969-1	1	0.08324	0.08324	Table A2ES-METSAT-1 equals P/N 1356908-1. Other misc. has no reliability impact.
DC-to-DC Converter Assy	1356010-1	1	0.38243	0.38243	AE-26577
Cables					
Spacecraft Power (W1)	1356428-2	1	0.04015	0.04015	Table A1ES-EOS-2
I/O Interface Power (W2)	1357146-1	1	0.08909	0.08909	Table A1ES-METSAT-1
Scan Drive (W3)	1356941-1	1	0.10757	0.10757	Table A1ES-METSAT-2
I/O Interface (W4)	1356942-1	1	0.19545	0.19545	Table A1ES-METSAT-3
I/O Temp (W5)	1356943-1	1	0.25041	0.25041	Table A1ES-METSAT-4
Signal Processing Assembly (1331670-7)					
Temp Sensor "A" CCA	1338421	1	0.03278	0.03278	Table A2ES-EOS-7
Temp Sensor "B" CCA (Not Mission Critical)	1331682-1	2	N/A		
Temp Sensor Analog MUX CCA	1331688	1	0.00914	0.00914	Table A2ES-EOS-8
Analog MUX and A/D Converter CCA	1356418	1	0.03684	0.03684	Table A2ES-EOS-9
Integrate and Dump Filter CCA	1338424	4	0.01269	0.05076	Table A2ES-EOS-10
Spacecraft Interface #1	1331144	1	0.08345	0.08345	Table A2ES-METSAT-7
Spacecraft Interface #2	1331147	1	0.05416	0.05416	Table A2ES-METSAT-8
Parallel to Serial Converter	1331150	1	0.06697	0.06697	Table A2ES-METSAT-9
Timing and Control CCA	1331135	1	0.02884	0.02884	Table A2ES-EOS-12
CPU CCA	1356413	1	0.02334	0.02334	Table A2ES-EOS-13
Memory CCA	1331126	1	0.01542	0.01542	Table A2ES-EOS-14
Scan Drive CCAs					
Scan Control Interface CCA	1331129	1	0.00731	0.00731	Table A2ES-EOS-15
Relay Driver and Current Monitor CCA	1356911-1	1	0.06183	0.06183	Table A2ES-METSAT-10
Interface/Converter CCA	1331697	2	0.03492	0.06984	Table A2ES-EOS-17
Resolver-Data Isolator CCA	1334972	2	0.01716	0.03432	Table A2ES-EOS-18
R-D Converter/Oscillator CCA	1337739	2	0.08332	0.16664	Table A2ES-EOS-19
Motor Driver CCA	1331694-1	2	0.03864	0.07728	Table A2ES-EOS-20

Total A1ES-METSAT $\lambda = 2.2172$

TABLE A1ES-METSAT-1

WNET/SAT Part Number 1357146

TABLE A1ES-METSAT-2

METSAT Part Number 1356941-1

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Connections/Pins
1	1	1	1337653-3	CCA, I/O Interface	P327	52
2	1	1	1356784-1	Transistor Assy		58
3	1	1	311P409-3P-B-12	Connector, Sub-D	P702	30
4	1	1	311P409-3S-B-12	Connector, Sub-D	P101	19
			311P409-3S-B-12	Connector, Sub-D	P201	19
7	1	1	1337677-1	Connector, Recept, 92-pin	J403	18
		1	1337677-1	Connector, Recept, 92-pin	J404	18
Designation λp				π_b	π_K	π_E
P327	0.00141		0.00057	0.00057	1.0	9.95
	0.0676		0.0026		0.50	0.50
Transistor Assy 0.0180294				(see assembly 1356784 failure rate calculations)		
Connections 0.00406			0.00014	0.50	1.0	
P702	0.00079	0.0039	0.00057 0.00026	1.0	5.60	0.50
				0.50	1.0	0.1
P101	0.00055	0.00247	0.00057 0.00026	1.0	3.86	0.50
				0.50	1.0	0.1
P201	0.00055	0.00247	0.00057 0.00026	1.0	3.86	0.50
				0.50	1.0	0.1
J403	0.00053	0.00234	0.00057 0.00026	1.0	3.71	0.50
				0.50	1.0	0.1
J404	0.00053	<u>0.00234</u>	0.00057 <u>0.00026</u> <u>0.10757</u>	1.0	3.71	0.50
				0.50	1.0	0.1
						0.01397 22
						Crimp

TABLE A1ES-METSAT-2 (Cont)

Transistors, Low Frequency, Bipolar		
Part Number	Ref/Qty	Description
JANS2N3741	Q1-Q3	Power PNP
JANS2N3749	Q4-Q6	Power NPN
JANS2N3741	Q7-Q9 (-1 only)	Power PNP
JANS2N3749	Q10-Q12 (-1 only)	Power NPN

Diodes, Low Frequency		
Part Number	Ref/Qty	Description
AS8301-1N5417-S	CR1-CR6	Fast Switching Rectifier
AS8301-1N5417-S	CR7-CR12 (-1 only)	Fast Switching Rectifier

Transistors, Low Frequency, Bipolar		
Part Number	Ref/Qty	Description
JANS2N3741	Q1-Q3	Power PNP
JANS2N3749	Q4-Q6	Power NPN
JANS2N3741	Q7-Q9 (-1 only)	Power PNP
JANS2N3749	Q10-Q12 (-1 only)	Power NPN

Diodes, Low Frequency		
Part Number	Ref/Qty	Description
AS8301-1N5417-S	CR1-CR6	Fast Switching Rectifier
AS8301-1N5417-S	CR7-CR12 (-1 only)	Fast Switching Rectifier

TABLE A1ES-METSAT-3

METSAT Part Number 1356942

Report 9831C
March 1996

TABLE A1ES-METSAT-4

METSAT Part Number 1356943

Item No.	Qty	Reqd	Part Number	Nomenclature	Active
					Designation Pins
1	1		1337653-4	CCA, I/O Interface	P302 88
2	1		AS8096-37PHR0	Connector, 37 Pin, HF Filter	J6 30
3	1		AS8381-03-F04N	Connector, 37 Pin, 26AWG Wire	P602 25
4	1		AS8381-03-A04N	Connector, 9 Pin, 26AWG Wire	P705 21
5	1		AS8381-03-G04N	Connector, 51 Pin, 26AWG Wire	P601 43
6	1		311P409-2S-B-12	Connector, Sub-D	J101 13
	1		311P409-2S-B-12	Connector, Sub-D	J202 13
Designation λp			λb	πK πP	πE i_{AVG} ΔT AWG
P302 Connector	0.00290	Connections 0.1144	0.00057 0.0026	1.0 20.46 0.50	0.1 0.01397 22
J6 Connector	0.00079	Connections 0.039	0.00057 0.0026 Ground Lug 0.00026	1.0 5.60 0.50 0.50	0.1 0.01397 22
P602 Connector	0.00068	Connections 0.00325	0.00057 0.00026	1.0 4.78 0.50	0.1 0.01397 22
P705 Connector	0.00059	Connections 0.00273	0.00057 0.00026	1.0 4.16 0.50	0.1 0.01397 22
P601 Connector	0.001135749	Connections 0.00559	0.00057 0.00026	1.0 8.01 0.50	0.1 0.01397 22
P102 Connector	0.001135749	Connections 0.00169	0.00057 0.00026	1.0 3.00 0.50	0.1 0.01397 22
P202 Connector	0.001135749	Connections 0.00169	0.00057 0.00026 0.17698	1.0 3.00 0.50	0.1 0.01397 22

**Table A1ES-EOS Module A1
Electronic Subsystem**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Detector /Preamp Assembly	1331610-1	1	0.24994	0.24994	Table A1ES-EOS-1
Power Control/Monitoring Assy	1356760-1	1	0.28827	0.28827	Table A2ES-EOS-2
DC-to-DC Converter	1356010-1	1	0.38243	0.38243	AE-26577
Cables					
Spacecraft Power (W1)	1356428-1	1	0.04015	0.04015	Table A1ES-EOS-2
Power In (W2)	1356427-1	1	0.08909	0.08909	Table A1ES-EOS-3
Scan Drive (W3)	1356424-1	1	0.11464	0.11464	Table A1ES-EOS-4
Clock and PRT (W4)	1356425-1	1	0.09264	0.09264	Table A1ES-EOS-5
Warm Load (W5)	1356426-1	1	0.24649	0.24649	Table A1ES-EOS-6
Signal Processing Assembly (1356412-1)					
Temp Sensor "A" CCA	1338421	1	0.03278	0.03278	Table A2ES-EOS-7
Temp Sensor "B" CCA (Not Mission Critical)	1331682	2	N/A		
Temp Sensor Analog MUX CCA	1331688	1	0.00914	0.00914	Table A2ES-EOS-8
Analog MUX and A/D Converter CCA	1356418	1	0.03684	0.03684	Table A2ES-EOS-9
Integrate and Dump Filter CCA	1338424	4	0.01269	0.05076	Table A2ES-EOS-10
MIL-STD-1553 Interface CCA	1355998	1	0.15342	0.15342	Table A2ES-EOS-11
Timing and Control CCA	1331135	1	0.02884	0.02884	Table A2ES-EOS-12
CPU CCA	1356413	1	0.02334	0.02334	Table A2ES-EOS-13
Memory CCA	1331126	1	0.01542	0.01542	Table A2ES-EOS-14
Scan Drive CCAs					
Scan Control Interface CCA	1331129	1	0.00731	0.00731	Table A2ES-EOS-15
MUX Relay CCA	1356000	1	0.02586	0.02586	Table A2ES-EOS-16
Interface/Converter CCA	1331697	2	0.03492	0.06984	Table A2ES-EOS-17
Resolver-Data Isolator CCA	1334972	2	0.01716	0.03432	Table A2ES-EOS-18
R-D Converter/Oscillator CCA	1337739	2	0.08332	0.16664	Table A2ES-EOS-19
Motor Driver CCA	1331694	2	0.03864	0.07728	Table A2ES-EOS-20

Total A1ES-EOS-2 = 2.2354

TABLE A1ES-EOS-1

Environment: SF Temperature: 30°C

Part Number	Description	Failure Rate	
		Ref/Qty	Unit
1331074-1	CCA, 2-Channel Video Preamp	1	0.0116
1331074-2	CCA, 2-Channel Video Preamp	1	0.0116
1331157	CCA, 3-Channel Video Preamp	3	0.0145
1331577-1	Detector, RF	12	0.0141
1331577-2	Detector, RF	1	0.0176
AS8052-1	Connector	2	0.008
AS8385-55-3007	SMA Connectors	13	0.003
AS8137-2A204	Connector	2	0.008
311P10-2P-C-15	Connecor	2	0.008

A1 Module: 0.25350

TABLE A1ES-EOS-1 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors			<u>Failure Rate</u>	<u>$\frac{\Pi_T}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
<u>Part Number</u>	<u>Ref/Cty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{\Pi_T}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
23149-4	U1	Positive Regulator (LM140H-12)	0.00060	0.22752	0.50	0.25	1.0	0.01
23149-5	U2	Negative Regulator (LM120H-12)	0.00060	0.22751	0.50	0.25	1.0	0.01
23149-3	U3	Reference Diode (LM136A)	0.00058	0.22761	0.50	0.25	1.0	0.01
25012/15-1	U4, U5	Operational Amplifier (LT1007A)	0.00163	0.22763	0.50	0.25	1.0	0.01
M38510/10104SGX	U7, U8	Operational Amplifier (LM108A)	0.00151	0.22751	0.50	0.25	1.0	0.01
Diodes, Low Frequency			<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_T}{\lambda_b}$</u>	<u>$\frac{\Pi_S}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
<u>Part Number</u>	<u>Ref/Cty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_T}{\lambda_b}$</u>	<u>$\frac{\Pi_S}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
JANS1N5615	CR1	Diode	0.00010	0.0038	1.4	0.054	1	0.7
Resistors, Fixed, Composition			<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_R}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
<u>Part Number</u>	<u>Ref/Cty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_R}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
RCR05G103JS	R1	10K, 5%, 0, 0.125W, Est. Rel.	7.50E-06	0.00125	1	0.03	0.2	
RCR05G101JS	R14-R17	100, 5%, 0, 0.125W, Est. Rel.	3.00E-05	0.00125	1	0.03	0.2	
1331073-5 (All)	R8, R10	Resistor Kit	9.03E-06	0.0075	1	0.03	0.2	
1331073-4 (All)	R20, R22	Resistor Kit	9.03E-06	0.0075	1	0.03	0.2	
1331073-9 (-1)	R9, R11	Resistor Kit	9.03E-06	0.0075	1	0.03	0.2	
1331073-6 (-1, -3)	R21, R23	Resistor Kit	9.03E-06	0.0075	1	0.03	0.2	
1331073-10 (-2)	R9	Resistor Kit	4.52E-06	0.0075	1	0.03	0.2	
1331073-9 (-2)	R11	Resistor Kit	4.52E-06	0.0075	1	0.03	0.2	
1331073-7 (-2)	R21	Resistor Kit	4.52E-06	0.0075	1	0.03	0.2	
1331073-6 (-2)	R22	Resistor Kit	4.52E-06	0.0075	1	0.03	0.2	
1331073-6 (-3)	R9, R11	Resistor Kit	9.03E-06	0.0075	1	0.03	0.2	
Resistors, Fixed, Film			<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_R}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
<u>Part Number</u>	<u>Ref/Cty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_R}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
RNC05J1002FS	R2, R3	10K, 1%, 0, 0.1W, Est. Rel.	8.14E-06	0.00068	1	0.03	0.2	
RNC05J4991FS	R5, R6	4.99K, 1%, 0, 0.1W, Est. Rel.	8.14E-06	0.00068	1	0.03	0.2	
Capacitors, Fixed, Ceramic, General Purpose			<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_R}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
<u>Part Number</u>	<u>Ref/Cty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{\lambda_b}{\lambda_b}$</u>	<u>$\frac{\Pi_R}{\lambda_b}$</u>	<u>$\frac{\Pi_Q}{\lambda_b}$</u>	<u>$\frac{\Pi_C}{\lambda_b}$</u>	<u>$\frac{\Pi_E}{\lambda_b}$</u>
M39014/01-1348	C2-C7	Capacitor, Ceramic, ER, 330pF, 200V	3.91E-05	0.0007	0.776	0.03	0.4	
M39014/01-1339	C8	Capacitor, Ceramic, ER, 100pF, 200V	5.71E-06	0.0007	0.68	0.03	0.4	
M39014/02-1350	C9, C10	Capacitor, Ceramic, ER, 0.1uF, 100V	2.45E-05	0.0007	1.455	0.03	0.4	

TABLE A1ES-EOS-1 (Cont.)

Capacitors, Fixed, Electrolytic, Tantalum, Solid			<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>$\frac{\Pi_Q}{\Pi_C}$</u>	<u>$\frac{\Pi_S R}{\Pi_Q}$</u>	<u>$\frac{\Pi_Q}{\Pi_E}$</u>
<u>Part Number</u>	M39003/01-8194	C1	Capacitor, Solid Tant., ER, 1uF, 50V		1.89E-05	0.00476	1	0.33	0.03
Connector, PCB AS8137-1A20Y-0									
<u>Ref/Qty</u>	P1	<u>Description</u>			Failure Rate	<u>λ_b</u>	<u>$\frac{\Pi_K}{\Pi_C}$</u>	<u>$\frac{\Pi_P}{\Pi_Q}$</u>	<u>$\frac{\Pi_E}{\Pi_Q}$</u>
<u>Part Number</u>	1337285-1	C1	Connector, Connector		0.00099	0.00028	1.5	4.619	0.5
Interconnection Assemblies with PTHs									
<u>Part Number</u>	1	<u>Ref/Qty</u>	<u>Description</u>		Failure Rate	<u>λ_b</u>	<u>$\frac{\Pi_C}{\Pi_Q}$</u>	<u>$\frac{\Pi_E}{\Pi_Q}$</u>	<u>$\frac{\Pi_2}{\Pi_1}$</u>
			Printed Wiring Board		0.00321	1.7E-05	1.792	1	0.5
Connections Hand Solder, with Wrapping									
<u>Ref/Qty</u>	32	<u>Ref/Qty</u>	<u>Description</u>		Failure Rate	<u>λ_b</u>	<u>$\frac{\Pi_Q}{\Pi_C}$</u>	<u>$\frac{\Pi_E}{\Pi_Q}$</u>	<u>$\frac{\Pi_2}{\Pi_1}$</u>
			Select-At-Test Resistors		0.00224	0.00014	1	0.5	211
Total Failure Rate (-1):									
(-1):					0.01163				
(-2):					<u>$\frac{0.01163}{0.01163}$</u>				
(-3):					<u>$\frac{0.01166}{0.01166}$</u>				

TABLE A1ES-EOS-1 (Cont.)

RCVR.XLS
03/14/1996

Microcircuits, Gate/Logic Arrays and							Mfr						
Part Number	Ref/Qty	Compl.	Tech.	E _g	Junct.	θ _{jc}	Pins	Years	Packag	Quality			
							(*C/W)						
23149-4	U1	11	Linear	0.65	35.00	0.0001	26	>2	Cer	S			
23149-5	U2	22	Linear	0.65	35.00	0.0001	21	>2	Cer	S			
23149-3	U3	17	Linear	0.65	35.01	0.0001	80	2	Cer	S			
25012/15-1	U4, U5	30	Linear	0.65	35.01	0.0002	45	8	Cer	S			
M38510/10104SGX	U7, U8	29	Linear	0.65	35.00	0.0005	45	7	Cer	S			
Diodes, Low Frequency							Rated	Actual	θ _{jc}	Junct.	Rated	Actual	
Part Number	Ref/Qty	Voltage	Voltage	L/C/W	Temp.	Power	Power	Power	Power	Case	Quality		
JANS1N5615	CR1	75	5	10	35.00	0.383	1.0E-6	DO-3	JANTXV				
Resistors, Fixed, Composition							Rated	Actual					
Part Number	Ref/Qty			Ohms			Power	Power					
RCR05G103JS	R1	10000		0.125			0.0625	0.0625					
RCR05G101JS	R14-R17	100		0.125			0.0625	0.0625					
1331073-5 (AII)	R8, R10	10000		0.125			0.0053	0.0053					
1331073-4 (AII)	R20, R22	10000		0.125			0.0053	0.0053					
1331073-9 (-1)	R9, R11	10000		0.125			0.0053	0.0053					
1331073-6 (-1,-3)	R21, R23	10000		0.125			0.0053	0.0053					
1331073-10 (-2)	R9	10000		0.125			0.0053	0.0053					
1331073-9 (-2)	R11	10000		0.125			0.0053	0.0053					
1331073-7 (-2)	R21	10000		0.125			0.0053	0.0053					
1331073-6 (-2)	R22	10000		0.125			0.0053	0.0053					
1331073-6 (-3)	R9, R11	10000		0.125			0.0053	0.0053					
Resistors, Fixed, Film							Rated	Actual					
Part Number	Ref/Qty			Ohms			Power	Power					
RNC05J1002FS	R2, R3	10000		0.125			0.0053	0.0053					
RNC05J4991FS	R5, R6	4990		0.125			0.0053	0.0053					
Capacitors, Fixed, Ceramic, General							Rated	Actual					
Part Number	Ref/Qty			pF			Voltage	Voltage					
M39014/01-1348	C2-C7	330		85			200	5					
M39014/01-1339	C8	100		85			200	5					
M39014/02-1350	C9, C10	100000		85			100	5					

TABLE A1ES-EOS-1 (Cont.)

RCVR.XLS
03/14/1996

Capacitors, Fixed, Electrolytic, Tantalum		Ref/Qty	uF	Rated Temp.	Rated Voltage	Actual Voltage	Actual Quality
Part Number		C1	1	85	50	5	S
M39003/01-8194							
Connector, PCB	Ref/Qty	Active Pins	Pin Gauge	Avg. Current	Temp. Rise	Quality Mil	Mate / Unmate Per 1000 hours
AS8137-1A20Y-0	P1	24	26	0.1	0.03	0.5	
Interconnection Assemblies with PTHs		Ref/Qty	Layers	Quality	Wave Solder	Hand Solder	
Part Number		1	5	Mil	PTHs >	211	0
1337285-1							
Connections	Ref/Qty						
Hand Solder, with Wrapping	32						

TABLE A1ES-EOS-1 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Π_E</u>	<u>Π_Q</u>	<u>Π_L</u>
23149-4	U1	Positive Regulator (LM140H-12)	0.00089	0.34E-16	0.50	0.25
23149-5	U2	Negative Regulator (LM120H-12)	0.00082	0.316E-24	0.50	0.25
23149-3	U3	Reference Diode (LM136A)	0.00059	0.23E-11	0.50	0.25
M38510/10104SGX	U4-U6	Operational Amplifier (LM108A)	0.00232	0.23E-07	0.50	0.25
25012/15-1	U7-U9	Operational Amplifier (LT1007A)	0.00315	0.32E-14	0.50	0.25
Diodes, Low Frequency						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_T</u>	<u>Π_E</u>
JANSTIN5615	CR1, CR2	Rectifier, Power	3.65E-05	0.069	1.4	0.054
Resistors, Fixed, Composition						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_R</u>	<u>Π_E</u>
RCR05G103JS	R1	Resistor, Film, ER, 10K, 0.125W	4.79E-06	7.99E-04	1	0.03
RCR05G101JS	R14-R19	Resistor, Film, ER, 100, 0.125W	2.60E-05	7.22E-04	1	0.03
Resistors, Fixed, Film						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_R</u>	<u>Π_E</u>
RNC05D1002FS	R2-R4	Resistor, Fixed, Film, ER, 10K, 0.1W	1.30E-05	0.00072	1	0.03
RNC05D4991FS	R5-R7	Resistor, Fixed, Film, ER, 4.99K, 0.1W	1.17E-05	0.00065	1	0.03
RNC05D4991FS	R8, R10, R12	Resistor, Fixed, Film, ER, 4.99K, 0.1W	1.17E-05	0.00065	1	0.03
RNC05D4991FS	R9, R11, R13	Resistor, Fixed, Film, ER, 4.99K, 0.1W	1.17E-05	0.00065	1	0.03
RNC05D4991FS	R20, R22, R24	Resistor, Fixed, Film, ER, 4.99K, 0.1W	1.17E-05	0.00065	1	0.03
RNC05D4991FS	R21, R23, R25	Resistor, Fixed, Film, ER, 4.99K, 0.1W	1.17E-05	0.00065	1	0.03
Capacitors, Fixed, Ceramic, General Purpose						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_CV</u>	<u>Π_Q</u>
M39014/01-1348	C7-C9	Capacitor, Ceramic, ER, 330pF, 200V	1.86E-05	0.00067	0.77E-03	0.4
M39014/02-1350	C10-C15	Capacitor, Ceramic, ER, 0.1uF, 100V	7.16E-05	0.00068	1.45E-03	0.4
M39014/01-1339	C16-C18	Capacitor, Ceramic, ER, 10pF, 200V	1.67E-05	0.00068	0.68	0.03
Capacitors, Fixed, Electrolytic, Tantalum, Solid						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{SR}</u>	<u>Π_Q</u>
M39003/01-8194	C1, C2	Est. Rel., 1uF, 50V	0.00013	0.00667	1	0.33
M39003/01-8194	C3-C6	Est. Rel., 1uF, 50V	0.00023	0.0057	1	0.33

Report 9831C
March 1996

TABLE A1ES-EOS-1 (Cont.)

<u>Connector, PCB</u>	<u>Qty/Ref</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_E</u>
1337748-1	P1	Connector, Receptacle, 92-Contact	0.00243	0.00028	1.5	11.38	0.5
Interconnection Assemblies with PTHs							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>
1337285-1	1	Printed Wiring Board	0.00372	1.7E-05	1.792	1	0.5
Total Failure Rate: <u>0.01452</u>							

TABLE A1ES-EOS-1 (Cont.)

Microcircuits, Gate/Logic Arrays and									
Part Number	Ref/Qty	Comp.	Tech.	E_a	Junct.	Watts	θ_{jc}	Pins	Mfr
Years Package Quality									
23149-4	U1	11	Linear	0.65	40.2	0.2	26	3	>2 Can S
23149-5	U2	22	Linear	0.65	39.2	0.2	21	3	>2 Can S
23149-3	U3	17	Linear	0.65	35.2	0.0025	80	2	>2 Can S
M38510/10104SGX	U4-U6	29	Linear	0.65	35.4	0.008	45	7	>2 Can S
25012/15-1	U7-U9	30	Linear	0.65	39.4	0.098	45	8	>2 Can S
Diodes, Low Frequency									
Part Number	Ref/Qty	Actual	θ_{jc}	Junct.	Rated	Actual	Power	Power	Quality
JANS1N5615	CR1, CR2	25	Voltage	(°C/W)	Temp.	Power	Power	1.00E-06	JANTZV
Resistors, Fixed, Composition									
Part Number	Ref/Qty	Ohms	Power	Actual	Power	Actual	Power	Power	Quality
RCR05G103JS	R1	10000	0.125	0.012	S				
RCR05G101JS	R14-R19	100	0.125	0.00064	S				
Resistors, Fixed, Film									
Part Number	Ref/Qty	Ohms	Power	Actual	Power	Actual	Power	Power	Quality
RNC05D1002FS	R2-R4	10000	0.125	0.012	S				
RNC05D4991FS	R5-R7	4990	0.125	1.0E-6	S				
RNC05D4991FS	R8, R10, R12	4990	0.125	1.0E-6	S				
RNC05D4991FS	R9, R11, R13	4990	0.125	1.0E-6	S				
RNC05D4991FS	R20, R22, R24	4990	0.125	0.0004	S				
RNC05D4991FS	R21, R23, R25	4990	0.125	0.0004	S				
Capacitors, Fixed, Ceramic, General									
Part Number	Ref/Qty	pF	Temp.	Voltage	Rated	Actual	Voltage	Voltage	Quality
M39014/01-1348	C7-C9	330	125	50	5		S		
M39014/02-1350	C10-C15	100000	125	100	12		S		
M39014/01-1339	C16-C18	100	125	100	12		S		
Capacitors, Fixed, Electrolytic, Tant									
Part Number	Ref/Qty	uF	Temp.	Voltage	Rated	Actual	Voltage	Voltage	Quality
M39003/01-8194	C1, C2	1	85	50	15		S		
M39003/01-8194	C3-C6	1	85	50	12		S		

TABLE A1ES-EOS-1 (Cont.)

<u>Connector, PCB</u>	<u>Qty/Ref</u>	<u>Active Pins</u>	<u>Pin Gauge</u>	<u>Avg. Current</u>	<u>Temp. Rise</u>	<u>Quality Mil</u>	<u>Mate / Unmate per 1000 hours</u>
1337748-1	P1	58	26	0.1	0.03	Mil	0.5
Interconnection Assemblies with PTHs							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Layers</u>	<u>Quality</u>	<u>PTHs-></u>	<u>Wave Solder</u>	<u>Hand Solder</u>	
1337285-1	1	5	Mil	PTHS->	244	0	

TABLE A1ES-EOS-1 (Cont.)

RF Detector Failure Rate Prediction

Using the hybrid failure model:

$$\lambda_P = [\Sigma N_C \lambda_C] (1 + 0.2\pi_E) \pi_F \pi_Q \pi_L + 2\lambda_{Conn}$$

λ_P = Total hybrid failure rate

N_C = Number of each particular component

λ_C = Failure rate for each particular component

π_E = Environment factor

π_F = Circuit function factor

π_Q = Quality factor

π_L = Learning factor

λ_{Conn} = Failure rate for the connectors

$\lambda_{Diode} = 0.00259$

$\lambda_{Resistor} = 0.00080$

$\lambda_{Capacitor} = 0.00086$

$\lambda_{Interconn} = 0.00055$

$\lambda_{Conn} = 0.00270$

$\pi_E = 0.5 \quad S_F$

$\pi_{F,1} = 1.2 \quad 10\text{MHz} < f < 1\text{GHz}$

$\pi_{F,2} = 2.6 \quad f > 1\text{GHz}$

$\pi_Q = 0.25 \quad \text{Procured to Class S requirements}$

$\pi_L = 1.0 \quad \geq 2 \text{ year in production.}$

$$\lambda_P = [\Sigma N_C \lambda_C] (1 + 0.2\pi_E) \pi_F \pi_Q \pi_L + 2\lambda_{Conn}$$

$\lambda_{P(1)} = \underline{0.00698} \text{ Failures / } 10^6 \text{ Hours for Part Number 1331577-1} \quad 0.9997$

$\lambda_{P(2)} = \underline{0.00883} \text{ Failures / } 10^6 \text{ Hours for Part Number 1331577-2} \quad 0.9996$

TABLE A1ES-EOS-1 (Cont.)

I. For the Tunnel Diode:

The part operating failure rate model (λ_P), from section 6.2 is:

$$\lambda_P = \lambda_b \pi_T \pi_A \pi_C \pi_Q \pi_E$$

λ_b = Base Failure Rate
= 0.0023 failures/ 10^6 hours

π_T = Temperature Factor

$$= \exp \left[-2100 \left(\frac{1}{T_J + 273} - \frac{1}{298} \right) \right]$$

where: T_J = Junction Temp. = 30.03 °C

$$\pi_T = 1.1$$

π_A = Application Factor = 1.0 "All Other Diodes"

π_R = Power Rating Factor = 1.0 "All Other Diodes"

π_Q = Quality Factor = 1 per Section 5.5

π_E = Environment Factor = 1 per Section 5.5

$$\lambda_P = \underline{0.00259} \text{ Failures}/10^6 \text{ Hours}$$

TABLE A1ES-EOS-1 (Cont.)

II. For the Chip Resistor:

The general model for a hybrid states that chip resistors are considered to contribute insignificantly to the overall hybrid failure rate, and are assumed to have a failure rate of zero. However, since this hybrid consists of a capacitor, a diode and a resistor, the hybrid is considered to consist of mostly passive components and the failure rate for the resistor is derived here.

The part operating failure rate model (λ_P), from section 9.2 is:

$$\lambda_P = \lambda_b \pi_R \pi_Q \pi_E$$

λ_b = Base Failure Rate

$$= 5 \times 10^{-5} \exp\left[3.5\left(\frac{T+273}{398}\right)\right] \exp\left[S\left(\frac{T+273}{273}\right)\right]$$

where: S = Power Stress Ratio = 0.1
T = Operating Temp. = 30 °C

$$\lambda_b = 0.00080 \text{ failures}/10^6 \text{ hours}$$

π_R = Resistance Factor = 1.0 assumed to be less than 100KΩ
 π_Q = Quality Factor = 1 per Section 5.5
 π_E = Environment Factor 1 per Section 5.5

$$\lambda_P = \underline{0.00080} \text{ Failures}/10^6 \text{ Hours}$$

TABLE A1ES-EOS-1 (Cont.)

III. For the Capacitor:

Using a CKR style capacitor as stated in the Advanced Control Components, Inc.
Reliability Prediction RP-1335923. Which is a similar design used on SSMIS.

The part operating failure rate model (λ_P), from section 10.10 is:

$$\lambda_P = \lambda_b \pi_{CV} \pi_Q \pi_E$$

λ_b = Base Failure Rate

$$= 0.0003 \left[\left(\frac{S}{0.3} \right)^3 + 1 \right] \exp \left(-\frac{T + 273}{T_{max} + 273} \right)$$

where: S = Voltage Stress = 0.1

T = Operating Temp. = 30 °C

T_{max} = Rated Temp. = 150 °C

$$\lambda_b = 0.00064 \text{ failures}/10^6 \text{ hours}$$

π_{CV} = Capacitance Factor

$$= 0.59C^{0.12} \quad C = \text{Capacitance in picofarads} = 1000$$

$$\pi_{CV} = 1.35$$

π_Q = Quality Factor = 1 per Section 5.5

π_E = Environment Factor 1 per Section 5.5

$$\lambda_P = 0.00086 \text{ Failures}/10^6 \text{ Hours}$$

TABLE A1ES-EOS-1 (Cont.)

IV. For the Interconnections:

The part operating failure rate model (λ_P), from section 17.1 is:

$$\lambda_P = \lambda_b \pi_Q \pi_E$$

λ_b = Base Failure Rate

λ_b = 0.000069 failures/ 10^6 hours Hand solder, w/o Wrapping

π_Q = Quality Factor = 1 per Section 5.5

π_E = Environment Factor 1 per Section 5.5

$$\lambda_P = 0.000069 \text{ Failures}/10^6 \text{ Hours}$$

$$N = 8$$

$$N\lambda_P = \underline{0.000552} \text{ Failures}/10^6 \text{ Hours}$$

TABLE A1ES-EOS-1 (Cont.)

V. For the Connectors:

The part operating failure rate model (λ_P), from section 15.1 is:

$$\lambda_P = \lambda_b \pi_K \pi_P \pi_E$$

λ_b = Base Failure Rate (for insert material C)

$$= 0.190 \exp \left[\left(\frac{-1298.0}{T_o + 273} \right) + \left(\frac{T_o + 273}{373} \right)^{4.25} \right]$$

where: T_o = Int. Contact Temp. = 30 °C Insignificant temperature rise

$$\lambda_b = 0.0040 \text{ failures}/10^6 \text{ hours}$$

π_K = Mate/Unmate Factor = 1.0 less than 0.05 per 1000 hours

π_P = Active Pins Factor 2 Active Pins per Section 15.1

$$= \exp \left[\left(\frac{N - 1}{10} \right)^{0.51064} \right]$$

$$\pi_P = 1.36$$

π_E = Environment Factor 0.50 per Section 5.5

$$\lambda_P = 0.00270 \text{ Failures}/10^6 \text{ Hours}$$

TABLE A1ES-EOS-1 (Cont.)
Estimated Active Device Junction Temperature (T_J)

$$T_J = T_C + \Theta_{JC} P_D$$

where:

T_C = Case Temperature

Θ_{JC} = Junction-to-Case Thermal Resistance

$$\Theta_{JC} = \frac{\sum_{i=1}^n \left(\frac{1}{K_i} \right) L_i}{A}$$

Layer	Figure 1 Feature	$1/K_i(L_i)$ (in ² °C/W)	estimate
Germanium Chip	A	0.0045	
Conductive Epoxy	B	0.023	
Solder Substrate Attachment	E	0.0023	
$\Sigma(1/K_i)L_i =$			0.0298

A = Die Area

$$= [0.00278 (\text{No. Die Active Wire Terminals}) + 0.0417]^2$$

$$A = 0.0022 \text{ in}^2$$

$$\Theta_{JC} = 13.3 \text{ °C/W}$$

P_D = Power Dissipation

$$P_D = 0.002 \text{ watts}$$

$$T_J = T_C + \Theta_{JC} P_D$$

$$T_J = 30.03 \text{ °C}$$

TABLE AIES.EOS-2

Part Number 1356428-1 and -2

TABLE A1ES-EOS-3

EOS Part Number 1356427-1						
Item	Qty	No.	Reqd	Part Number	Nomenclature	Designation Pins/Connections
1	1	1	1	1337653-2	CCA, I/O Interfac	P326 60
2	1	2	1	311P409-4S-B-12	Connector, Sub-	P802 24
3	1	3	1	311P409-1S-B-12	Connector, Sub-	P706 36
Designation λP		λb	πK	πP	πE	πQ
P326 Connector	0.00169	0.00057	1.0	11.89	0.50	0.1
Connections	0.078	0.00026			0.50	1.0
P802 Connector 0.00066		0.00057	1.0	4.62	0.50	0.1
Connections	0.00312	0.00026			0.50	1.0
P706 Connector 0.00095		0.00057	1.0	6.66	0.50	0.1
Connections	<u>0.00468</u>	0.00026			0.50	1.0
					i_{AVG}	ΔT
					0.1	0.01397 22
						Hand Solder, w/o Wrapping
						Crimp

TABLE A1ES-EOS-4

EOS Part Number 1356424-1

Item No.	Qty	Rqd	Part Number	Nomenclature	Designation	Connections/Pins
1	1		1337653-3	CCA, I/O Interface	P327	64
2	1		1356784-1	Transistor Assy		58
3	1		311P409-3P-B-12	Connector, Sub-D	P702	24
4	1		311P409-3S-B-12	Connector, Sub-D	P101	20
	1		311P409-3S-B-12	Connector, Sub-D	P201	20
Designation λp				πK	πE	πQ
P327		0.00184	0.00057	1.0	12.93	0.50
		0.0832	0.0026			0.50
						1.0
Transistor Assy 0.0180294		(see assembly 13567784 failure rate calculations)	0.00014	0.50	1.0	
Connections 0.00406						
P702	0.00066	0.00057	1.0	4.62	0.50	0.1
	0.00312	0.00026			0.50	1.0
J101	0.00057	0.00057	1.0	4.01	0.50	0.1
	0.0026	0.00026			0.50	1.0
J201	0.00057	0.00057	1.0	4.01	0.50	0.1
	<u>0.0026</u>	<u>0.00026</u>			0.50	1.0
	<u>0.11464</u>					

THIS PAGE INTENTIONALY BLANK

TABLE A1ES-EOS-4 (Cont.)

Transistors, Low Frequency, Bipolar		<u>Description</u>	<u>Failure Rate</u> λ_b	<u>$\overline{\lambda}_T$</u>	<u>$\overline{\lambda}_A$</u>	<u>$\overline{\lambda}_R$</u>	<u>$\overline{\lambda}_S$</u>	<u>$\overline{\lambda}_Q$</u>	<u>$\overline{\lambda}_E$</u>
<u>Part Number</u>	<u>Ref/Qty</u>								
JANS2N3741	Q1-Q3	Power PNP	0.00249	0.00074	1.9133	0.7	3.2903	0.2120	2.4
JANS2N3749	Q4-Q6	Power NPN	0.00625	0.00074	4.4878	0.7	3.5199	0.2120	2.4
JANS2N3741	Q7-Q9 (-1 only)	Power PNP	0.00249	0.00074	1.9133	0.7	3.2903	0.2120	2.4
JANS2N3749	Q10-Q12 (-1 only)	Power NPN	0.00625	0.00074	4.4878	0.7	3.5199	0.2120	2.4

Diodes, Low Frequency

<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u> λ_b	<u>$\overline{\lambda}_T$</u>	<u>$\overline{\lambda}_S$</u>	<u>$\overline{\lambda}_C$</u>	<u>$\overline{\lambda}_Q$</u>	<u>$\overline{\lambda}_E$</u>
AS8301-1N5417-S CR1-CR6		Fast Switching Rectifier	0.00028	0.001	1.40046	0.09525	1	0.7
AS8301-1N5417-S CR7-CR12 (-1 only)		Fast Switching Rectifier	0.00028	0.001	1.40046	0.09525	1	0.7

-1 Failure Rate

0.01803

-2 Failure Rate

0.00901

Transistors, Low Frequency, Bipolar

<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Junct.</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Rated Vceo</u>	<u>VCE</u>	<u>Applied (Lin/Sw)</u>	<u>θ_{jc}</u>	<u>Case</u>	<u>Quality</u>
			<u>Temp.</u>	<u></u>	<u></u>	<u></u>	<u></u>	<u>(°C/W)</u>	<u></u>	<u></u>	<u></u>
JANS2N3741	Q1-Q3	Power PNP	55.0	25	2	80	40	Sw	10	TO-66	JAN
JANS2N3749	Q4-Q6	Power NPN	105.0	30	1	80	40	Sw	70	Stud	JAN
JANS2N3741	Q7-Q9 (-1 only)	Power PNP	55.0	25	2	80	40	Sw	10	TO-66	JAN
JANS2N3749	Q10-Q12 (-1 only)	Power NPN	105.0	30	1	80	40	Sw	70	Stud	JAN

Diodes, Low Frequency

<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Rated Type/Avg</u>	<u>Applied Voltage</u>	<u>Actual Voltage</u>	<u>Rated Temp.</u>	<u>Actual Temp.</u>	<u>Watts</u>	<u>θ_{jc}</u>	<u>Case</u>	<u>Quality</u>
			<u>Metal</u>	<u>Metal</u>	<u>Metal</u>	<u>Metal</u>	<u>Metal</u>	<u></u>	<u></u>	<u></u>	<u></u>
AS8301-1N5417-S CR1-CR6		Fast Switching Rectifier	Switch	100	38	35.00	0.0001	10	DO-41	JANTXV	
AS8301-1N5417-S CR7-CR12 (-1 only)		Fast Switching Rectifier	Switch	100	38	35.00	0.0001	10	DO-41	JANTXV	

EOS Part Number 1356425-1

TABLE A1ES-EOS-5

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Pins/Connections
1	1		1337653-3	CCA, I/O Interface	P301	34
2	1		AS8096-9SHR0	Connector, 9 Skt, HF Filter	J3	6
3	1		AS8096-9PHR0	Connector, 9 Pin, HF Filter	J5	7
4	1		AS8096-37SHR0	Connector, 37 Skt, HF Filter	J4	22
7	4		RCR42G560JS	Resistor, 56Ω, (R-39008)	R1-R4	8
Designation λ_B				π_K	π_P	ΔT
P301 Connector				1.0	6.30	0.1
Connections				0.50	1.0	0.01397
Shields				0.50	1.0	22
Designation λ_B				π_E	π_Q	<u>AWG</u>
J3 Connector				1.0	2.02	Hand Solder, w/o Wrapping
Connections				0.50	1.0	Hand Solder, w/ Wrapping
Shields				0.50	1.0	Crimp
Designation λ_B				i_{AVG}		
J5 Connector				0.1		
Connections				0.1		
Shields				0.1		
Designation λ_B				π_R	π_Q	<u>Watts</u>
J4 Connector				1.0	0.03	Hand Solder, w/o Wrapping
Connections				0.50	2	Hand Solder, w/ Wrapping
Ground Lug				0.50	1.0	Crimp
Designation λ_B				π_E	π_Q	<u>Actual</u>
R1-R4				1.0	0.03	0.56
Connections				1.0	0.50	0.56
Ground Lug				0.09320		

THIS PAGE INTENTIONALY BLANK

EOS Part Number 1356426-1

TABLE A1ES-EOS-6

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Pins	Active
1	1		1337653-4	CCA, I/O Interface	P302	78	
2	1		AS8096-37PHR0	Connector, 37 Pin, HF Filter	J2	28	
3	1		AS8381-03-F04N	Connector, 37 Pin, 26AWG Wire	P602	24	
4	1		AS8381-03-A04N	Connector, 9 Pin, 26AWG Wire	P705	4	
5	1		AS8381-03-G04N	Connector, 51 Pin, 26AWG Wire	P601	42	
6	1		311P409-2S-B-12	Connector, Sub-D	J102	14	
	1		311P409-2S-B-12	Connector, Sub-D	J202	14	
Designation λp				λ_b	πK	πP	πQ
P302 Connector 0.00242				0.00057	1.0	17.04	πE
Connections 0.1014				0.0026	0.50	0.50	0.1
J2 Connector 0.00075				0.00057	1.0	5.26	πK
Connections 0.0364				0.0026	0.50	0.50	0.1
P602 Connector 0.00066				0.00057	1.0	4.62	πP
Connections 0.00312				0.00026	0.50	0.50	0.1
P705 Connector 0.00024				0.00057	1.0	1.72	πE
Connections 0.00052				0.00026	0.50	0.50	0.1
P601 Connector 0.00114				0.00057	1.0	7.81	πK
Connections 0.000546				0.00026	0.50	0.50	0.1
J102 Connector 0.00114				0.00057	1.0	1.72	πP
Connections 0.00052				0.00026	0.50	0.50	0.1
J202 Connector 0.00114				0.00057	1.0	7.81	πE
Connections <u>0.00546</u>				0.00026	0.50	0.50	0.1
				0.16035			

THIS PAGE INTENTIONALY BLANK

**APPENDIX A
SECTION A2
METSAT/EOS
AMSU-A MODULE A2
RELIABILITY PREDICTIONS**

Table	Description	Page Number
A2AS	Antenna Subsystem (METSAT/EOS)	A-64
A2RS	Receiver Subsystem (METSAT/EOS)	A-66
A2ES-METSAT	Electronic Subsystem (METSAT)	A-67
A2ES - EOS	Electronic Subsystem (EOS)	A-95

**Table A2AS METSAT/EOS Module A2
Antenna Subsystem**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Antenna Assembly	1331210-2	1	0.37603	0.37603	Table A2AS-1
Diplexer	1331084-1	1	0.38243	0.38243	AE-24689B
Compensation Assembly	1333660-1	1	0.3606	0.3606	METSAT only Table A2AS-2

Total METSAT $\lambda = 1.11906$

Total EOS $\lambda = 0.75846$

**Table A2AS-1 METSAT/EOS Module A2
Antenna Assembly P/N 1331210-1**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Feedhorn	1331231-1	1	0.001	0.001	Aerojet Report 8897-1
Calibration Source and PRT	1331235-1	1	0.008	0.008	Eng Estimate
Drive Assy, Reflector	1333650-1	1	0.36703	0.36703	Table A2AS-1-1

Total METSAT/EOS $\lambda = 0.37603$

**Table A2AS-1-1 METSAT/EOS Module A2
Antenna Assembly Reflector Drive Assy PN 1333650-1**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Rotating Assembly	1333651-1	1	0.1500	0.1500	Eng Estimate
Resolver, Brushless	1331529-1	1	0.00713	0.00713	Vernitron
Motor, Torque D.C.	1333648-1	1	0.20980	0.20980	Vernitron
Connector	G311P10-3P-C-15	1	0.0001	0.0001	Eng Estimate

METSAT/EOS $\lambda = 0.36703$

**Table A2AS-2 Module A2
Compensation Assy P/N 1333660-1 (METSAT only)**

Nomenclature	Part Number	Quantity (n)	λ (f/ 10^6 hr)	n λ	λ Source/Remarks
Bearing, Ball, Duplex Set	1333667-2	1	0.15000	0.15000	Aerojet Report 8897-1
Motor, Torque D.C.	1333648-1	1	0.20980	0.20980	Vernitron Production
Connector, Sub D	G311P10-3P-C-15	1	0.0008	0.0008	Eng Estimate

METSAT $\lambda = 0.3606$

**Table A2RS Module A2
Receiver Subsystem (RS)**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Thermofoil Heater	1337640-3	2	1.7E-6	3.4E-6	NPRD-91
Connector	AS8096-15PT-0	1	0.005	0.005	Eng Estimate
Thermostatic Switch	1337651-1	2	0.00013	0.00026	NPRD-91
Connector	AS8381-04-F04NA	1	0.005	0.005	Eng Estimate
Connector	AS8381-04-D04NA	1	0.005	0.005	Eng Estimate
Channel 1					
Isolator	1331111-2	1	0.01142	0.01142	AE-26025B
23.8 GHz DRO	1336610-1	1	0.04100	0.04100	AE-24682D
Waveguide Attenuator	1331100-1	1	0.00761	0.00761	AE-26110
Mixer/IF Amplifier	1331562-11	1	0.19230	0.19230	Spacek Labs
Bandpass Filter	1331559-6	1	0.03807	0.03807	AE-24687E
IF Attenuator	1331516-X	1	0.01142	0.01142	AE024868
RF Cable Connectors	SMA Type	3 (pair)	0.003	0.009	Aerojet Report 8897-1
Channel 2					
Isolator	1331112-2	1	0.01142	0.01142	AE-26025B
31.4 GHz DRO	1336610-2	1	0.04100	0.04100	AE-24682D
Waveguide Attenuator	1331100-2	1	0.00761	0.00761	AE-26110
Mixer/IF Amplifier	1331562-12	1	0.19230	0.19230	Spacek labs
Bandpass Filter	1331559-3	1	0.03807	0.03807	AE-2487G
IF Attenuator	1331516-X	1	0.01142	0.01142	Aerojet Report 8897-1
RF Cable Connectors	SMA Type	3 (pair)	0.003	0.009	

Total METSAT/EOS λ = 0.63690

**Table A2ES-METSAT Module A2
Electronics Subsystem**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
Detector/Preamp Assembly	1331300-1	1	0.04339	0.04339	Table A2ES-EOS-1
Power Relay and Housekeeping Assy	1356969-2	1	0.07009	0.07009	Table A2ES-METSAT-1 equals P/N 1356908-2. Other misc has no reliability impact
DC-to-DC Converter Assembly	1356010-1	1	0.38243	0.38243	AE-26577
Cables					
Spacecraft Power (W1)	1356431-2	1	0.04440	0.04440	Table A2ES-EOS-21
I/O Interface Power (W2)	1357147-1	1	0.08274	0.08274	Table A2ES-METSAT-3
Scan Drive (W3)	1356946-1	1	0.06024	0.06024	Table A2ES-METSAT-4
I/O Interface (W4)	1356947-1	1	0.14516	0.14516	Table A2ES-METSAT-5
I/O Temp (W5)	1356948-1	1	0.13367	0.13367	Table A2ES-METSAT-6
Cable Extender (W6)	1356817-1	1	0.00204	0.00204	Table A2ES-EOS-22
Cable Extender (W7)	1356818-1	1	0.00710	0.00710	Table A2ES-EOS-23
Cable Extender (W8)	1356819-1	1	0.00241	0.00241	Table A2ES-EOS-24
Signal Processing Assembly (1331120-2)					
Temp Sensor "A" CCA	1338421	1	0.03278	0.03278	Table A2ES-EOS-7
Temp Sensor "B" CCA (Not Mission Critical)	1331682-1	1	N/A		
Temp Sensor Analog MUX CCA	1331688	1	0.00914	0.00914	Table A2ES-EOS-8
Analog MUX and A/D Converter CCA	1356418	1	0.03684	0.03684	Table A2ES-EOS-9
Integrate and Dump Filter CCA	1338424	1	0.01269	0.01269	Table A2ES-EOS-10
Spacecraft Interface No. 1	1331144	1	0.08345	0.08345	Table A2ES-METSAT-7
Spacecraft Interface No. 2	1331147	1	0.05416	0.05416	Table A2ES-METSAT-8
Parallel to Serial Converter	1331150	1	0.06697	0.06697	Table A2ES-METSAT-9
Timing and Control CCA	1331135	1	0.02884	0.02884	Table A2ES-EOS-12
CPU CCA	1356413	1	0.02334	0.02334	Table A2ES-EOS-13
Memory CCA	1331126	1	0.01542	0.01542	Table A2ES-EOS-14
Scan Drive CCAs					
Scan Control Interface CCA	1331129	1	0.00731	0.00731	Table A2ES-EOS-15
Relay Driver and Current Monitor CCA	1356911-2	1	0.06030	0.06030	Table A2ES-METSAT-10
Interface/Converter CCA	1331697	1	0.03492	0.03492	Table A2ES-EOS-17
Resolver-Data Isolator CCA	1334972	1	0.01716	0.01716	Table A2ES-EOS-18
R-D Converter/Oscillator CCA	1337739	1	0.08332	0.08332	Table A2ES-EOS-19
Motor Driver (Comp) CCA	1331694-2	1	0.03874	0.03874	Table A2ES-EOS-20
Motor Driver (Antenna) CCA	1331694-2	1	0.03874	0.03874	Table A2ES-EOS-20

Total A2ES-METSAT λ = 1.6178

THIS PAGE INTENTIONALY BLANK

TABLE A2ES-METSAT-1
METSAT UNIQUE

METSAT XLS
03/13/1996

Diodes				Description		Failure Rate λ_b		$\overline{\lambda}_S$		$\overline{\lambda}_Q$		$\overline{\lambda}_E$	
Part Number	Ref/Qty	CR1-CR4	Switching Diode	0.00012	0.001	1.5649	0.054	1	0.7	0.5	0.5	0.5	0.5
AS8301-1N41481S		CR5, CR6	Switching Diode	0.00006	0.001	1.5649	0.054	1	0.7	0.5	0.5	0.5	0.5
AS8301-1N41481S		VR1	Zener Diode, Vz=5.1	0.00087	0.002	1.2359	1	1	0.7	0.5	0.5	0.5	0.5
Resistors, Fixed, Composition		Description		Failure Rate λ_b		$\overline{\lambda}_R$		$\overline{\lambda}_Q$		$\overline{\lambda}_E$			
Part Number	Ref/Qty	R1	R2	100, 0.125W, Est. Rel.	4.0E-06	0.0007	1	0.03	0.2	0.03	0.2		
RCR05G101JS				1k, 0.125W, Est. Rel.	4.7E-06	0.0008	1	0.03	0.2				
Resistors, Fixed, Film		Description		Failure Rate λ_b		$\overline{\lambda}_R$		$\overline{\lambda}_Q$		$\overline{\lambda}_E$			
Part Number	Ref/Qty	R3-R11	R12-R20 (-1 only)	2.0k, 1%, 0.125W	0.00006	0.0011	1	0.03	0.2				
RLR05C2001FS			R22, R23	2.0k, 1%, 0.125W	0.00006	0.0011	1	0.03	0.2				
RLR05C2001FS			R24, R25 (-1 only)	5.49k, 1%, 0.125W	0.00001	0.0011	1	0.03	0.2				
RLR05C5491FS			R26-R28	5.49k, 1%, 0.125W	0.00001	0.0011	1	0.03	0.2				
RLR05C8061FS			R29-R33 (-1 only)	8.06k, 1%, 0.125W	0.00002	0.0011	1	0.03	0.2				
RLR05C8061FS			R35-R37	8.06k, 1%, 0.125W	0.00003	0.0011	1	0.03	0.2				
RLR05C1002FS			R38, R39	10.0k, 1%, 0.125W	0.00002	0.0011	1	0.03	0.2				
RLR05C1212FS			R40 (-1 only)	12.1k, 1%, 0.125W	0.00001	0.0011	1	0.03	0.2				
RLR05C1212FS			R41-R45	12.1k, 1%, 0.125W	0.00001	0.0011	1	0.03	0.2				
RLR05C1502FS			R46-R51 (-1 only)	15.0k, 1%, 0.125W	0.00003	0.0011	1	0.03	0.2				
RLR05C1502FS			R53-R56	18.2k, 1%, 0.125W	0.00004	0.0011	1	0.03	0.2				
RLR05C1822FS			R57, R58 (-1 only)	18.2k, 1%, 0.125W	0.00003	0.0011	1	0.03	0.2				
RLR05C1822FS			R59	18.2k, 1%, 0.125W	0.00001	0.0011	1	0.03	0.2				
RLR05C1822FS			R60, R61 (-1 only)	13.0k, 1%, 0.125W	0.00001	0.0011	1	0.03	0.2				
RLR05C1822FS			R62, R63 (-1 only)	30.1k, 1%, 0.125W	0.00001	0.0011	1	0.03	0.2				
Resistors, Fixed, Wirewound, Power		Description		Failure Rate λ_b		$\overline{\lambda}_R$		$\overline{\lambda}_Q$		$\overline{\lambda}_E$			
Part Number	Ref/Qty	R64, R65 (-1 only)	2.00, 2W	0.00001	0.0011	1	0.03	0.2					
RWR80S2R00FS		R64, R65 (-2 only)	1.00, 2W	0.00001	0.0011	1	0.03	0.2					
RWR80S1R00FS		R66-R68	1.50, 2W	0.00002	0.0011	1	0.03	0.2					
RWR80S1R50FS		R69-R71 (-1 only)	1.50, 2W	0.00002	0.0011	1	0.03	0.2					
1331073-36		R72-R74 (-1 only)	Resistor Kit, 0.649 to 1.62Ω	0.00002	0.0011	1	0.03	0.2					
1331073-36		R75-R77	Resistor Kit, 0.649 to 1.62Ω	0.00002	0.0011	1	0.03	0.2					

TABLE A2ES-METSAT-1 (Cont.)

METSAT.XLS
03/13/1996

Capacitors, Fixed, Ceramic, General Purpose						
Part Number	Ref/Qty	Description	Failure Rate λ_b	π_{CV}	π_Q	π_E
M123A02BXC104KC	C5-C13	0.1uF, 100V, Est. Rel.	0.00011	0.0007	1.4547	0.03
M123A02BXC104KC	C14-C22 (-1 only)	0.1uF, 100V, Est. Rel.	0.00011	0.0007	1.4547	0.03
M123A02BXC103KC	C24, C25 (-1 only)	0.1uF, 100V, Est. Rel.	0.00003	0.0007	1.4547	0.03
Capacitors, Fixed, Electrolytic, Tantalum, Solid						
Part Number	Ref/Qty	Description	Failure Rate λ_b	π_{CV}	π_Q	π_E
M39003/01-8282	C1, C2	3.3uF, 75V, Est. Rel.	0.00008	0.0085	1.1540	0.33
M39003/01-8194	C3, C4	1.0uF, 50V, Est. Rel.	0.00004	0.0048	1	0.33
Relay, Mechanical						
Part Number	Ref/Qty	Description	Failure Rate λ_b	π_{CV}	π_Q	π_E
G311P754/11-001	K3, K4	Latching, 4PDT	0.01922	0.0061	4.7707	5.5
Connectors						
Part Number	Ref/Qty	Description	Failure Rate λ_b	π_K	π_P	π_E
AS8387-23-28A	J702	37-Pin, Rt. Angle, PWB-type	0.00138	0.0003	1.5	6.4758
AS8387-16-F01NP	J703	Rt. Angle, PWB-type	0.00109	0.0003	1.5	5.0984
AS8387-16-D01NP	J704	Rt. Angle, PWB-type	0.00070	0.0003	1.5	3.2787
AS8387-10-D01NP	J705	Rt. Angle, PWB-type	0.00089	0.0003	1.5	4.1565
AS8387-19-F01NP	J706	Rt. Angle, PWB-type	0.00127	0.0003	1.5	5.9418
Interconnection Assemblies with Plated Through Holes						
Part Number	Ref/Qty	Description	Failure Rate λ_b	π_C	π_Q	π_E
1356910-1	1 (-1 Assembly)	PWB, Pwr Relay/Hskp	0.05677	1.7E-05	2.0098	1
1356910-1	1 (-2 Assembly)	PWB, Pwr Relay/Hskp	0.04402	1.7E-05	2.0098	1

TABLE A2ES-METSAT-1 (Cont.)
METSAT UNIQUE

Diodes	Ref/Qty	Description	Rating	Actual
Part Number				
AS8301-1N41481S	CR1-CR4	Switching Diode	Applied Voltage	θ_{jA}
AS8301-1N41481S	CR5, CR6	Switching Diode	Temp.	Case
AS8301-751A-1	VR1	Zener Diode, VZ=5.1	n/a	θ_{jA}
			Watts	JANTXV
			28.7E-3	DO-35
			28.7E-3	JANTXV
			0.01	DO-35
			10	JANTXV

Resistors, Fixed, Composition	Ref/Qty	Description	Rating	Actual
Part Number				
RCR05G101JS	R1	100, 0.125W, Est. Rel.	Power	Power
RCR05G102JS	R2	1k, 0.125W, Est. Rel.	100	100
			0.125	0.0207
			0.125	S

Resistors, Fixed, Film	Ref/Qty	Description	Rating	Actual
Part Number				
RLR05C2001FS	R3-R11	2.0k, 1%, 0.125W	Power	Power
RLR05C2001FS	R12-R20 (-1 only)	2.0k, 1%, 0.125W	2000	0.0625
RLR05C549FS	R22, R23	5.49k, 1%, 0.125W	2000	0.0625
RLR05C549FS	R24, R25 (-1 only)	5.49k, 1%, 0.125W	5490	0.0625
RLR05C806IFS	R26-R28	8.06k, 1%, 0.125W	5490	0.0625
RLR05C806IFS	R29-R33 (-1 only)	8.06k, 1%, 0.125W	8060	0.0625
RLR05C806IFS	R35-R37	10.0k, 1%, 0.125W	8060	0.0625
RLR05C1002FS	R38, R39	12.1k, 1%, 0.125W	10000	0.0625
RLR05C1212FS	R40 (-1 only)	12.1k, 1%, 0.125W	12100	0.0625
RLR05C1212FS	R41-R45	15.0k, 1%, 0.125W	12100	0.0625
RLR05C1502FS	R46-R51 (-1 only)	15.0k, 1%, 0.125W	15000	0.0625
RLR05C1822FS	R53-R56	18.2k, 1%, 0.125W	15000	0.0625
RLR05C1822FS	R57, R58 (-1 only)	18.2k, 1%, 0.125W	18200	0.0625
RLR05C1822FS	R59	18.2k, 1%, 0.125W	18200	0.0625
RLR05C1302FS	R60, R61 (-1 only)	13.0k, 1%, 0.125W	13000	0.0625
RLR05C3012FS	R62, R63 (-1 only)	30.1k, 1%, 0.125W	30100	0.0625

Resistors, Fixed, Wirewound, Power	Ref/Qty	Description	Rating	Actual
Part Number				
RWR80S2R00FS	R64, R65 (-1 only)	2.00, 2W	Power	Power
RWR80S1R00FS	R64, R65 (-2 only)	1.00, 2W	2	S
RWR80S1R50FS	R66-R68	1.50, 2W	2	S
RWR80S1R50FS	R69-R71 (-1 only)	1.50, 2W	1.5	S
1331073-36	R72-R74 (-1 only)	Resistor Kit, 0.649 to 1.62Ω	2	S
1331073-36	R75-R77	Resistor Kit, 0.649 to 1.62Ω	2	S

TABLE A2ES-METSAT-1 (Cont.)
METSAT UNIQUE

METSAT-XLS
03/13/1996

Capacitors, Fixed, Ceramic, General Purpose		Description	Ref/City	Rated Voltage	Actual Voltage	Quantity
Part Number	Part Number	Ref/City	Ref/City	Temp.	Temp.	Quantity
M123A02BXC104KC	C5-C13	0.1uF, 100V, Est. Rel.	1000000	125	100	15 S
M123A02BXC104KC	C14-C22 (-1 only)	0.1uF, 100V, Est. Rel.	1000000	125	100	15 S
M123A02BXC103KC	C24, C25 (-1 only)	0.1uF, 100V, Est. Rel.	1000000	125	100	15 S
Capacitors, Fixed, Electrolytic, Tantalum, Solid		Description	Ref/City	Rated Voltage	Actual Voltage	Quantity
Part Number	Part Number	Ref/City	Ref/City	Temp.	Temp.	Quantity
M39003/01-8282	C1, C2	3.3uF, 75V, Est. Rel.	3.3	85	75	28 S
M39003/01-8194	C3, C4	1.0uF, 50V, Est. Rel.	1.0	85	50	5 S
Relay, Mechanical		Description	Ref/City	Oper. Load	Load	Quantity
Part Number	Part Number	Ref/City	Ref/City	Load Type	Load Induct.	Duty Cycle
G311P754/11-001	K3, K4	Latching, 4PDT	K3, K4	0.25	0.5	0.1 U 0.01
Connectors		Description	Ref/City	Active Pins	Pin Gauge	Temp. Rise
Part Number	Part Number	Ref/City	Ref/City	Pins	Gauge	Quantity
AS8387-23-28A	J702	37-Pin, Rt. Angle, PWB-type	J702	35	20	0.1 0.01 Mil 0.5
AS8387-16-F01NP	J703	Rt. Angle, PWB-type	J703	27	20	0.1 0.01 Mil 0.5
AS8387-16-D01NP	J704	Rt. Angle, PWB-type	J704	15	20	0.1 0.01 Mil 0.5
AS8387-10-D01NP	J705	Rt. Angle, PWB-type	J705	21	20	0.1 0.01 Mil 0.5
AS8387-19-F01NP	J706	Rt. Angle, PWB-type	J706	32	20	0.1 0.01 Mil 0.5
Interconnection Assemblies with Plated Through Holes		Description	Ref/City	Layers	Quality	Wave Solder
Part Number	Part Number	Ref/City	Ref/City	PTHs->	PTHs->	Hand Solder
1356910-1	1 (-1 Assembly)	PWB, Pwr Relay/Hskp	1356910-1	6	Mil	445
1356910-1	1 (-2 Assembly)	PWB, Pwr Relay/Hskp	1356910-1	6	Mil	345

TABLE A2ES-METSAT-3

METSAT Part Number 1357147

Item No.	Qty	Reqd	Part Number	Nomenclature	Active Designation	Pins
1	1	1	1337653-2	CCA, I/O Interface	P324	39
2	1	1	AS8096-25PLR0	Connector	P902	23
3	1	1	AS8381-04-G04NA	Connector, 51 Pin, 26AWG Wire	P706	16
Designation λP				λb	πE	i_{AVG} ΔT AWG
P324 Connector	0.000103	0.00057	0.00057	1.0	7.22	0.50 0.1 0.01397 22
Connections	0.0507	0.0026	0.0026		0.50	1.0
P902 Connector	0.00063	0.00057	0.00057	1.0	4.46	0.50 0.1 0.01397 22
Connections	0.0299	0.0026	0.0026		0.50	1.0
P706 Connector	0.00049	0.00057	0.00057	1.0	3.42	0.50 0.1 0.01397 22
Connections	<u>0.00208</u>	<u>0.00026</u>	<u>0.00026</u>		0.50	1.0
						Crimp
						0.08274

TABLE A2ES-METSAT-4

METSAT Part Number 1356947

TABLE A2ES-METSAT-5

Item No.	Qty Rqrd	Part Number	Nomenclature	Designation	Pins/Connections
1	1	1337653-3	CCA, I/O Interface	P301	48
2	1	AS8096-9SHRO	Connector, 9 Skt, HF Filter	J2	6
3	1	26139-1	Connector,	J3	6
4	1	AS8096-25PHRO	Connector, 25 Pin, HF Filter	J4	18
5	1	AS8096-15SHRO	Connector, 15 Skt, HF Filter	J5	11
7	1	AS8096-37SHRO	Connector, 37 Skt, HF Filter	J7	13
<u>Designation λ_p</u>					
<u>P301 Connector 0.00129</u>					
Connections 0.0637					
Ground Lug 0.00026					
<u>J2 Connector 0.00029</u>					
Connections 0.0091					
Ground Lug 0.00026					
<u>J3 Connector 0.00029</u>					
Connections 0.0091					
Ground Lug 0.00026					
<u>J4 Connector 0.00053</u>					
Connections 0.0247					
Ground Lug 0.00026					
<u>J5 Connector 0.00039</u>					
Connections 0.0156					
Ground Lug 0.00026					
<u>J7 Connector 0.00043</u>					
Connections 0.0182					
Ground Lug 0.00026					
<u>0.14516</u>					
<u>Designation λ_p</u>					
<u>P301 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J2 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J3 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J4 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J5 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J7 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>Designation λ_p</u>					
<u>P301 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J2 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J3 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J4 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J5 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J7 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>Designation λ_p</u>					
<u>P301 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J2 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J3 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J4 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J5 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J7 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>Designation λ_p</u>					
<u>P301 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J2 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J3 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J4 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J5 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J7 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>Designation λ_p</u>					
<u>P301 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J2 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J3 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J4 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J5 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J7 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>Designation λ_p</u>					
<u>P301 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J2 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J3 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J4 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J5 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J7 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>Designation λ_p</u>					
<u>P301 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J2 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J3 Connector 0.00057</u>					
Connections 0.0026					
Ground Lug 0.00026					
<u>J4 Connector 0.00057</u>					
Connections 0.0026					

A-75

Report 9831C
March 1996

A2W4 Cable Assembly

TABLE A2ES-METSAT-6

METSAT Part Number 1356948

Item No.	Qty	Part Number	Nomenclature	Designation	Active Pins
1	1	1337653-4	CCA, I/O Interface	P302	46
2	1	AS8096-37PHR0	Connector, 37Pin, HF Filter	J6	17
3	1	311P409-2S-B-12	Connector, Sub-D	P511	12
4	1	AS8096-24PLR0	Connector, 24 Pin, LF Filter	J102	17
5	1	AS8381-03-F04N	Connector w/26AWG Wire	P602	19
Designation λP		λb	πK πP	πE	i_{AVG} ΔT AWG
P302 Connector	0.00123	0.00057	1.0 8.63	0.50	0.1 0.01397 22
Connections	0.0598	0.0026		0.50	<i>Hand Solder, w/o Wrapping</i>
J6 Connector	0.00051	0.00057	1.0 3.57	0.50	0.1 0.01397 22
Connections	0.0221	0.0026		0.50	<i>Hand Solder, w/o Wrapping</i>
Ground Lug	0.00026	0.00026		0.50	<i>Crimp</i>
P511 Connector	0.00041	0.00057	1.0 2.86	0.50	0.1 0.01397 22
Connections	0.00156	0.00026		0.50	<i>Crimp</i>
J102 Connector	0.00051	0.00057	1.0 3.57	0.50	0.1 0.01397 22
Connections	0.0221	0.0026		0.50	<i>Hand Solder, w/o Wrapping</i>
P602 Connector	0.00051	0.00057	1.0 3.57	0.50	0.1 0.01397 22
Connections	<u>0.0247</u>	0.0026		0.50	<i>Hand Solder, w/o Wrapping</i>
		0.13367			

TABLE A2ES-METSAT-7
METSAT UNIQUE

METSAT.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>π_I</u>	<u>π_E</u>	<u>π_Q</u>	<u>π_L</u>	<u>C_1</u>	<u>C_2</u>	
AS8083-27	U1	3-to-8 Line Decoder	0.00110	0.16218	0.5	0.25	1	0.01	0.00559	
AS8083-28	U2, U15, U16	8-Bit I/O Port	0.00448	0.16389	0.5	0.25	1	0.01	0.00867	
AS8083-08	U3, U5, U6	Hex Inverter (Schmitt Trig.)	0.00310	0.17121	0.5	0.25	1	0.01	0.00484	
AS8083-08	U4	Hex Inverter (Schmitt Trig.)	0.00101	0.16328	0.5	0.25	1	0.01	0.00484	
AS8322R05554SEX	U8-U10	Hex Buffer	0.00335	0.16721	0.5	0.25	1	0.01	0.00559	
AS8332R05554SEX	U11	Hex Buffer	0.00111	0.16328	0.5	0.25	1	0.01	0.00559	
AS8083-27	U17-U19	8-Bit I/O Port	0.00448	0.16389	0.5	0.25	1	0.01	0.00867	
AS8332R17401SCX	U21	Hex Inverter	0.00101	0.16135	0.5	0.25	1	0.01	0.00484	
Diodes, Low Frequency										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_I</u>	<u>π_S</u>	<u>π_C</u>	<u>π_Q</u>	<u>π_E</u>	
AS8301-1N5417-S	CR1	Fast Switching Rectifier	0.00003	0.00100	1.40498	0.054	1	0.7	0.5	
Resistors, Fixed, Film										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_R</u>	<u>π_Q</u>	<u>π_E</u>			
RNC60E1100FS	R1	110-ohm, 1%, 0.125W	0.00001	0.00105	1	0.03	0.2			
RNC60E2001FS	R2, R4	2k, 1%, 0.125W	0.00001	0.00066	1	0.03	0.2			
RNC60E1003FS	R3	100k, 1%, 0.125W	* 4.5E-06	0.00068	1.1	0.03	0.2			
RNC60E1001FS	R5	1k, 1%, 0.125W	3.9E-06	0.00066	1	0.03	0.2			
Resistors, Network, Fixed, Film										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_I</u>	<u>π_N</u>	<u>π_Q</u>			
26046-6	RN1	100k, 0.125W	0.00019	0.00006	1.25426	5	1			
26046-6	RN3, RN4	100k, 0.125W	0.00030	0.00006	1.25426	4	1			
26046-6	RN6	100k, 0.125W	0.00008	0.00006	1.25426	2	1			
26046-6	RN8, 10, 12, 14	100k, 0.125W	0.00090	0.00006	1.25426	6	1			
26046-3	RN2	2k, 0.125W	0.00008	0.00006	1.37863	2	1			
26046-3	RN5	2k, 0.125W	0.00004	0.00006	1.37863	1	1			
26046-3	RN7,9,11,13,15,17	2k, 0.125W	0.00074	0.00006	1.37863	3	1			
26046-2	RN16, RN18	100k, 0.125W	0.00015	0.00006	1.25426	2	1			
Capacitors, Fixed, Ceramic, General Purpose										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_CV</u>	<u>π_Q</u>				
M123A02BXC104KC	C2, C37-42	Est. Rel., 0.1uF, 50V	0.00009	0.00073	1.45473	0.03				
M123A02BXC104KC	C4-8, C13	Est. Rel., 0.1uF, 50V	0.00009	0.00091	1.45473	0.03				
M39014/01-1571	C11,12,14-17,20-35	Est. Rel., 5600pF, 100V	0.00019	0.00073	1.05946	0.03				

TABLE A2ES-METSAT-7 (Cont.)
METSAT UNIQUE

METSAT.xls
03/13/1996

Capacitors, Fixed, Electrolytic, Tantalum		Description	Failure Rate	λ_b	π_{CV}	π_{SR}	π_Q	π_E
Part Number	Ref/Qty							
M3900301-8209	C1	Est. Rel., 3.3uF, 50V	0.00002	0.00476	1.15404	0.33	0.03	0.4
M3900301-8209	C3	Est. Rel., 3.3uF, 50V	0.00002	0.00527	1.15404	0.33	0.03	0.4
Connector, PCB	Ref/Qty	Description	Failure Rate	λ_b	π_K	π_P	π_E	
1337748-1	P1	Connector	0.00337	0.00028	1.5	15.79363	0.5	
Interconnection Assemblies with Plated Through Holes								
Part Number	Ref/Qty	Description	Failure Rate	λ_b	π_C	π_Q	π_E	π_N
1337294-1	1	PWB, Spacecraft I/F No 1	0.07617	0.00002	2.00978	1	0.5	597
Total Failure Rate:			<u>0.10214</u>					

TABLE A2ES-METSAT-7 (Cont.)
METSAT UNIQUE

METSAT.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors													
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Comp.</u>	<u>Tech.</u>	<u>E_A</u>	<u>Junct.</u>	<u>θ_{jc}</u>	<u>(°C/W)</u>	<u>Watts</u>	<u>Temp.</u>	<u>Years</u>	<u>Package</u>	<u>Quality</u>
AS8083-27	U1	3-to-8 Line Decoder	32	Digital	0.35	35.96	0.08	12	16	>2	Hermetic	S	
AS8083-28	U2, U15, U16	8-Bit I/O Port	46	Digital	0.35	36.21	0.08	15.1	24	>2	Hermetic	S	
AS8083-08	U3, U5, U6	Hex Inverter (Schmitt Trig.)	18	Digital	0.35	37.24	0.08	28	14	>2	Hermetic	S	
AS8083-08	U4	Hex Inverter (Schmitt Trig.)	12	Digital	0.35	36.12	0.04	28	14	>2	Hermetic	S	
AS8322R05554SEX	U8-U10	Hex Buffer	4	Digital	0.35	36.68	0.06	28	16	>2	Hermetic	S	
AS8332R05554SEX	U11	Hex Buffer	3	Digital	0.35	36.12	0.04	28	16	>2	Hermetic	S	
AS8083-27	U17-U19	8-Bit I/O Port	46	Digital	0.35	36.21	0.08	15.1	24	>2	Hermetic	S	
AS8332R17401SCX	U21	Hex Inverter	3	Digital	0.35	35.84	0.03	28	14	>2	Hermetic	S	
Diodes, Low Frequency		Description		Rated		Applied		Actual		θ_{jc}		Quality	
<u>Part Number</u>	<u>Ref/Qty</u>			<u>Contact</u>	<u>Type/Appl</u>	<u>Voltage</u>	<u>Temp.</u>	<u>Voltage</u>	<u>Watts</u>	<u>(°C/W)</u>	<u>Case</u>	<u>DO-41</u>	<u>JANTXV</u>
AS8301-1N5417-S	CR1	Fast Switching Rectifier		Metal	Switch	100	10	35.10	0.01	10	DO-41		
Resistors, Fixed, Film		Description		Rated		Actual		Power		Power		Quality	
<u>Part Number</u>	<u>Ref/Qty</u>			<u>Ohms</u>		<u>Ohms</u>		<u>Power</u>		<u>Power</u>		<u>Quality</u>	
RNC60E1100FS	R1	110-ohm, 1%, 0.125W	110	0.125		110	0.125	0.05455		0.0025		S	
RNC60E2001FS	R2, R4	2k, 1%, 0.125W	2000	0.125		100000	0.125	0.0005		0.0005		S	
RNC60E1003FS	R3	100k, 1%, 0.125W	10000	0.125		1000	0.125	0.0015		0.0015		S	
RNC60E1001FS	R5	1k, 1%, 0.125W	1000000	0.125									
Resistors, Network, Fixed, Film		Description		Rated		Actual		Power		Power		Quality	
<u>Part Number</u>	<u>Ref/Qty</u>			<u>Ohms</u>		<u>Ohms</u>		<u>Power</u>		<u>Power</u>		<u>Quality</u>	
26046-6	RN1	100k, 0.125W	100000	0.125		100000	0.125	0.0001		0.0001		S	
26046-6	RN3, RN4	100k, 0.125W	100000	0.125		100000	0.125	0.0001		0.0001		S	
26046-6	RN6	100k, 0.125W	100000	0.125		100000	0.125	0.0001		0.0001		S	
26046-6	RN8, 10, 12, 14	100k, 0.125W	100000	0.125		100000	0.125	0.0001		0.0001		S	
26046-3	RN2	2k, 0.125W	2000	0.125		2000	0.125	0.005		0.005		S	
26046-3	RN5	2k, 0.125W	2000	0.125		2000	0.125	0.005		0.005		S	
26046-3	RN7, 9, 11, 13, 15, 17	2k, 0.125W	2000	0.125		100000	0.125	0.0001		0.0001		S	
26046-2	RN16, RN18	100k, 0.125W	1000000	0.125									
Capacitors, Fixed, Ceramic, General Purpose		Description		Rated		Actual		Voltage		Voltage		Quality	
<u>Part Number</u>	<u>Ref/Qty</u>			<u>pF</u>	<u>Temp.</u>	<u>100000</u>	<u>85</u>	<u>50</u>		<u>50</u>		<u>5</u>	<u>S</u>
M123A02BXC104KC	C2, C37-42	Est. Rel., 0.1uF, 50V	100000	85		100000	85	50		50		10	S
M123A02BXC104KC	C4-8, C13	Est. Rel., 0.1uF, 50V	5600	85		5600	85	100		100		10	S
M39014/01-1571	C11,12,14-17,20-35	Est. Rel., 5600pF, 100V											

METSAT.xls
03/13/1996

TABLE A2ES-METSAT-7 (Cont.)
METSAT UNIQUE

Capacitors, Fixed, Electrolytic, Tantalum		Description	µF	Rated Temp.	Rated Voltage	Actual Voltage	Actual Quality
Part Number	Ref/Qty						
M39003/01-8209	C1	Est. Rel., 3.3uF, 50V	3.3	85	50	5	S
M39003/01-8209	C3	Est. Rel., 3.3uF, 50V	3.3	85	50	10	S
Connector, PCB	Ref/Qty	Description	Active Pin	Avg. Current	Temp. Rise	Quality per 1000 hours	Male / Unmate
1337748-1	P1	Connector	74	26	0.1	0.03	0.5
Interconnection Assemblies with Plated Through Holes							
Part Number	Ref/Qty	Description	Layers	Quality Mil	Wave Solder PTHs->	PTHs-> Hand Solder	
1337294-1	1	PWB, Spacecraft I/F No 1	6				597

TABLE A2ES-METSAT-8
METSAT UNIQUE

Microcircuits, Gate/Logic Arrays and Microprocessors								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>π_T</u>	<u>π_E</u>	<u>π_Q</u>	<u>π_L</u>	
AS8083-08	U1	Hex Inverter (Schmitt Trig.)	0.00100	0.15614	0.25	1	0.01	
AS8332R05554SEX	U2	Hex Buffer	0.00110	0.16173	0.25	1	0.01	
AS8083-08	U5, U6	Hex Inverter (Schmitt Trig.)	0.00199	0.15692	0.25	1	0.01	
AS8083-08	U7	Hex Inverter (Schmitt Trig.)	0.00100	0.1565	0.25	1	0.01	
AS8083-08	U8	Hex Inverter (Schmitt Trig.)	0.00101	0.16218	0.25	1	0.01	
AS8083-06	U9	Voltage Level Shifter	0.00110	0.15971	0.25	1	0.01	
Diodes, Low Frequency								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_T</u>	<u>π_S</u>	<u>π_C</u>	
AS8301-1N5417-S	CR1	Fast Switching Rectifier	0.00003	0.001	1.44664	0.054	1	0.7
AS8301-751A-1	VR1	Zener Diode, Vz=5.1	0.00087	0.002	1.23585	1	1	0.7
Resistors, Fixed, Film								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_R</u>	<u>π_Q</u>	<u>π_E</u>	
RNC60E1100FS	R1	110-ohm, 1%, 0.125W	5.8E-06	0.00097	1	0.03	0.2	
RNC60B1001FS	R2	1K, 1%, 0.125W	4.1E-06	0.00068	1	0.03	0.2	
RNC60J2001FS	R3, R5	2K, 1%, 0.125W	8.1E-06	0.00068	1	0.03	0.2	
RNC60E1002FS	R4	10K, 1%, 0.125W	3.9E-06	0.00065	1	0.03	0.2	
RNC60E2000FS	R6	200-ohm, 1%, 0.125W	6.1E-06	0.00101	1	0.03	0.2	
Resistors, Network, Fixed, Film								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_T</u>	<u>π_N</u>	<u>π_E</u>	
26046-3	RN11, 2, 18, 20, 23, 25, 2	2k, 0, 0.125W	0.00087	0.00006	1.373863	3	1	0.5
26046-6	RN3, RN4	100k, 0, 0.125W	0.00045	0.00006	1.25426	6	1	0.5
26046-1	RN22, 24, 26, 28	10k, 0, 0.125W	0.00046	0.00006	1.27636	3	1	0.5
26046-2	RN29, RN30	100k, 0, 0.125W	0.00015	0.00006	1.25426	2	1	0.5
26046-3	RN31	2k, 0, 0.125W	0.00008	0.00006	1.373863	2	1	0.5
Capacitors, Fixed, Ceramic, General Purpose								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>π_CV</u>	<u>π_Q</u>	<u>π_E</u>	
M123A02BXC104KC	C1	Est. Rel., 0.1uF, 100V	1.27E-05	0.00073	1.45473	0.03	0.4	
M39014/01-1351	C2-C5	Est. Rel., 470pF, 200V	2.72E-05	0.0007	0.8067	0.03	0.4	
M39014/01-1571	C6, C47, C48	Est. Rel., 56000pF, 100V	2.77E-05	0.00073	1.05946	0.03	0.4	
M123A02BXC104KC	C19-C34	Est. Rel., 0.1uF, 100V	1.96E-04	0.0007	1.45473	0.03	0.4	
M39014/01-1347	C35	Est. Rel., 270pF, 200V	6.40E-06	0.0007	0.75899	0.03	0.4	
M123A02BXC104KC	C36, C42	Est. Rel., 0.1uF, 100V	2.53E-05	0.00073	1.45473	0.03	0.4	
M123A02BXC104KC	C39-C41	Est. Rel., 0.1uF, 100V	3.68E-05	0.0007	1.45473	0.03	0.4	
M123A02BXC104KC	C43	Est. Rel., 0.1uF, 100V	1.23E-05	0.0007	1.45473	0.03	0.4	

Report 9831C
March 1996

TABLE A2ES-METSAT-8 (Cont.)
METSAT UNIQUE

METSAT XS
03/13/1996

Capacitors, Fixed, Electrolytic, Tantalum		Description	Failure Rate	λ_b	π_{CV}	π_{SR}	π_Q	π_E
<u>Part Number</u>	<u>Ref/Qty</u>	Est. Rel., 3.3μF, 50V	2.41E-05	0.00527	1.15404	0.33	0.03	0.4
M39003/01-8209	C44	Est. Rel., 3.3μF, 50V	2.18E-05	0.00476	1.15404	0.33	0.03	0.4
M39003/01-8209	C45	Est. Rel., 3.3μF, 50V	2.17E-05	0.00475	1.15404	0.33	0.03	0.4
M39003/01-8209	C46							
Connector, PCB	Ref/Qty	Description	Failure Rate	λ_b	π_K	π_P	π_E	
1337748-1	P1	Connector	0.00254	0.00028	1.5	11.8853	0.5	
Interconnection Assemblies with Plated Through Holes								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	λ_b	π_C	π_Q	π_E	
1337295-1	1	PWB, Spacecraft I/F No 2	0.04828	1.7E-05	1.7917	1	0.5	N1 0 N2 384
Total Failure Rate:			<u>0.06136</u>					

TABLE A2ES-METSAT-8 (Cont.)
METSAT UNIQUE

METSAT.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors															
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Compl.</u>	<u>Tech.</u>	<u>E_A</u>	<u>Junct.</u>	<u>Temp.</u>	<u>Watts</u>	<u>L²C/W</u>	<u>Pins</u>	<u>Mfr</u>	<u>Years</u>	<u>Package</u>	<u>Quality</u>	
AS8083-08	U1	Hex Inverter (Schmitt Trig.)	18	Digital	0.35	35.07	0.006	12	14	>2	Hermetic	S			
AS8332R05554SEX	U2	Hex Buffer	6	Digital	0.35	35.90	0.032	28	16	>2	Hermetic	S			
AS8083-08	U5, U6	Hex Inverter (Schmitt Trig.)	18	Digital	0.35	35.19	0.01561	12	14	>2	Hermetic	S			
AS8083-08	U7	Hex Inverter (Schmitt Trig.)	18	Digital	0.35	35.12	0.0104	12	14	>2	Hermetic	S			
AS8083-08	U8	Hex Inverter (Schmitt Trig.)	12	Digital	0.35	35.96	0.08	12	14	>2	Hermetic	S			
AS8083-06	U9	Voltage Level Shifter	32	Digital	0.35	35.60	0.05	12	16	>2	Hermetic	S			
Diodes, Low Frequency															
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Contact</u>	<u>Type/App</u>	<u>Voltage</u>	<u>Rated</u>	<u>Applied</u>	<u>Junct.</u>	<u>Actual</u>	<u>θ_{JC}</u>	<u>Mfr</u>	<u>Years</u>	<u>Case</u>	<u>Quality</u>	
AS8301-1N5417-S	CR1	Fast Switching Rectifier	Metall	Voltage	100	10	36.00	0.1	10	DO-41	JANTXV				
AS8301-751A-1	VR1	Zener Diode, V _Z =5.1	Metall	V. Ref.	n/a	n/a	35.10	0.01	10	DO-35	JANTXV				
Resistors, Fixed, Film															
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Ohms</u>	<u>Rated</u>	<u>Actual</u>	<u>Power</u>	<u>Power</u>	<u>Switch</u>	<u>Voltage</u>	<u>Temp.</u>	<u>Power</u>	<u>Years</u>	<u>Case</u>	<u>Quality</u>	
RNC60E1100FS	R1	110-ohm, 1%, 0.125W	110	0.125	0.0455										
RNC60B1001FS	R2	1K, 1%, 0.125W	1000	0.125	0.0053										
RNC60J2001FS	R3, R5	2K, 1%, 0.125W	2000	0.125	0.0050										
RNC60E1002FS	R4	10K, 1%, 0.125W	10000	0.125	0.0010										
RNC60E2000FS	R6	200-ohm, 1%, 0.125W	200	0.125	0.0500										
Resistors, Network, Fixed, Film															
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Ohms</u>	<u>Rated</u>	<u>Actual</u>	<u>Power</u>	<u>Power</u>	<u>Switch</u>	<u>Voltage</u>	<u>Temp.</u>	<u>Power</u>	<u>Years</u>	<u>Case</u>	<u>Quality</u>	
26046-3	RN1, 2, 18, 20, 23, 25, 2	2k, 0.125W	2000	0.125	0.0050										
26046-6	RN3, RN4	100k, 0.125W	100000	0.125	0.0001										
26046-1	RN22, 24, 26, 28	10k, 0.125W	10000	0.125	0.0010										
26046-2	RN29, RN30	100k, 0.125W	100000	0.125	0.0001										
26046-3	RN31	2k, 0.125W	2000	0.125	0.0050										
Capacitors, Fixed, Ceramic, General Purpose															
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>pF</u>	<u>Rated</u>	<u>Actual</u>	<u>Voltage</u>	<u>Voltage</u>	<u>Temp.</u>	<u>Temp.</u>	<u>Voltage</u>	<u>Mfr</u>	<u>Years</u>	<u>Case</u>	<u>Quality</u>	
M123A02BXC104KC	C1	Est. Rel., 0.1μF, 100V	100000	85	100	10									
M39014/01-1351	C2-C5	Est. Rel., 470pF, 200V	470	85	200	10									
M39014/01-1571	C6, C47, C48	Est. Rel., 5600pF, 100V	5600	85	100	10									
M123A02BXC104KC	C19-C34	Est. Rel., 0.1μF, 100V	100000	85	100	4.7									
M39014/01-1347	C35	Est. Rel., 270pF, 200V	270	85	200	10									
M123A02BXC104KC	C36, C42	Est. Rel., 0.1μF, 100V	100000	85	100	10									
M123A02BXC104KC	C39-C41	Est. Rel., 0.1μF, 100V	100000	85	100	4.7									
M123A02BXC104KC	C43	Est. Rel., 0.1μF, 100V	100000	85	100	5									

TABLE A2ES-METSAT-8 (Cont.)

METSAT-XLS
0313/1996

METSAT UNIQUE

Capacitors, Fixed, Electrolytic, Tantalum		METSAT UNIQUE					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>uF</u>	<u>Rated Temp.</u>	<u>Rated Voltage</u>	<u>Actual Voltage</u>	<u>Quality</u>
M39003/01-8209	C44	Est. Rel., 3.3uF, 50V	3.3	85	50	10	S
M39003/01-8209	C45	Est. Rel., 3.3uF, 50V	3.3	85	50	5	S
M39003/01-8209	C46	Est. Rel., 3.3uF, 50V	3.3	85	50	4.7	S
Connector, PCB		<u>Description</u>	<u>Active Pins</u>	<u>Avg. Gauge</u>	<u>Temp. Current</u>	<u>Rise</u>	<u>Mate / Unmate Quality Per 1000 hours</u>
1337748-1	P1	Connector	60	26	0.1	0.03	0.5

Interconnection Assemblies with Plated Through Holes

<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Layers</u>	<u>Quality</u>	<u>Wave Solder</u>	<u>PTHs-></u>	<u>Hand Solder</u>
1337295-1	1	PWB, Spacecraft I/F No 2	5	Mill			384

TABLE A2ES-METSAT-9
METSAT UNIQUE

METSAT-XLS
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors				<u>C2</u>	
Part Number	Ref/Qty	Description	Failure Rate	<u>π_I</u>	<u>π_Q</u>
25012/03-1	U1	3-to-8 Line Decoder	0.00109	0.15651	0.25
25012/02-1	U2-US	8-Bit I/O Port	0.00590	0.15672	0.25
25012/10-2	U6, U7	Parallel FIFO (1K x 9)	0.00822	0.1753	0.25
M38510H05754SEX	U8, U9	8-Stage Static Shift Register	0.00218	0.15687	0.25
M38510H05553SEX	U10	Hex Inverter	0.00100	0.15781	0.25
26043-8	U11	Hex Inverter (Schmitt Trig.)	0.00100	0.15687	0.25
M38510H05554SEX	U12	Hex Buffer	0.00100	0.15781	0.25
M38510H05151SCX	U13	Dual 'D' Flip-Flop	0.00100	0.15687	0.25
M38510R17001SCX	U14	Quad AND	0.00100	0.15687	0.25
M38510H17101SCX	U15	Quad OR	0.00100	0.15687	0.25
25012/13-1	U17	Hex Buffer	0.00100	0.15889	0.25
Resistors, Fixed, Composition				<u>C1</u>	
Part Number	Ref/Qty	Description	Failure Rate	<u>λ_b</u>	<u>λ_R</u>
RCR07G104JS	R1-R17	Est. Rel., 100K, 0.25W	7.14E-05	0.0007	1
RCR07G511JS	R19, R20	Est. Rel., 510, 0.25W	8.40E-06	0.0007	1
Resistors, Fixed, Film				<u>E</u>	
Part Number	Ref/Qty	Description	Failure Rate	<u>λ_b</u>	<u>λ_R</u>
RNC60E1651FS	R18, R23	1.65K, 1%, 0.125W	7.98E-06	0.00067	1
RNC55J3161FS	R21	3.16K, 1%, 0.1W	3.95E-06	0.00066	1
RNC55J1781FS	R22	1.78K, 1%, 0.1W	4.01E-06	0.00067	1
RNC55J4022FS	R24	40.2K, 1%, 0.1W	3.89E-06	0.00065	1
Capacitors, Fixed, Ceramic, General Purpose				<u>E</u>	
Part Number	Ref/Qty	Description	Failure Rate	<u>λ_b</u>	<u>λ_R</u>
M123A02BPC391FC	C1, C6	Est. Rel., 0.1uF, 100V	1.33E-05	0.0007	0.79032
M3901401-1339	C2, C3	Est. Rel., 100pF, 200V	1.14E-05	0.0007	0.68043
M3901401-1329	C4	Est. Rel., 27pF, 200V	4.95E-06	0.0007	0.58916
M123A02BXB104KC	C8, C11-C19	Est. Rel., 0.1uF, 100V	1.23E-04	0.0007	1.45473
M3901401-1575	C9, C10	Est. Rel., 0.1uF, 100V	2.45E-05	0.0007	1.45473
Capacitors, Fixed, Electrolytic, Tantalum				<u>E</u>	
Part Number	Ref/Qty	Description	Failure Rate	<u>λ_b</u>	<u>λ_R</u>
M3900301-8209	C7	Est. Rel., 3.3uF, 50V	2.18E-05	0.00476	1.15404

TABLE A2ES-METSAT-9(Cont.)
METSAT UNIQUE

Connector, PCB		Ref/Qty	Description	Failure Rate	λ_b	π_K	π_P	π_E
1337748-1	P1		Connector	0.00028	1.5		7.22282	0.5
Interconnection Assemblies with Plated Through Holes								
Part Number	Ref/Qty		Description	Failure Rate	λ_b	π_C	π_Q	π_E
1337312-1	1		PWB, Parallel to Ser Cnvrtr	0.06521	1.7E-05	1.55672	1	0.5
Total Failure Rate:				<u>0.09153</u>				

TABLE A2ES-METSAT-9(Cont.)
METSAT UNIQUE

METSAT.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors						
Part Number	Ref/Qty	Description	Comp.	Tech.	E _a	θ _{jc}
25012/03-1	U1	3-to-8 Line Decoder	32	Digital	0.35	35.13
25012/02-1	U2-U5	8-Bit I/O Port	46	Digital	0.35	35.16
25012/10-2	U6, U7	Parallel FIFO (1K x 9)	9000	Digital	0.35	37.80
M38510H05754SEX	U8, U9	8-Stage Static Shift Register	25	Digital	0.35	35.18
M38510H05553SEX	U10	Hex Inverter	6	Digital	0.35	35.32
26043-8	U11	Hex Inverter (Schmitt Trig.)	3	Digital	0.35	35.18
M38510H05554SEX	U12	Hex Buffer	3	Digital	0.35	35.32
M38510H05151SCX	U13	Dual 'D' Flip-Flop	16	Digital	0.35	35.18
M38510R17001SCX	U14	Quad AND	5	Digital	0.35	35.18
M38510H17101SCX	U15	Quad OR	10	Digital	0.35	35.18
25012/13-1	U17	Hex Buffer	6	Digital	0.35	35.48
Resistors, Fixed, Composition						
Part Number	Ref/Qty	Description	Rating	Actual Power	Power	Quality
RCR07G104JS	R1-R17	Est. Rel., 100K, 0.25W	100000	0.25	0.00005	S
RCR07G511JS	R19, R20	Est. Rel., 510, 0.25W	510	0.25	0.0098	S
Resistors, Fixed, Film						
Part Number	Ref/Qty	Description	Rating	Actual Power	Power	Quality
RNC60E1651FS	R18, R23	1.65K, 1%, 0.12W	1650	0.125	0.00303	S
RNC55J3161FS	R21	3.16K, 1%, 0.1W	3160	0.1	0.00158	S
RNC55J1781FS	R22	1.78K, 1%, 0.1W	1780	0.1	0.00281	S
RNC55J4022FS	R24	40.2K, 1%, 0.1W	40200	0.1	0.00012	S
Capacitors, Fixed, Ceramic, General Purpose						
Part Number	Ref/Qty	Description	Rating	Rated Voltage	Voltage	Quality
M123A02BPC391FC	C1, C6	Est. Rel., 0.1μF, 100V	390	85	5	S
M39014/01-1339	C2, C3	Est. Rel., 100pF, 200V	100	85	5	S
M39014/01-1329	C4	Est. Rel., 27pF, 200V	27	85	200	S
M123A02BXB104KC	C8, C11-C19	Est. Rel., 0.1μF, 100V	100000	85	100	S
M39014/01-1575	C9, C10	Est. Rel., 0.1μF, 100V	100000	85	100	S
Capacitors, Fixed, Electrolytic, Tantalum						
Part Number	Ref/Qty	Description	Rating	Rated Voltage	Voltage	Quality
M39003/01-8209	C7	Est. Rel., 3.3μF, 50V	3.3	85	50	S

TABLE A2ES-METSAT-9(Cont.)
METSAT UNIQUE

METSAT.xls
03/13/1996

Connector, PCB	Ref/Qty	Description		Active Pins	Avg. Gauge	Avg. Current	Temp. Rise	Quality		Mate / Unmate			
1337748-1	P1	Connector		39	26	0.1	0.03	Mil		Per 1000 hours			
Interconnection Assemblies with Plated Through Holes													
Part Number	Ref/Qty	Description		Layers	Quality		Wave Solder	Hand Solder					
1337312-1	1	PWB, Parallel to Ser Cnvr		4	Mil	PTHs->	527						

TABLE A2ES-METSAT-10
METSAT UNIQUE

METSAT.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate π_T</u>	<u>π_E</u>	<u>π_Q</u>	<u>π_L</u>	<u>C_1</u>	<u>C_2</u>	
AS8322/30302SCA	U1	Triple 3-Input NOR	0.00117	0.2275	0.5	0.25	1	0.0048	
AS8322/11005SCX	U2	Quadruple Op. Amp.	0.00117	0.2275	0.5	0.25	1	0.0048	
AS8322/11404SGX	U8, U9	JFET Input Op. Amp.	0.00151	0.2275	0.5	0.25	1	0.0015	

Diodes	<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_T</u>	<u>π_S</u>	<u>π_C</u>	<u>π_E</u>
	AS8301-1N41481S	CR1, CR2, CR7	Switching Diode	0.00008	0.001	1.4004	0.054	1
	AS8301-1N41481S	CR3, CR8	Switching Diode	0.00005	0.001	1.4004	0.054	1
	AS8301-1N41481S	CR4, CR6, CR9, CR11	Switching Diode	0.00011	0.001	1.4004	0.054	1
	AS8301-1N41481S	CR5, CR10	Switching Diode	0.00005	0.001	1.4004	0.054	1
	AS8301-1N41481S	CR12, CR13	Switching Diode	0.00005	0.001	1.4004	0.054	1
	AS8301-1N41481S	CR14, CR15	Switching Diode	0.00005	0.001	1.4004	0.054	1
	AS8301-1N41481S	CR16 (-1 only)	Switching Diode	0.00003	0.001	1.4004	0.054	1
	AS8301-1N41481S	CR17, CR18	Switching Diode	0.00005	0.001	1.4004	0.054	1
	AS8301-1N5417-S	CR19, CR20	Switching Diode	0.00009	0.001	1.4004	0.0912	1
	AS8301-IN759A1S	Zener Diode, Vz=12.0		0.00086	0.002	1.2333	1	0.5

Transistors, Low Frequency, Bipolar									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_T</u>	<u>π_A</u>	<u>π_R</u>	<u>π_S</u>	<u>π_Q</u>	<u>π_E</u>
AS8302-2N2222AS	Q1, Q3, Q5, Q7	NPN General Purpose	0.00024	0.0007	1.6968	0.7	0.7125	0.2745	0.7
AS8302-2N2222AS	Q2, Q4, Q6, Q8	NPN General Purpose	0.00024	0.0007	1.6968	0.7	0.7125	0.2745	0.5
AS8302-2N2222AS	Q9, Q10, Q11	NPN General Purpose	0.00012	0.0007	1.6968	0.7	0.7125	0.2745	0.7
AS8302-2N2222AS	Q11 (-1 only)	NPN General Purpose	0.00006	0.0007	1.6968	0.7	0.7125	0.2745	0.5
AS8302-2N2222AS	Q12	NPN General Purpose	0.00006	0.0007	1.6968	0.7	0.7125	0.2745	0.7
AS8302-2N2907AS	Q13, Q14	PNP General Purpose	0.00010	0.0007	1.6018	0.7	0.6560	0.2745	0.7
AS8302-2N2907AS	Q15, Q17	PNP General Purpose	0.00010	0.0007	1.6018	0.7	0.6560	0.2745	0.7
AS8302-2N2907AS	Q16, Q18	PNP General Purpose	0.00010	0.0007	1.6018	0.7	0.6560	0.2745	0.5

Optoelectronics	<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_T</u>	<u>π_Q</u>	<u>π_E</u>
26045-1	U3, U4	Optical Coupler	0.00007	0.013	0.0003	0.7	13
26045-1	U5, U6	Optical Coupler	0.00007	0.013	0.0003	0.7	13
26045-1	U7 (-1 only)	Optical Coupler	0.00003	0.013	0.0003	0.7	13

Resistors, Fixed, Composition									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_T</u>	<u>π_R</u>	<u>π_Q</u>	<u>π_E</u>		
RCR05G102JS	R1, R5	1K, 0.125W, Est. Rel.	0.00001	0.0006	1	0.03	0.2		
RCR05G102JS	R2, R4, R6, R8	1K, 0.125W, Est. Rel.	0.00002	0.0006	1	0.03	0.2		
RCR05G102JS	R3, R7	1K, 0.125W, Est. Rel.	0.00001	0.0006	1	0.03	0.2		
RCR05G102JS	R9, R10	1K, 0.125W, Est. Rel.	0.00001	0.0007	1	0.03	0.2		

TABLE A2ES-METSAT-10 (Cont.)
METSAT UNIQUE

METSAT.xls
03/13/1996

<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_R</u>	<u>π_Q</u>	<u>π_E</u>
RCR05G104JS	R11, R13, R15, R17	100K, 0.125W, Est. Rel.	0.00002	0.0006	1.1	0.03
RCR05G104JS	R12, R14, R16, R18	100K, 0.125W, Est. Rel.	0.00002	0.0006	1.1	0.03
RCR05G512JS	R19, R20	5.1K, 0.125W, Est. Rel.	0.00001	0.0007	1	0.03
RCR05G512JS	R21	5.1K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G512JS	R22	5.1K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G512JS	R23	5.1K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G512JS	R24 (-1 only)	5.1K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G512JS	R25, R26	10K, 0.125W, Est. Rel.	0.00001	0.0007	1	0.03
RCR05G103JS	R27	10K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G103JS	R28	10K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G103JS	R29	10K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G103JS	R30	10K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G103JS	R31 (-1 only)	10K, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G103JS	R32	100, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G101JS	R33	100, 0.125W, Est. Rel.	3.9E-06	0.0006	1	0.03
RCR05G101JS	R34-R37	100, 0.125W, Est. Rel.	0.00002	0.0006	1	0.03
RCR20G202JS	R38	2K, 0.5W, Est. Rel.	0.00001	0.0009	1	0.03
RCR05G202JS	R39, R40	2K, 0.125W, Est. Rel.	0.0001	0.0007	1	0.03
RCR05G202JS	R41 (-1 only)	2K, 0.125W, Est. Rel.	4.0E-06	0.0007	1	0.03
RCR05G202JS	R42, R43	2K, 0.125W, Est. Rel.	0.00001	0.0006	1	0.03
RCR05G106JS	R44, R45	10M, 0.125W, Est. Rel.	0.00002	0.0006	2.5	0.03
Resistors, Fixed, Film						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_R</u>	<u>π_Q</u>	<u>π_E</u>
RNC50J1002FS	R46, R48	10K, 0.05W	0.00001	0.0006	1	0.03
RNC50J1002FS	R47, R49	10K, 0.05W	0.00001	0.0006	1	0.03
RNC50J2002FS	R50, R51	10K, 0.05W	0.00001	0.0006	1	0.03
RNC50J1003FS	R52, R53	100K, 0.05W	0.00001	0.0006	1.1	0.03
RNC55J2263FS	R54, R55	226K, 0.1W	0.00001	0.0006	1.1	0.03
RNC55J2803FS	R56, R57	280K, 0.1W	0.00001	0.0006	1.1	0.03
RNC55J1004FS	R58, R59	1M, 0.1W	0.00001	0.0006	1.6	0.03
RNC50J2002FS	R60, R63	10K, 0.05W	0.00001	0.0006	1	0.03
RNC50J2002FS	R61, R62	10K, 0.05W	0.00001	0.0006	1	0.03
Capacitors, Fixed, Ceramic, General Purpose						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_CV</u>	<u>π_Q</u>	<u>π_E</u>
M123A02BXC104KC	C7-C12	0.1uF, 100V, Est. Rel.	0.00008	0.0007	1.45E-04	0.03
Capacitors, Fixed, Electrolytic, Tantalum, Solid						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate λ_b</u>	<u>π_CV</u>	<u>π_Q</u>	<u>π_E</u>
M39003/01-8194	C1	1.0uF, 50V, Est. Rel.	0.00002	0.0048	1	0.33
M39003/01-8194	C2, C3	1.0uF, 50V, Est. Rel.	0.00004	0.0047	1	0.33

TABLE A2ES-METSAT-10 (Cont.)
METSAT UNIQUE

TABLE A2ES-METSAT-10 (Cont.)
METSAT UNIQUE

Microcircuits, Gate/Logic Arrays and Microprocessors									
Part Number	Ref/Qty	Description	Compl.	Tech.	E _a	θ _{jc}	Actual Temp.	Actual Watts	Mfr.
AS8322/30302SCA	U1	Triple 3-Input NOR	32	Linear	0.65	20	35.00	14	Hermetic Can
AS8322/11005SCX	U2	Quadruple Op. Amp.	13	Linear	0.65	20	35.00	14	Hermetic Can
AS8322/11404SGX	U8, U9	JFET Input Op. Amp.	29	Linear	0.65	23	35.00	7	2

Diodes									
Part Number	Ref/Qty	Description	Contact	Type/App	Rated Voltage	θ _j	Actual Watts	Case ("C/W)	Quality
AS8301-1N41481S	CR1, CR2, CR7	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N41481S	CR3, CR8	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N41481S	CR4, CR6, CR9, CR11	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N41481S	CR5, CR10	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N41481S	CR12, CR13	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N41481S	CR14, CR15	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N41481S	CR16 (-1 only)	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N41481S	CR17, CR18	Switching Diode	Metal Switch	75	35.00	120	DO-35	JANTXV	
AS8301-1N5417-S	CR19, CR20	Switching Diode	Metal V. Ref.	75	28	35.00	10	DO-35	JANTXV
AS8301-1N7591AS	VR1	Zener Diode, V _Z =12.0	Metal V. Ref.	-	35.00	200	DO-35	JANTXV	

Transistors, Low Frequency, Bipolar									
Part Number	Ref/Qty	Description	Case	θ _{jc} ("C/W)	Temp.	θ _{je}	Actual Power	Rated Power	VCE Appl. [Vn/Sw] Quality
AS8302-2N2222AS	Q1, Q3, Q5, Q7	NPN General Purpose	TO-18	70	49.00	0.4	60	35	Sw JANTXV
AS8302-2N2222AS	Q2, Q4, Q6, Q8	NPN General Purpose	TO-18	70	49.00	0.4	60	35	Sw JANTXV
AS8302-2N2222AS	Q9, Q10, Q11	NPN General Purpose	TO-18	70	49.00	0.4	60	35	Sw JANTXV
AS8302-2N2222AS	Q11 (-1 only)	NPN General Purpose	TO-18	70	49.00	0.4	60	35	Sw JANTXV
AS8302-2N2222AS	Q12	NPN General Purpose	TO-18	70	49.00	0.4	60	35	Sw JANTXV
AS8302-2N2907AS	Q13, Q14	PNP General Purpose	TO-18	70	46.20	0.32	60	35	Sw JANTXV
AS8302-2N2907AS	Q15, Q17	PNP General Purpose	TO-18	70	46.20	0.32	60	35	Sw JANTXV
AS8302-2N2907AS	Q16, Q18	PNP General Purpose	TO-18	70	46.20	0.32	60	35	Sw JANTXV

Optoelectronics									
Part Number	Ref/Qty	Description	θ _{jc} ("C/W)	Temp.	Power	θ _{je}	Actual Power	Power	Package Quality
26045-1	U3, U4	Optical Coupler	70	35.35	0.196	0.005	70-99	JANTXV	
26045-1	U5, U6	Optical Coupler	70	35.35	0.196	0.005	70-99	JANTXV	
26045-1	U7 (-1 only)	Optical Coupler	70	35.35	0.196	0.005	70-99	JANTXV	

Resistors, Fixed, Composition									
Part Number	Ref/Qty	Description	θ _{jc}	Power	θ _{je}	Actual Power	Power	Quantity	
R1, R5	1K, 0.125W, Est. Rel.		1000	0.125				S	
R2, R4, R6, R8	1K, 0.125W, Est. Rel.		1000	0.125				S	
R3, R7	1K, 0.125W, Est. Rel.		1000	0.125				S	
R9, R10	1K, 0.125W, Est. Rel.		1000	0.125				S	

March 1996

Report 9831C
March 1996

Part Number: 1356911

Relay Driver and Current Monitor Circuit Card Assembly

Schematic: 1356912

TABLE A2ES-METSAT-10 (Cont.)
METSAT UNIQUE

METSAT XLS
03/13/1996

METSAT UNIQUE					
Resistors, Fixed, Film					
Part Number	Ref/Qty	Description	Rated Ohms	Actual Power	Actual Quantity
RNC50J1002FS	R46, R48	10K, 0.05W	10000	0.05	S
RNC50J1002FS	R47, R49	10K, 0.05W	10000	0.05	S
RNC50J2002FS	R50, R51	10K, 0.05W	20000	0.05	S
RNC50J1003FS	R52, R53	100K, 0.05W	100000	0.05	S
RNC55J2263FS	R54, R55	226K, 0.1W	226000	0.1	S
RNC55J2803FS	R56, R57	280K, 0.1W	280000	0.1	S
RNC55J1004FS	R58, R59	1M, 0.1W	1000000	0.1	S
RNC50J2002FS	R60, R63	10K, 0.05W	20000	0.05	S
RNC50J2002FS	R61, R62	10K, 0.05W	20000	0.05	S
Capacitors, Fixed, Ceramic, General Purpose					
Part Number	Ref/Qty	Description	pF	Rated Voltage	Actual Voltage
M123A02BXC104KC	C7-C12	0.1uF, 100V, Est. Rel.	100000	125	100
Capacitors, Fixed, Electrolytic, Tantalum, Solid					
Part Number	Ref/Qty	Description	uF	Rated Voltage	Actual Voltage
M39003/01-8194	C1	1.0uF, 50V, Est. Rel.	1.0	85	50
M39003/01-8194	C2, C3	1.0uF, 50V, Est. Rel.	1.0	85	50

Part Number: 1356911

Relay Driver and Current Monitor Circuit Card Assembly

Schematic: 1356912

METSAT.xls
03/13/1996

METSAT UNIQUE

Connector, PCB		<u>Ref/Qty</u>	<u>Description</u>	<u>Pin</u>	<u>Avg.</u>	<u>Temp.</u>	<u>Mate / Unmate</u>
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Gauge</u>	<u>Current</u>	<u>Rise</u>	<u>Quality</u>	<u>per 1000 hours</u>
M39003/01-8194	C4	1	1.0uF, 50V, Est. Rel.	1.0	85	50	12
M39003/01-8282	C5, C6		3.3uF, 75V, Est. Rel.	3.3	85	75	28
M39003/01-8078	C13, C14		10uF, 20V, Est. Rel.	10	85	20	5
Interconnection Assemblies with Plated Through Holes							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Layers</u>	<u>Quality</u>	<u>Wave Solder</u>	<u>Hand Solder</u>	
1337748-1	P1	Receptacle, 92-Contact	43	0.1	0.03	0.5	
Part Number							
1356911-1	1 (-1 Assembly)	PWB, Relay Dvr & Cur Man	6	<u>MN</u>	<u>PTHs-></u>	<u>416</u>	
1356911-1	1 (-2 Assembly)	PWB, Relay Dvr & Cur Man	6	<u>MN</u>	<u>PTHs-></u>	<u>405</u>	

**Table A2ES-EOS Module A2
Electronics Subsystem (ES)**

Nomenclature	Part Number	Quantity (n)	λ (f/10 ⁶ hr)	nλ	λ Source/Remarks
DC-to-DC Converter	1356010-1	1	0.38243	0.38243	AE-26577
Detector/Preamp Assembly	1331300-1	1	0.04339	0.04339	Table A2ES-EOS-1
Power Control Monitoring Assy	1356760-1	1	0.28827	0.28827	Table A2ES-EOS-2 equals P/N 1356002. Other misc. has no reliability impact.
Cables					
Spacecraft Power (W1)	1356431-1	1	0.04440	0.04440	Table A2ES-EOS-21
Power In (W2)	1356432-1	1	0.08274	0.08274	Table A2ES-EOS-3
Scan Drive (W3)	1356433-1	1	0.06038	0.06038	Table A2ES-EOS-4
Clock and PRT (W4)	1356434-1	1	0.06382	0.06382	Table A2ES-EOS-5
Warm Load (W5)	1356816-1	1	0.012961	0.12961	Table A2ES-EOS-6
Extender (W6)	1356817-1	1	0.00204	0.00204	Table A2ES-EOS-22
Extender (W7)	1356818-1	1	0.00710	0.00710	Table A2ES-EOS-23
Extender (W8)	1356819-1	1	0.00241	0.00241	Table A2ES-EOS-24
Signal Processing Assembly (1356439-1)					
Temp Sensor "A" CCA	1338421	1	0.03278	0.03278	Table A2ES-EOS-7
Temp. Sensor Analog MUX CCA	1331688	1	0.00914	0.00914	Table A2ES-EOS-8
Analog MUX and A-D Converter CCA	1356418	1	0.03684	0.03684	Table A2ES-EOS-9
Integrate and Dump Filter CCA	1338424	1	0.01269	0.01269	Table A2ES-EOS-10
MIL-STD-1553 Interface CCA	1355998	1	0.15342	0.15342	Table A2ES-EOS-11
Timing Control CCA	1331135	1	0.02884	0.02884	Table A2ES-EOS-12
CPU CCA	1356413	1	0.02334	0.02334	Table A2ES-EOS-13
Memory CCA	1331126	1	0.01542	0.01542	Table A2ES-EOS-14
Scan Drive Electronics					
Scan Control Interface CCA	1331129	1	0.00731	0.00731	Table A2ES-EOS-15
MUX Relay CCA	1356000	1	0.02586	0.02586	Table A2ES-EOS-16
Interface/Converter CCA	1331697	1	0.03492	0.03492	Table A2ES-EOS-17
Resolver-Data Isolator CCA	1334972	1	0.01716	0.01716	Table A2ES-EOS-18
R-D Converter/Oscillator CCA	1337739	1	0.08332	0.08332	Table A2ES-EOS-19
Motor Driver CCA	1331694-2	1	0.03874	0.03874	Table A2ES-EOS-20

Total A2ES-EOS $\lambda = 1.62637$

TABLE A2ES-EOS-1

Environment: SF

Temperature: 30°C

Part Number	Description	Failure Rate	
		A2	Unit
1331074-3	CCA, 2-Channel Video Preamp	1	0.01166 0.01166
1331577-2	Detector, RF	2	0.01765 0.03530
AS8052-1	Connector	2	0.008 0.016
AS8385-55-3007	SMA Connectors	2	0.003 0.006
AS8137-2A204	Connector	2	0.008 0.016
311P10-2P-C-15	Connecor	2	0.008 0.016

A2 Module: 0.04696

TABLE A2 ESS-EOS-2

Part Number	Description	Failure Rate		
		Unit	1	0.28827
1356002	CCA, Power Control/Monitoring		1	0.28827
MS27742-1	Relay		2	0.0133
311P10-4P-C-12	Connector		1	0.008
AS8324-05-S	Filter		14	1.344

Total Failure Rate: 0.31493

TABLE A2ES-EOS-2

Diodes, Low Frequency		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{IS}</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>
<u>Part Number</u>			Switching Diode	0.00262	0.001	1.61815	0.289006	1	0.7
JAN5IN6642		CR1 - CR16		0.00259	0.001	1.233347	1	1	0.7
Optoelectronics									
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{IS}</u>	<u>Π_Q</u>	<u>Π_E</u>	
JANSIN49	U1 - U4		Optical Isolator	5.32E-06	0.013	0.000292	0.7	0.5	
Transistors, Low Frequency, Bipolar									
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{IS}</u>	<u>Π_Q</u>	<u>Π_E</u>	
JANSZN2222A	Q3, Q6		NPN General Purpose	0.00027	0.00074	5.383425	0.7	0.712463	0.191202
Transistors, Low Frequency, Si FET									
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{IS}</u>	<u>Π_Q</u>	<u>Π_E</u>	
JANSZN7272H	Q1, Q2, Q4, Q5		FET, Power	0.26370	0.012	3.924108	4	0.7	0.5
Resistors, Fixed, Composition, Established Reliability									
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{IS}</u>	<u>Π_Q</u>	<u>Π_E</u>	
RCR05G203JS	R1, R2, R10, R20		20K, 0.125W, 5%	3.29E-05	0.000548	1	0.03	0.5	
RCR05G392JS	R3, R4, R14, R15		3.9K, 0.125W, 1%	3.29E-05	0.000548	1	0.03	0.5	
RCR05G222JS	R9, R17		2.2K, 0.125W, 1%	1.64E-05	0.000548	1	0.03	0.5	
Resistors, Fixed, Film									
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{IS}</u>	<u>Π_Q</u>	<u>Π_E</u>	
RLR051001FS	R6, R12		1K, 1%, 0.125W	9.43E-06	0.000786	1	0.03	0.2	
RLR052001FS	R7, R13		2K, 1%, 0.125W	1.68E-05	0.001398	1	0.03	0.2	
RLR05C1102FS	R32		11K, 1%, 0.125W	3.90E-06	0.00065	1	0.03	0.2	
RLR05C1302FS	R33		13K, 1%, 0.125W	4.39E-06	0.000731	1	0.03	0.2	
RLR05C8061FS	R34		8.06K, 1%, 0.125W	4.14E-06	0.00069	1	0.03	0.2	
RLR05C1822FS	R35		18.2K, 1%, 0.25W	4.83E-06	0.000805	1	0.03	0.2	
RLR05C3011FS	R36		3.01K, 1%, 0.25W	4.83E-06	0.000805	1	0.03	0.2	
RLR05C1212FS	R37, R38		12.1K, 1%, 0.125W	7.94E-06	0.000662	1	0.03	0.2	

TABLE A2ES-EOS-2 (Cont.)

<u>Resistors, Network, Fixed, Film</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_T</u>	<u>Π_R</u>	<u>Π_Q</u>	<u>Π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>							
M8340101H1212FB	RN1	12.1K, 0.125W	0.00154	0.00006	4.661371	11	1	0.5
M8340101H1302FB	RN2	13K, 0.125W	0.00112	0.00006	4.661371	8	1	0.5
<u>Resistors, Fixed, Wirewound, Power</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_R</u>	<u>Π_Q</u>	<u>Π_E</u>	
<u>Part Number</u>	<u>Ref/Qty</u>							
RWR80S1R00FS	R25	1 ohm, 2W, 1%	0.00014	0.015764	1	0.03	0.3	
RWR80S1R50FS	R22-R24, R29-R31	1.5 ohm, 2W, 1%	0.00085	0.015764	1	0.03	0.3	
RWR80S1R332FS	R8	0.332 ohm, 2W, 1%	0.00014	0.015764	1	0.03	0.3	
RWR80S2R00FS	R18	2 ohm, 2W, 1%	0.00014	0.015764	1	0.03	0.3	
1331073-1	R19-R21, R26-R28	Kit, 2W, 1%	0.00085	0.015764	1	0.03	0.3	
<u>Connector, PCB</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_E</u>	
<u>Part Number</u>	<u>Ref/Qty</u>							
M83513/16-FOINP	J1	37 Pin	0.00112	0.000285	1.5	5.262599	0.5	
M24308/23-39	J2	25 Pin	0.00099	0.000285	1.5	4.618523	0.5	
M83513/16-DOINP	J3	37 Pin	0.00086	0.000285	1.5	4.00623	0.5	
M83513/19-AOINP	J4	25 Pin	0.00064	0.000285	1.5	2.996681	0.5	
M83513/17-GOINP	J5	9 Pin	0.00037	0.000285	1.5	1.717296	0.5	
	J6	51 Pin	0.00142	0.000285	1.5	6.658756	0.5	
<u>Interconnection Assemblies with Plated Through Holes</u>		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>	
<u>Part Number</u>	<u>Ref/Qty</u>							
135622-1	1	Printed Wiring Board	0.00877	1.7E-05	1.791697	1	0.5	N1 N2 576 0

Total Failure Rate: 0.288827

TABLE A2ES-EOS-2 (Cont.)

Diodes, Low Frequency		<u>Ref/Qty</u>	<u>Contact Metal</u>	<u>Type/App Switch V. Ref.</u>	<u>Rated Voltage</u>	<u>Junct. Temp.</u>	<u>Watts</u>	<u>qjc [°C/M]</u>	<u>Case DO-35</u>	<u>Quality JANTXV</u>
<u>Part Number</u>		CR1 - CR16	VR1 - VR6		75	45	0.45	10	TO-18	JANTXV
JANS1N6642				V. Ref.	40	24				
Optoelectronics										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>qjc [°C/M]</u>	<u>Junct.</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Package</u>	<u>Quality</u>			
JANS4N49	U1 - U4	70	51.8	0.4	0.24	T0-99	JANTXV			
Transistors, Low Frequency, Bipolar										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>qjc [°C/M]</u>	<u>Junct.</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Vceo</u>	<u>Appl. Applied</u>	<u>(Lin/Sw)</u>	<u>Case TO-18</u>	<u>Quality JANTXV</u>
JANS2N2222A	Q3, Q6	70	117.7	0.4	1.1816	60	28	Sw		
Transistors, Low Frequency, Si FET										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Appl. Type</u>	<u>qjc [°C/M]</u>	<u>Junct.</u>	<u>Rated Power</u>	<u>Power</u>	<u>Actual Power</u>	<u>Case TO-205</u>	<u>Quality JANTXV</u>	
JANS2N7272H	Q1, Q2, Q4, Q5	MOS	70	105	25	1				
Resistors, Fixed, Composition, Established Resis										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Ohms</u>								
RCR05G203JS	R1, R2, R10, R20	20000								
RCR05G392JS	R3, R4, R14, R15	3900								
RCR05G222JS	R9, R17	2200								
Resistors, Fixed, Film										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Ohms</u>								
RLR051001FS	R6, R12	1000								
RLR052001FS	R7, R13	2000								
RLR05C1102FS	R32	11000								
RLR05C1302FS	R33	13000								
RLR0C8061FS	R34	8060								
RLR05C1822FS	R35	18200								
RLR05C3011FS	R36	3010								
RLR05C1212FS	R37, R38	12100								

TABLE A2ES-EOS-2 (Cont.)

SIG PROC.XLS
03/13/1996

Resistors, Network, Fixed, Film		<u>Rated Power</u>	<u>Actual Power</u>	<u>Quality</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Ohms</u>	<u>Ohms</u>	<u>Mil</u>
M8340101H1212FB	RN1	12100	0.125	0.075
M8340101H1302FB	RN2	13000	0.125	0.075

Resistors, Fixed, Wirewound, Power		<u>Rated Power</u>	<u>Actual Power</u>	<u>Quality</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Ohms</u>	<u>Ohms</u>	<u>Mil</u>
RWR80S1R00FS	R25	1	2	1.2
RWR80S1R50FS	R22-R24, R29-R31	1.5	2	1.2
RWR80SR332FS	R8	0.332	2	1.2
RWR80S2R00FS	R18	2	2	1.2
1331073-1	R19-R21, R26-R28	10	2	1.2

Connector, PCB		<u>Active Pins</u>	<u>Avg. Current</u>	<u>Temp. Rise</u>	<u>Mate / Unmate per 1000 hours</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Gauge</u>	<u>Temp.</u>	<u>Quality</u>	<u>Mil</u>
M83513/16-FOINP	J1	28	0.1	0.03	0.5
M24308/23-39	J2	24	0.1	0.03	0.5
M83513/16-DOINP	J3	20	0.1	0.03	0.5
M83513/19-AOINP	J4	13	0.1	0.03	0.5
M83513/17-GOINP	J5	4	0.1	0.03	0.5
	J6	36	0.1	0.03	0.5

Interconnection Assemblies with Plated Through Holes		<u>Layers</u>	<u>Quality</u>	<u>PTHs-></u>	<u>Wave Solder</u>	<u>Hand Solder</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Mil</u>	<u>Mil</u>	<u>PTHs-></u>	<u>576</u>	<u>0</u>
1356422-1	1					

TABLE A2ES-EOS-3

EOS Part Number 1356432-1				METSAT Part Number 1357147			
Item No.	Qty Rqrd	Part Number	Nomenclature	Designation	Pins	Active	
1	1	1337653-2	CCA, I/O Interface	P324	39		
2	1	AS8096-25PLR0	Connector	P902	23		
3	1	AS8381-04-G04NA	Connector, 51 Pin, 26AWG Wire	P706	16		
Designation λ_p				πK	πP	πE	πQ
P324 Connector	0.00103	0.00057		1.0	7.22	0.50	0.1
Connections 0.0507		0.0026				0.50	1.0
P902 Connector	0.00063	0.00057		1.0	4.46	0.50	0.1
Connections 0.0299		0.0026				0.50	1.0
P706 Connector	0.00049	0.00057		1.0	3.42	0.50	0.1
Connections <u>0.0208</u>	<u>0.0026</u>	<u>0.08274</u>				0.50	1.0
Designation λ_b				πK	πP	πE	πQ
P324 Connector	0.00103	0.00057		1.0	7.22	0.50	0.1
Connections 0.0507		0.0026				0.50	1.0
P902 Connector	0.00063	0.00057		1.0	4.46	0.50	0.1
Connections 0.0299		0.0026				0.50	1.0
P706 Connector	0.00049	0.00057		1.0	3.42	0.50	0.1
Connections <u>0.0208</u>	<u>0.0026</u>	<u>0.08274</u>				0.50	1.0
Designation λ_p				πK	πP	πE	πQ
P324 Connector	0.00103	0.00057		1.0	7.22	0.50	0.1
Connections 0.0507		0.0026				0.50	1.0
P902 Connector	0.00063	0.00057		1.0	4.46	0.50	0.1
Connections 0.0299		0.0026				0.50	1.0
P706 Connector	0.00049	0.00057		1.0	3.42	0.50	0.1
Connections <u>0.0208</u>	<u>0.0026</u>	<u>0.08274</u>				0.50	1.0

TABLE A2ES-EOS-4

EOS Part Number 1356433-1

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Connections/Pins
1	1		1337653-3	CCA, I/O Interface	P325	33
2	1		1356784-2	Transistor Assy		33
3	1		311F409-3P-B-12	Connector, Sub-D	P702	13
4	1		AS8096-25SLRO	Connector, Sub-D	P101	20
Designation λp						
P325	0.00087	0.00057	1.0	πK	i_{AVG}	AWG
	0.0429	0.0026	6.12	πP	0.1	ΔT
				πE	0.01397	22
<i>Hand Solder, w/o Wrapping</i>						
Transistor Assy 0.00901 Connections 0.00231						
			(see assembly 1356784 failure rate calculations)			
		0.00014	0.00014	0.50	1.0	<i>Hand Solder, w/ Wrapping</i>
P702	0.00043	0.00057	1.0	πK	i_{AVG}	AWG
	0.00169	0.00026	3.00	πP	0.1	ΔT
				πE	0.01397	22
					<i>Crimp</i>	
P101	0.00057	0.00057	1.0	πK	i_{AVG}	AWG
	<u>0.0026</u>	<u>0.00026</u>	4.01	πP	0.1	ΔT
				πE	0.01397	22
		<u>0.06038</u>			<i>Crimp</i>	

EOS Part Number 1356434-1

TABLE A2ES-EOS-5

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Pins/Connections
1	1	1	1337653-3	CCA, I/O Interface	P301	23
2	1	1	AS8096-9SHR0	Connector, 9 Skt, HF Filter	J3	6
3	1	1	AS8096-9PHR0	Connector, 9 Pin, HF Filter	J5	7
4	1	1	AS8096-37SHR0	Connector, 37 Skt, HF Filter	J4	11
7	4	RCR42G560JS	Resistor, 56Ω, (R-39008)	R1-R4	8	
Designation $\frac{\Delta P}{\lambda b}$				$\frac{\pi K}{\lambda E}$	$\frac{\pi Q}{\lambda E}$	$\frac{\Delta T}{\lambda W G}$
P301 Connector	0.00063	0.00057	1.0	4.46	0.50	0.1
Connections	0.0299	0.0026			0.50	1.0
J3 Connector	0.00029	0.00057	1.0	2.02	0.50	0.1
Connections	0.0078	0.0026			0.50	1.0
Ground Lug	0.00026	0.00026			0.50	1.0
J5 Connector	0.00031	0.00057	1.0	2.16	0.50	0.1
Connections	0.0091	0.0026			0.50	1.0
J4 Connector	0.00039	0.00057	1.0	2.72	0.50	0.1
Connections	0.0143	0.0026			0.50	1.0
Ground Lug	0.00026	0.00026			0.50	1.0
Designation $\frac{\Delta P}{\lambda b}$				$\frac{\pi R}{\lambda E}$	$\frac{\pi Q}{\lambda E}$	$\frac{\Delta T}{\lambda W G}$
R1-R4 Connections	0.00003	0.00044	1.0	0.03	0.50	2
	0.00056	0.00014		1.0	0.50	0.56
	0.06382					
Designation $\frac{\Delta P}{\lambda b}$				$\frac{\pi R}{\lambda E}$	$\frac{\pi Q}{\lambda E}$	$\frac{\Delta T}{\lambda W G}$
Hand Solder, w/o Wrapping						
Hand Solder, w/ Wrapping						
Designation $\frac{\Delta P}{\lambda b}$				$\frac{\pi R}{\lambda E}$	$\frac{\pi Q}{\lambda E}$	$\frac{\Delta T}{\lambda W G}$
Hand Solder, w/o Wrapping						
Hand Solder, w/ Wrapping						

TABLE A2ES-EOS-6

EOS Part Number 1356816-1

TABLE A2ES-EOS-7

33 of 62

Microcircuits, Gate/Logic Arrays and Microprocessors			<u>Failure Rate</u>	<u>III</u>	<u>II</u>	<u>I</u>	<u>C1</u>	<u>C2</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	0.00847	0.240917	0.5	0.25	1	0.00196
M38510/10104SGX	10	Operational Amplifier	0.00848	0.241222	0.5	0.25	1	0.00196
M38510/10104SGX	10	Operational Amplifier	0.00113	0.353337	0.5	0.25	1	0.00196
M38510/11404SGX	U21	Operational Amplifier						
Resistors, Fixed, Film			<u>Failure Rate</u>	<u>λb</u>	<u>IR</u>	<u>IQ</u>	<u>IE</u>	
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	0.00016	0.000648	1	0.03	0.8	
RNC90Y3K7400TR	10	Est. Rel., 3.74K, 0.3W	0.00016	0.000648	1	0.03	0.8	
RNC90Y4K7000TR	10	Est. Rel., 4.70K, 0.3W	0.00016	0.000648	1	0.03	0.8	
RNC90Y3K6500TR	10	Est. Rel., 3.65K, 0.3W	0.00016	0.000648	1	0.03	0.8	
RNC90Y45K3000TR	10	Est. Rel., 45.3K, 0.3W	0.00026	0.000648	1.7	0.03	0.8	
RNC90Y1K00000TR	10	Est. Rel., 1.00K, 0.3W	0.00016	0.000648	1	0.03	0.8	
RNC90Y45K3000TR	10	Est. Rel., 45.3K, 0.3W	0.00026	0.000648	1.7	0.03	0.8	
RNC90Y45K3000TR	10	Est. Rel., 45.3K, 0.3W	0.00026	0.000648	1.7	0.03	0.8	
RNC90Y45K3000TR	10	Est. Rel., 45.3K, 0.3W	0.00026	0.000648	1.7	0.03	0.8	
RNC90Y45K3000TR	10	Est. Rel., 45.3K, 0.3W	0.00026	0.000648	1.7	0.03	0.8	
RNC90Y1K0000TR	R81	Est. Rel., 1.00K, 0.3W	2.60E-05	0.001081	1	0.03	0.8	
RNC90Y123R00TR	R82	Est. Rel., 123, 0.3W	1.66E-05	0.00069	1	0.03	0.8	
RNC90Y110R00TR	R83	Est. Rel., 110, 0.3W	1.57E-05	0.000655	1	0.03	0.8	
Capacitors, Fixed, Ceramic, General Purpose			<u>Failure Rate</u>	<u>λb</u>	<u>ICV</u>	<u>IQ</u>	<u>IE</u>	
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	5.71E-05	0.000699	0.680431	0.03	0.4	
M39014/01-1339	10	Est. Rel., 100pF, 200V	5.71E-05	0.000699	0.680431	0.03	0.4	
M39014/01-1339	10	Est. Rel., 100pF, 200V	5.71E-05	0.000699	0.680431	0.03	0.4	
M39014/01-1575	C33,C35	Est.Rel., 0.1 uF, 100V	2.44E-05	0.000699	1.454735	0.03	0.4	
Capacitors, Fixed, Electrolytic, Tantalum, Solid			<u>Failure Rate</u>	<u>λb</u>	<u>ICV</u>	<u>IQ</u>	<u>IE</u>	
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	0.00041	0.00469	1.099235	0.33	0.3	
M39003/01-8073	20	Est. Rel., 2.2uF, 20V	0.00041	0.00469	1.099235	0.33	0.3	
M39003/01-8111	C32	Est. Rel., 22uF, 50V	3.23E-05	0.005631	1.449075	0.33	0.3	
M39003/01-8111	C34	Est. Rel., 22uF, 50V	6.07E-05	0.010571	1.449075	0.33	0.3	
Connector, PCB			<u>Failure Rate</u>	<u>λb</u>	<u>IK</u>	<u>IP</u>	<u>IE</u>	
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	0.00378	0.000285	1.5	17.69336	0.5	
1337748-1	P1	Receptacle, 92-Contact						

Report 9831C
March 1996

TABLE A2ES-EOS-7 (Cont.)

34 of 62

Interconnection Assemblies with Plated Through Holes			
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>
1338422	1	Printed Wiring Board	0.00854
			1.7E-05

Total Failure Rate: 0.03278

Report 9831C
March 1996

TABLE A2ES-EOS-7 (Cont.)

35 of 62

Microcircuits, Gate/Logic Arrays and Microprocessors		<u>Comp.</u>	<u>Tech.</u>	<u>E_a</u>	<u>Junct.</u>	<u>θ_{jc}</u>	<u>Mfr</u>	<u>Pins</u>	<u>Years</u>	<u>Package</u>	<u>Quality</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>29</u>	<u>Linear</u>	<u>0.65</u>	<u>35.72</u>	<u>0.0181</u>	<u>40</u>	<u>8</u>	<u>>2</u>	<u>Can</u>
M38510/10104SGX	10	Operational Amplifier	29	Linear	0.65	35.74	0.0185	40	8	>2	Can
M38510/10104SGX	10	Operational Amplifier	29	Linear	0.65	40.64	0.141	40	8	>2	Can
M38510/11404SGX	U21	Operational Amplifier	29	Linear	0.65	40.64	0.141	40	8	>2	Can
Resistors, Fixed, Film											
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Ωhms</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Quality</u>					
RNC90Y3K7400TR	10	Est. Rel., 3.74K, 0.3W	4190	0.1	0.000044	S					
RNC90Y4K7000TR	10	Est. Rel., 4.70K, 0.3W	4700	0.1	0.00004	S					
RNC90Y3K6500TR	10	Est. Rel., 3.65K, 0.3W	4650	0.1	0.00004	S					
RNC90Y45K300TR	10	Est. Rel., 45.3K, 0.3W	45300	0.1	0.00004	S					
RNC90Y1K0000TR	10	Est. Rel., 1.00K, 0.3W	204	0.1	0.000001	S					
RNC90Y45K300TR	10	Est. Rel., 45.3K, 0.3W	45300	0.1	0.00004	S					
RNC90Y45K300TR	10	Est. Rel., 45.3K, 0.3W	45300	0.1	0.000001	S					
RNC90Y45K300TR	10	Est. Rel., 45.3K, 0.3W	45300	0.1	0.000001	S					
RNC90Y1K0000TR	R81	Est. Rel., 1.00K, 0.3W	1000	0.1	0.0462	S					
RNC90Y123R00TR	R82	Est. Rel., 123, 0.3W	123	0.1	0.0057	S					
RNC90Y110R00TR	R83	Est. Rel., 110, 0.3W	100	0.1	0.001	S					
Capacitors, Fixed, Ceramic, General Purpose											
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>pF</u>	<u>Rated Temp.</u>	<u>Actual Voltage</u>	<u>Voltage</u>					
M39014/01-1339	10	Est. Rel., 100pF, 200V	100	85	200	1	S				
M39014/01-1339	10	Est. Rel., 100pF, 200V	100	85	200	1	S				
M39014/01-1575	C33,C35	Est.Rel., 0.1 uF, 100V	100000	85	100	0.1	S				
Capacitors, Fixed, Electrolytic, Tantalum, Solid											
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>μF</u>	<u>Rated Temp.</u>	<u>Actual Voltage</u>	<u>Voltage</u>					
M39003/01-8073	20	Est. Rel., 2.2uF, 20V	2.2	85	20	0.5	S				
M39003/01-8111	C32	Est. Rel., 22uF, 50V	22	85	35	8.2	S				
M39003/01-8111	C34	Est. Rel., 22uF, 50V	22	85	35	15.1	S				
Connector, PCB											
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Active Pins</u>	<u>Avg. Gauge</u>	<u>Current</u>	<u>Temp. Rise</u>	<u>Quality</u>	<u>Mate / Unmate</u>	<u>per 1000 hours</u>		
1337748-1	P1	Receptacle, 92-Contact	80	26	0.1	0.03	M	0.5	0.5		

TABLE A2ES-EOS-7 (Cont.)

36 of 62

Interconnection Assemblies with Plated Through Holes						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Layers</u>	<u>Quality</u>	<u>Wave Solder</u>	<u>Hand Solder</u>
1338422	1	Printed Wiring Board	6	Mill	PTHs-> 500	0

TABLE A2ES-EOS-8

Microcircuits, Gate/Logic Arrays and Microprocessors		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
26043-14	U1-U3	Analog Multiplexer
M38510/10104SGX	U4, U5	Operational Amplifier
Diodes, Low Frequency		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
JANS1N4148-1	CR1	Switching Diode
26042-829-1	VR1	Zener Diode, 6.2V @ 7.5mA
Transistors, Low Frequency, Bipolar		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
26041-3700	Q1	Medium Power NPN
Resistors, Fixed, Composition		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
RCR07G473JS	R1	47K, 5%, 0.25W
Resistors, Fixed, Film		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
RNC50J82R2FS	R2	82.2 ohms, 1%, 0.05W
RNC50J1001FS	R3	1K, 1%, 0.05W
RNC50J1002FS	R4	10K, 1%, 0.05W
RNC55J1472FS	R7	14.7K, 1%, 0.05W
Resistors, Fixed, Wirewound, Power		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
AS8089-14A	R5	22.6K, 1%, 0.1W
AS8089-14B	R6	45.3K, 1%, 0.1W
RWR81S1500FS	R8	150 ohms, 5%, 1W
Capacitors, Fixed, Ceramic, General Purpose		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M39014/01-1320	C1, C6	Est. Rel. 33pF, 200V
M39014/01-1575	C2, C4	Est. Rel. 0.01uF, 100V

TABLE A2ES-EOS-8 (Cont.)

SIG_PROC.xls
03/13/1996

Capacitors, Fixed, Electrolytic, Tantalum, Solid		
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>
M39003/01-8111	C3, C5	Est. Rel., 22uF, 35V
 Connector, PCB		
<u>Ref/Qty</u>	<u>Description</u>	
1337748-1	P1	Receptacle, 92-Contact
 Interconnection Assemblies with Plated Through Holes		
<u>Part Number</u>	<u>Ref/Qty</u>	
1337641-1	1	Printed Wiring Board

<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{CV}</u>	<u>Π_{SR}</u>	<u>Π_Q</u>	<u>Π_E</u>
0.00012	0.010455	1.449075	0.33	0.03	0.4

<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_E</u>
0.00344	0.000285	1.5	16.10043	0.5

Total Failure Rate: 0.00914

TABLE A2ES-EOS-8 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors			<u>Ref/Qty</u>	<u>Description</u>	<u>Compl.</u>	<u>Tech.</u>	<u>E_a</u>	<u>Junct.</u>	<u>θ_{jc}</u>	<u>Years</u>	<u>Mfrd</u>	<u>Package</u>	<u>Quality</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>U1-U3</u>	<u>Analog Multiplexer</u>	<u>421</u>	<u>Linear</u>	<u>0.35</u>	<u>35.36</u>	<u>0.018</u>	<u>28</u>	<u>>2</u>	<u>Hermetic</u>	<u>S</u>	
26043-14		U4, U5	Operational Amplifier	29	Linear	0.65	35.72	0.018	40	7	>2	Can	S
M38510/10104SGX													
Diodes, Low Frequency	Part Number	Ref/Qty	Description	Contact	Type/App	Voltage	Rated	Applied	Junct.	Actual	θ_{jc}	Case	Quality
JANS1N4148-1	CR1		Switching Diode	Metal	Switch	75	20	35.10	0.01	10	DO-35	JANTXV	
26042-829-1	VR1		Zener Diode, 6.2V @ 7.5mA	Metal	V. Ref.	n/a	n/a	35.47	0.0465	10	DO-35	JANTXV	
Transistors, Low Frequency, Bipolar	Part Number	Ref/Qty	Description	θ_{jc}	Junct.	Rated	Actual	V_{ce}	Rated	Appl.	Case	Quality	
26041-3700	Q1		Medium Power NPN	70	Temp.	Power	Power	V _{ceo}	Power	(Un/Sw)	TO-18	JANTXV	
Resistors, Fixed, Composition	Part Number	Ref/Qty	Description	Ohms	Quality	Rated	Actual	V_{ceo}	Rated	Appl.	Case	Quality	
RCR07G473JS	R1	47K, 5%, 0.25W		47000	S	0.25	0.015	8.2	80	(Un/Sw)	TO-18	JANTXV	
Resistors, Fixed, Film	Part Number	Ref/Qty	Description	Ohms	Quality	Rated	Actual	V_{ceo}	Rated	Appl.	Case	Quality	
RNC50J82R2FS	R2	82.2 ohms, 1%, 0.05W		82.2	S	0.05	0.00462						
RNC50J1001FS	R3	1K, 1%, 0.05W		1000	S	0.05	0.00038						
RNC50J1002FS	R4	10K, 1%, 0.05W		10000	S	0.05	0.00038						
RNC55J1472FS	R7	14.7K, 1%, 0.05W		14700	S	0.1	5.88E-14						
Resistors, Fixed, Wirewound, Power	Part Number	Ref/Qty	Description	Ohms	Quality	Rated	Actual	V_{ceo}	Rated	Appl.	Case	Quality	
AS8089-14A	R5	22.6K, 1%, 0.1W		22600	S	0.1	0.00102						
AS8089-14B	R6	45.3K, 1%, 0.1W		45300	S	0.1	0.00051						
RWR81S1500FS	R8	150 ohms, 5%, 1W		150	S	1	0.5						
Capacitors, Fixed, Ceramic, General Purpose	Part Number	Ref/Qty	Description	pF	Quality	Rated	Actual	V_{ceo}	Rated	Appl.	Case	Quality	
M39014/01-1330	C1, C6	Est. Rel., 33pF, 200V		33	S	85	200						
M39014/01-1575	C2, C4	Est. Rel., 0.01uF, 100V		10000	S	85	100						

TABLE A2ESEOS-8 (Cont.)

SIG_PROC.xls
03/13/1996

Capacitors, Fixed, Electrolytic, Tantalum, Solid			<u>Ref/Qty</u>	<u>Description</u>	<u>UF</u>	<u>Quality</u>	<u>Temp.</u>	<u>Rated Temp.</u>	<u>Actual Voltage</u>
<u>Part Number</u>	<u>C3, C5</u>	<u>Est. Rel., 22uF, 35V</u>							
M39003/01-8111									
Connector, PCB									
1337748-1	<u>P1</u>	<u>Receptacle, 92-Contact</u>			<u>Active Pins</u>	<u>Avg. Gauge</u>	<u>Temp. Current</u>	<u>Rise</u>	<u>Qualify</u>
					<u>75</u>	<u>26</u>	<u>0.1</u>	<u>0.03</u>	<u>Mil</u>
									<u>Mate / Unmate per 1000 hours</u>
									<u>0.5</u>
Interconnection Assemblies with Plated Through Holes									
Part Number	<u>Ref/Qty</u>	<u>Printed Wiring Board</u>			<u>Layers</u>	<u>Quality</u>	<u>PTHs-></u>	<u>Wave Solder</u>	<u>Hand Solder</u>
1337641-1	1				4	<u>Mil</u>	228	0	

Total Failure Rate:

TABLE A2ES-EOS-9

Microcircuits, Gate/Logic Arrays and Microprocessors					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>IE</u>	<u>C1</u>
26149-1	U1	Voltage Regulator	0.00067	0.255	0.01
26149-2	U2	Voltage Regulator	0.00077	0.2959	0.01
26149-3	U3	2.5V Reference Diode	0.00062	0.2348	0.0003
26149-7	U4	Operational Amplifier	0.00084	0.2612	0.01
26149-7	U5	Operational Amplifier	0.00084	0.2612	0.0015
26043-14	U6	16 Channel MUX/DeMUX	0.00175	0.1882	0.0102
26149-7	U7	Operational Amplifier	0.00077	0.2316	0.0015
26123-1	U8	16 Bit A/D Converter	0.00200	0.1882	0.015
AS8083-08	U9	Hex Schmitt Trigger	0.00108	0.1882	0.0048
M38510/05255SCX	U10	Quad NOR Gate	0.00108	0.1882	0.0048
Diodes, Low Frequency					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>IE</u>	<u>C1</u>
JANS1N5615	CR1, CR2	Rectifier, Power	0.00024	0.054	0.5
26042-4573A	CR3, CR4	Temp. Comp. Zener	2.62E-05	1.869	0.5
JANS1N4148-1	CR5	Switching Diode	1.36E-06	0.001	0.5
Transistors, Low Frequency, Bipolar					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>IE</u>	<u>C1</u>
JANS2N2222A	Q1, Q2, Q7	NPN General Purpose	3.10E-05	1.4146	0.7
JANS2N2907A	Q3-Q6	PNP General Purpose	2.86E-05	1.4146	0.656
JANS2N2907A	Q8	PNP General Purpose	1.06E-05	1.2738	0.656
26041-3811	Q9	Dual Transistor (2N3811)	4.97E-05	0.0007	0.5987
Resistors, Fixed, Composition					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>IE</u>	<u>C1</u>
RCR05G101JS	R1, R2	Est. Rel., 100, 0.125W	4.32E-06	0.0007	0.03
RCR05G101JS	R3-R6	Est. Rel., 0, 0.125W	4.46E-06	0.0007	0.03
RCR05G102JS	R8, R24	Est. Rel., 1K, 0.125W	4.31E-06	0.0007	0.03
RCR05G104JS	R9	Est. Rel., 100K, 0.125W	4.74E-06	0.0007	0.03
RCR05G561JS	R10	Est. Rel., 560, 0.125W	4.38E-06	0.0007	0.03
RCR05G332JS	R11	Est. Rel., 3.3K, 0.125W	4.38E-06	0.0007	0.03
RCR05G100JS	R12	Est. Rel., 10, 0.125W	4.33E-06	0.0007	0.03
RCR05G100JS	R13, R14	Est. Rel., 10, 0.125W	4.33E-06	0.0007	0.03
RCR05G512JS	R15	Est. Rel., 5.1K, 0.125W	4.31E-06	0.0007	0.03
RCR05G133JS	R23	Est. Rel., 13K, 0.125W	4.79E-06	0.0008	0.03
RCR05G472JS	R34	Est. Rel., 4.7K, 0.125W	4.31E-06	0.0007	0.03

TABLE A2ES-EOS-9(Cont.)

Resistors, Fixed, Composition		Description		Failure Rate	λ_b	\overline{IR}	\overline{IQ}	\overline{IE}
Part Number	Ref/Qty	Part Number	Ref/Qty	Failure Rate	Failure Rate	Failure Rate	Failure Rate	Failure Rate
RCR05G223JS	R21, R30, R30	Est. Rel., 22K, 0.125W		4.31E-06	0.0007	1	0.03	0.2
RCR05G163JS	R32, R33	Est. Rel., 16K, 0.125W		4.31E-06	0.0007	1	0.03	0.2
RCR05G222JS	R26, R35	Est. Rel., 2.2K, 0.125W		8.39E-06	0.0014	1	0.03	0.2
RCR05G103JS	R27	Est. Rel., 10K, 0.125W		8.39E-06	0.0014	1	0.03	0.2
Resistors, Fixed, Film		Description		Failure Rate	λ_b	\overline{IR}	\overline{IQ}	\overline{IE}
Part Number	Ref/Qty	Part Number	Ref/Qty	Failure Rate	Failure Rate	Failure Rate	Failure Rate	Failure Rate
RLR05C4R75FS	R20	Est. Rel., 4.75, 0.125W		7.56E-06	0.0013	1	0.03	0.2
RLR05C6811FS	R28, R29	Est. Rel., 6.81K, 0.125W		1.51E-05	0.0013	1	0.03	0.2
RLR05C2000FS	R25	Est. Rel., 200, 0.125W		7.56E-06	0.0013	1	0.03	0.2
RNC55J1961FS	R7	Est. Rel., 1.96K, 0.1W		4.41E-06	0.0007	1	0.03	0.2
RNC55D7681FS	R16	Est. Rel., 7.68K, 0.1W		4.69E-06	0.0008	1	0.03	0.2
RNC55D7321FS	R17	Est. Rel., 7.32K, 0.1W		4.67E-06	0.0008	1	0.03	0.2
RNC55D2002FS	R18	Est. Rel., 20K, 0.1W		4.43E-06	0.0007	1	0.03	0.2
RNC55D2002FS	R19	Est. Rel., 20K, 0.1W		4.43E-06	0.0007	1	0.03	0.2
RNC55D6191FS	R20	Est. Rel., 6.19K, 0.1W		4.71E-06	0.0008	1	0.03	0.2
RNC55D8661FS	R21	Est. Rel., 8.66K, 0.1W		4.68E-06	0.0008	1	0.03	0.2
RNC55D2431FS	R22	Est. Rel., 2.43K, 0.1W		4.43E-06	0.0007	1	0.03	0.2
Capacitors, Fixed, Ceramic, General Purpose		Description		Failure Rate	λ_b	\overline{ICV}	\overline{IQ}	\overline{IE}
Part Number	Ref/Qty	Part Number	Ref/Qty	Failure Rate	Failure Rate	Failure Rate	Failure Rate	Failure Rate
M39014/02-1350	C3-C8	Est. Rel., 0.1uF, 100V		7.57E-05	0.0007	1.4547	0.03	0.4
M39014/02-1350	C9-C14	Est. Rel., 0.1uF, 100V		6.76E-05	0.0006	1.4547	0.03	0.4
M39014/02-1347	C22	Est. Rel., 0.068uF, 100V		5.44E-06	0.0007	1.3943	0.03	0.4
M39014/01-1351	C23	Est. Rel., 470pf, 200V		6.22E-06	0.0006	0.8067	0.03	0.4
M123A01BXC102KC	C24	Est. Rel., 0.001uF, 100V		7.60E-06	0.0007	0.8766	0.03	0.4
Capacitors, Fixed, Electrolytic, Tantalum, Solid		Description		Failure Rate	λ_b	\overline{ICV}	\overline{IQ}	\overline{IE}
Part Number	Ref/Qty	Part Number	Ref/Qty	Failure Rate	Failure Rate	Failure Rate	Failure Rate	Failure Rate
M39003/01-8194	C1, C2, C25	Est. Rel., 1uF, 50V		2.52E-03	0.0067	5.2481	0.03	0.4
M39003/01-8024	C15-C21	Est. Rel., 4.7uF, 10V		6.30E-03	0.0138	6.3119	0.03	0.4
M39003/01-3087	C26	Est. Rel., 3.9uF, 50V		4.33E-04	0.0058	6.1791	0.03	0.4
Connector, PCB		Description		Failure Rate	λ_b	\overline{IK}	\overline{IP}	\overline{IE}
Part Number	Ref/Qty	Part Number	Ref/Qty	Failure Rate	Failure Rate	Failure Rate	Failure Rate	Failure Rate
1337748-1	P1	Receptacle, 92-Contact		2.82E-03	0.0003	1.5	13.201	0.5

TABLE A2ES-EOS-9(Cont.)

Interconnection Assemblies with Plated Through Holes											
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>		<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>	<u>N_1</u>	<u>N_2</u>	
13337804	1	Printed Wiring Board		0.01366	4.00E-05	1.7917	1	0.5	372	0	
		Total Failure Rate:		<u>0.03684</u>							

TABLE A2ES-EOS-9(Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors													
Part Number	Ref/Qty	Description	Compl.	Tech.	E _A	θ _{jc} (°C/W)	Temp.	Actual Power	Pins	Years	Package	Quality	
26149-1	U1	Voltage Regulator	100	Linear	0.65	4	36.44	0.361	3	2	Can	S	
26149-2	U2	Voltage Regulator	4	Linear	0.50	21	42.58	0.361	3	2	Can	S	
26149-3	U3	2.5V Reference Diode	28	Linear	0.65	80	35.4	0.005	3	2	Can	S	
26149-7	U4	Operational Amplifier	20	Linear	0.65	23	36.75	0.076	7	2	Can	S	
26149-7	U5	Operational Amplifier	20	Linear	0.65	23	36.75	0.076	7	2	Can	S	
26043-14	U6	16 Channel MUX/DeMUX	16	Digital	0.50	51	35	1.50E-05	28	2	Hermetic	S	
26149-7	U7	Operational Amplifier	20	Linear	0.65	45	35.23	0.005	7	2	Can	S	
26123-1	U8	16 Bit A/D Converter	16	Digital	0.50	28	35	1.50E-05	40	2	Hermetic	S	
AS8083-08	U9	Hex Schmitt Trigger	1	Digital	0.50	28	35	1.50E-05	14	2	Hermetic	S	
M38510/0525SCX	U10	Quad NOR Gate	4	Digital	0.5	28	35	0.005	14	2	Hermetic	S	
Diodes, Low Frequency				Rated Voltage	Actual Voltage	θ _{jc} (°C/W)	Junct. Temp.	Rated Power	Actual Power	Case	Quality		
JANS1N5615	Ref/Qty	CR1, CR2	25	5.1	38	106.25	25	1.875		JANTXV			
26042-4573A		CR3, CR4	n/a	n/a	38	44.12	0.4	0.24	DO-7	JANTXV			
JANS1N4148-1		CR5	100	50	95	2		1.2		JANTX /116			
Transistors, Low Frequency, Bipolar				θ _{jc} (°C/W)	Junct. Temp.	Rated Power	Actual Power	VCE Applied	VCEO	Rated Vceo	Appl. Lin/Sw	Quality	
JANS2N2222A	Ref/Qty	Q1, Q2, Q7	Case TO-18	70	40.32	0.4	0.076	15	35	Lin	JANTXV		
JANS2N2907A		Q3-Q6	TO-18	70	40.32	0.32	0.076	15	35	Lin	JANTXV		
JANS2N2907A		Q8	TO-18	70	35.53	0.32	0.0075	5	35	Lin	JANTXV		
26041-3811		Q9	TO-77	71	45.65	0.25	0.15	36	60	Lin	JANTXV		
Resistors, Fixed, Composition				Rated Power	Actual Power	Quality							
RCR05G101JS	Ref/Qty	R1, R2	Ohms	100	0.125	0.0004	S						
RCR05G101JS		R3-R6		100	0.125	0.004	S						
RCR05G102JS		R8, R24		1000	0.125	1.00E-06	S						
RCR05G104JS		R9		100000	0.125	1.00E-06	S						
RCR05G561JS		R10		560	0.125	0.0018	S						
RCR05G352JS		R11		3300	0.125	0.0018	S						
RCR05G100JS		R12		10	0.125	0.0006	S						
RCR05G100JS		R13, R14		10	0.125	0.0006	S						
RCR05G512JS		R15		5100	0.125	0.00	S						
RCR05G133JS		R23		13000	0.125	0.012	S						
RCR05G472JS		R34		4700	0.125								

TABLE A2ES-EOS-9(Cont.)

<u>Resistors, Fixed, Composition</u>		<u>Ref/Qty</u>	<u>Description</u>	<u>Ohms</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Quality</u>
<u>Part Number</u>		R21, R30, R30	Est. Rel., 22K, 0.125W	22000	0.125	0.125	S
RCR05G223JS		R32, R33	Est. Rel., 16K, 0.125W	16000	0.125	0.125	S
RCR05G163JS		R26, R35	Est. Rel., 2.2K, 0.125W	2200	0.125	0.075	S
RCR05G222JS		R27	Est. Rel., 10K, 0.125W	10000	0.125	0.075	S
<u>Resistors, Fixed, Film</u>	<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Ohms</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Quality</u>
RLR05C4R75FS		R20	Est. Rel., 4.75, 0.125W	4.75	0.125	0.075	S
RLR05C6811FS		R28, R29	Est. Rel., 6.81K, 0.125W	6810	0.125	0.075	S
RLR05C2000FS		R25	Est. Rel., 200, 0.125W	200	0.125	0.075	S
RNC55J1961FS		R7	Est. Rel., 1.96K, 0.1W	1960	0.1	0.002	S
RNC55D7681FS		R16	Est. Rel., 7.68K, 0.1W	7680	0.1	0.0077	S
RNC55D7321FS		R17	Est. Rel., 7.32K, 0.1W	7320	0.1	0.0073	S
RNC55D2002FS		R18	Est. Rel., 20K, 0.1W	20000	0.1	0.0025	S
RNC55D2002FS		R19	Est. Rel., 20K, 0.1W	20000	0.1	0.0025	S
RNC55D6191FS		R20	Est. Rel., 6.19K, 0.1W	6190	0.1	0.008	S
RNC55D8661FS		R21	Est. Rel., 8.66K, 0.1W	8660	0.1	0.0074	S
RNC55D2431FS		R22	Est. Rel., 2.43K, 0.1W	2430	0.1	0.0025	S
<u>Capacitors, Fixed, Ceramic, General Purpose</u>	<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>pF</u>	<u>Rated Temp.</u>	<u>Actual Voltage</u>	<u>Quality</u>
M39014/02-1350		C3-C8	Est. Rel., 0.1uF, 100V	100000	125	100	S
M39014/02-1350		C9-C14	Est. Rel., 0.1uF, 100V	100000	125	100	S
M39014/02-1347		C22	Est. Rel., 0.068uF, 100V	66000	125	100	S
M39014/01-1351		C23	Est. Rel., 470pF, 200V	470	125	200	S
M123A01BXC102KC		C24	Est. Rel., 0.001uF, 100V	1000	125	100	S
<u>Capacitors, Fixed, Electrolytic, Tantalum, Solid</u>	<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Series</u>	<u>Rated Temp.</u>	<u>Actual Voltage</u>	<u>Quality</u>
M39003/01-8194		C1, C2, C25	Est. Rel., 1uF, 50V	1.00E+06	0.1	125	S
M39003/01-8024		C15-C21	Est. Rel., 4.7uF, 10V	4.70E+06	0.1	125	S
M39003/01-3087		C26	Est. Rel., 3.9uF, 50V	3.90E+06	0.1	125	S
<u>Connector, PCB</u>	<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Active Pins</u>	<u>Avg. Gauge</u>	<u>Temp. Rise</u>	<u>Mate / Unmate Quality per 1000 hours</u>
1337748-1		P1	Receptacle, 92-Contact	65	26	0.1	0.03 Mill 0.5

TABLE A2ES-EOS-9(Cont.)

SIG_PROC.xls
03/13/1996

Interconnection Assemblies with Plated Through Holes					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Layers</u>	<u>Quality</u>	<u>Wave Solder</u>
1337804	1	Printed Wiring Board	5	Mill	PTHs-> 372 0 Hand Solder

TABLE A2ES-EOS-10

Microcircuits, Gate/Logic Arrays and Microprocessors										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>IT</u>	<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>C1</u>	<u>C2</u>	
26044-1	U1,U4	Quadruple CMOS Switch	0.00269	0.257654	0.5	0.25	1	0.01	0.005593	
M38510/10104SGX	U2,U3,U5,U6	Operational Amplifier	0.00325	0.22747	0.5	0.25	1	0.01	0.00196	
Resistors, Fixed, Composition										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>IR</u>	<u>IQ</u>	<u>IE</u>			
RCR05G102JS	R1,R6,R9,R14	1K, 0.125W	1.55E-05	0.000648	1	0.03	0.2			
RCR05G101JS	R2,R5,R10-R13	100, 0.125W	3.12E-05	0.00065	1	0.03	0.2			
RCR05G103JS	R17-R28	10K, 0.125W	4.66E-05	0.000648	1	0.03	0.2			
Resistors, Fixed, Film										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>IR</u>	<u>IQ</u>	<u>IE</u>			
RNC55C549FS	R7,R8,R15,R16	Est. Rel., 549K, 125mW	1.71E-05	0.000648	1.1	0.03	0.2			
Capacitors, Fixed, Ceramic, General Purpose										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>ICV</u>	<u>IQ</u>	<u>IE</u>			
M123A02BXB104KC	8	Est. Rel., 0.1uF, 50V	0.00020	0.001399	1.454735	0.03	0.4			
M39014/01-1339	C7, C8, C17, C18	Est. Rel., 0.1uF, 200V	4.57E-05	0.001399	0.680431	0.03	0.4			
Capacitors, Fixed, Electrolytic, Tantalum, Solid										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>ICV</u>	<u>ISR</u>	<u>IQ</u>	<u>IE</u>		
M39003/01-8194	C3, C4	Est. Rel., 1uF, 50V	5.28E-05	0.006666	1	0.33	0.03	0.4		
Capacitors, Teflon										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>ICV</u>	<u>IQ</u>	<u>IE</u>			
26028B154JSA	C1, C2, C11, C12	0.15uF, 50V	0.00023	0.004865	0.796399	0.03	0.5			
Interconnection Assemblies with Plated Through Holes										
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>IC</u>	<u>IP</u>	<u>IE</u>	<u>N1</u>	<u>N2</u>	
1337748-1	P1	Receptacle, 92-Contact	0.00203	0.000285	1.5	9.500489	0.5			
1338425	1	Printed Wiring Board	0.00408	1.7E-05	1.791697	1	0.5	268	0	
Total Failure Rate:		<u>0.01269</u>								

TABLE A2ES-EOS-10 (Cont.)

SIG_PROC.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microproc		Compl.	Tech.	E_θ	Junct.	θ_{JC}	Mfr
Part Number	Ref/Qty			Linear	Temp.	Watts	Package
26044-1	U1, U4	41	Linear	0.65	36.58	0.045	S
M38510/10104SGX	U2, U3, U5, U6	29	Linear	0.65	35.00	1.0E-6	S
Resistors, Fixed, Composition		Rated	Actual				Quality
Part Number	Ref/Qty	Ohms	Power				
RCR05G102JS	R1, R6, R9, R14	1000	0.125	0.000001			S
RCR05G101JS	R2-R5, R10-R13	100	0.125	0.0004			S
RCR05G103JS	R17-R28	10000	0.125				S
Resistors, Fixed, Film		Rated	Actual				Quality
Part Number	Ref/Qty	Ohms	Power				
RNC55C549FS	R7, R8, R15, R16	5490000	0.125	0.00011			S
Capacitors, Fixed, Ceramic, General Purpose		Rated	Actual				Quality
Part Number	Ref/Qty	pF	Temp.	Voltage	Voltage	Voltage	
M123A02BXB104KC	8	100000	85	50	15		S
M39014/01-1339	C7, C8, C17, C18	100	85	50	15		S
Capacitors, Fixed, Electrolytic, Tantalum, Solid		Rated	Actual				Quality
Part Number	Ref/Qty	uF	Temp.	Voltage	Voltage	Voltage	
M39003/01-8194	C3, C4	1	85	50	15		S
Capacitors, Teflon		Rated	Actual				Quality
Part Number	Ref/Qty	uF	Temp.	Voltage	Voltage	Voltage	
26028B154JSA	C1, C2, C11, C12	0.15	100	50	6.7		S
Connector, PCB		Active	Pin	Avg.	Temp.	Mate / Unmate	
1337748-1	P1	Pins	Gauge	Current	Rise	Quality	per 1000 hours
1338425	1	50	26	0.1	0.03	Mil	0.5
Interconnection Assemblies with Plated Through Holes							
Part Number	Ref/Qty	Layers	Quality	PTHs->	Wave Solder	Hand Solder	
1338425	1	5	Mil	PTHs->	268	0	

TABLE A2ES-EOS-11

Microcircuits, Gate/Logic Arrays and Microprocessors									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>C1</u>	<u>C2</u>
HS-80C85RH	U1	8-Bit Microprocessor	0.00745	0.159128	0.5	0.25	1	0.14	0.015045
HS-82C12RH/Q	U2, U8, U9	8-Bit I/O Port	0.00442	0.155765	0.5	0.25	1	0.01	0.008665
HS-54C138RH/Q	U4, U5, U7	3-to-8 Line Decoder	0.00442	0.155744	0.5	0.25	1	0.01	0.008665
CD40106	U13	Hex Schmitt Trigger	0.00108	0.188495	0.5	0.25	1	0.01	0.004841
CD4069UB	U14	Hex Inverter	0.00099	0.155851	0.5	0.25	1	0.01	0.004841
CD4081B	U15	Quadtriple AND Gate	0.00099	0.155851	0.5	0.25	1	0.01	0.004841
CD4071B	U16	Quadtriple OR Gate	0.00100	0.155931	0.5	0.25	1	0.01	0.004841
Microcircuits, Memories									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>C1</u>	<u>C2</u>
MA7001	U6	512x9 FIFO	0.00175	0.243508	0.5	0.25	1	0.0078	0.010235
HS-6617RH	U10, U11	2Kx8 Fuse Link PROM	0.00224	0.240976	0.5	0.25	1	0.00065	0.008665
HS-81C56RH	U3	256x8 RAM	0.00230	0.215091	0.5	0.25	1	0.0078	0.015045
Microcircuits, Hybrids									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>lb</u>	<u>IE</u>	<u>IF</u>	<u>IQ</u>	<u>IL</u>	
BU61582	U12	Based on ILC Data (See Below)	0.05357	0.194796	0.5	1	0.25	1	
Hybrid Microcircuits									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>C1</u>	<u>C2</u>
JRAD	U3		0.12108	0.256781	0.5	1	1	0.16	0
RAM	U4	Rad-Hard Static RAM	0.05942	0.458462	0.5	1	1	0.062	0
Hybrid Diodes									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>III</u>	<u>IS</u>	<u>IC</u>	<u>IQ</u>	<u>IE</u>
JANTX1N4148	CR1-CR4	Switching Diode	0.00054	0.0010	2.518209	0.054	1	1	1
Hybrid Capacitors									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>ICV</u>	<u>IQ</u>	<u>IE</u>		
C1, C11		2.2 pF, 50V, Fixed, Ceramic	0.00063	0.0007	0.447147	1	1		
C4, C14		22 pF, 50V, Fixed, Ceramic	0.00081	0.0007	0.576037	1	1		
C2, C3, C12, C		27 pF, 50V, Fixed, Ceramic	0.00165	0.0007	0.589161	1	1		
C5, C15		56 pF, 50V, Fixed, Ceramic	0.00089	0.0007	0.638388	1	1		
C7, C8, C17, C		82 pF, 50V, Fixed, Ceramic	0.00186	0.0007	0.665738	1	1		
C6, C16, C19-C26		10000 pF, 50V, Fixed, Ceramic	0.00790	0.0007	1.129234	1	1		

Report 9831C
March 1996

TABLE A2ES-EOS-11 (Cont.)

Diodes, Low Frequency	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{Σ}</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>
JANS1N6642	CR1, CR2	Switching Diode	5.30E-05	0.001	1.400872	0.054	1	0.7
Resistors, Fixed, Film								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_R</u>	<u>Π_Q</u>	<u>Π_E</u>	
RLR05C2002FS	R1	20K, 0.125W, 1%, Est. Rel.	3.92E-06	0.000653	1	0.03	0.2	
RLR05C5002FS	R2	50K, 0.125W, 1%, Est. Rel.	3.92E-06	0.000653	1	0.03	0.2	
RLR05C5002FS	R3-R8	50K, 0.125W, 1%, Est. Rel.	2.62E-05	0.000727	1	0.03	0.2	
TBD	R9-R12	550K, 0.125W, 1%, Est. Rel.	1.74E-05	0.000727	1	0.03	0.2	
Capacitors, Fixed, Ceramic, General Purpose								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{CV}</u>	<u>Π_Q</u>	<u>Π_E</u>	
M39014/01-1357	C1	1000pF	7.40E-06	0.000703	0.876564	0.03	0.4	
M39014/01-1593	C4-C9	0.1uF, 50V, Est. Rel.	7.64E-05	0.000729	1.454735	0.03	0.4	
Capacitors, Fixed, Electrolytic, Tantalum, Solid								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{CV}</u>	<u>Π_E</u>	<u>Π_Q</u>	<u>Π_E</u>
M39003/01-8024	C2	4.7uF, 10V, Est. Rel.	7.29E-05	0.015289	1.20407	0.33	0.03	0.4
M39003/01-8214	C3	4.7uF, 50V, Est. Rel.	9.17E-05	0.004773	1.20407	1.33	0.03	0.4
Inductive Devices, Transformers								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_Q</u>	<u>Π_E</u>		
TST-9002	1		0.04043	0.006739	12	0.5		
Connector, PCB	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_E</u>	
1337748-1	P1	Receptacle, 92-Contact	0.00142	0.000285	1.5	6.658756	0.5	
Interconnection Assemblies with Plated Through Holes								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_Q</u>	<u>Π_E</u>	<u>Π_1</u>	<u>Π_2</u>
1356416-1	1	Printed Wiring Board	0.01107	1.7E-05	2.214752	1	0.5	0
Quartz Crystals	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_Q</u>	<u>Π_E</u>		
M55310/26	U17	Crystal Oscillator	0.00762	0.015247	1	0.5		
M55310/26	U18	Crystal Oscillator	0.01230	0.024597	1	0.5		
Total Failure Rate: <u>0.15342</u>								

TABLE A2ES-EOS-11 (Cont.)

Microcircuits, Gate/Logic Arrays and MI									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Compl.</u>	<u>Tech.</u>	<u>E_A</u>	<u>Junct.</u>	<u>θ_{jc}</u>	<u>Mfr</u>	<u>Years</u>	<u>Package</u>
HS-80C85RH	U1	8	Digital	0.35	35.51	9.9	40	2	Hermetic S
HS-82C12RH/Q	U2, U8, U9	46	Digital	0.35	35.02	0.001	15.1	2	Hermetic S
HS-54C138RH/Q	U4, U5, U7	32	Digital	0.35	35.01	0.001	12	2	Hermetic S
CD40106	U13	6	Digital	0.5	35.03	0.001	28	2	Hermetic S
CD4069UB	U14	6	Digital	0.35	35.03	0.001	28	2	Hermetic S
CD4081B	U15	4	Digital	0.35	35.03	0.001	28	2	Hermetic S
CD4071B	U16	4	Digital	0.35	35.04	0.001	40	2	Hermetic S
Microcircuits, Memories									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>K-Bits</u>	<u>Tech./Type</u>	<u>E_A</u>	<u>Junct.</u>	<u>θ_{jc}</u>	<u>Mfr</u>	<u>Years</u>	<u>Package</u>
MA7001	U6	5	MOS/SRAM	0.6	36.80	0.15	12	28	Hermetic S
HS-6617RH	U10, U11	16	MOS/PROM	0.6	36.66	0.138	12	24	Hermetic S
HS-81C56RH	U3	2	MOS/SRAM	0.6	35.10	0.01	9.9	40	Hermetic S
Microcircuits, Hybrids									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Function</u>	<u>Mfr</u>	<u>Years</u>	<u>Quality</u>	Pre-Elect. Burn-In, PIND, X-Ray performed on S Level Hybrid			
BU61582	U12	Digital	.	2	S				
<i>Hybrid Microcircuits</i>									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Compl.</u>	<u>Tech.</u>	<u>E_A</u>	<u>Junct.</u>	<u>θ_{jc}</u>	<u>Mfr</u>	<u>Years</u>	<u>Quality</u>
JRAD	U3	13000	Digital	0.35	47.15	0.49	4.39	2	B
RAM	U4	262	MOS/SRAM	0.6	45.77	0.3	2.58	2	B
<i>Hybrid Diodes</i>									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Contact</u>	<u>Type/App</u>	<u>Rated Voltage</u>	<u>Applied Voltage</u>	<u>Junct. Temp.</u>	<u>Watts</u>	<u>LCM</u>	<u>Quality</u>
JANTX1N4148	CRI-CR4	Metal	Switch	100	20	54.13	0.198	96.6	JANTX
<i>Hybrid Capacitors</i>									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>pF</u>	<u>Temp.</u>	<u>Rated Voltage</u>	<u>Actual Voltage</u>	<u>Voltage</u>	<u>Quality</u>		
C1, C11	2.2	125	50	5.5		M			
C4, C14	22	125	50	5.5		M			
C2, C3, C12, C	27	125	50	5.5		M			
C5, C15	56	125	50	5.5		M			
C7, C8, C17, C	82	125	50	5.5		M			
C6, C16, C19-C26	10000	125	50	5.5		M			

TABLE A2ES-EOS-11 (Cont.)

Diodes, Low Frequency		<u>Ref/Qty</u>	<u>Contact Metal</u>	<u>Type/App Switch</u>	<u>Rated Voltage</u>	<u>Applied Voltage</u>	<u>Junct. Temp.</u>	<u>Watts</u>	<u>θjc (°C/W)</u>	<u>Case DO-35</u>	<u>Quality JAN/TXV</u>	<u>/116</u>
<u>Part Number</u>		<u>Ref/Qty</u>	<u>CR1, CR2</u>									
Resistors, Fixed, Film												
<u>Part Number</u>		<u>Ref/Qty</u>	<u>Ohms</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Actual Power</u>						
RLR05C2002FS		R1	20000	0.125	0.001	S						
RLR05C5002FS		R2	50000	0.125	0.001	S						
RLR05C5002FS		R3-R8	50000	0.125	0.013	S						
TBD		R9-R12	55	0.125	0.013	S						
Capacitors, Fixed, Ceramic, General Pur												
<u>Part Number</u>		<u>Ref/Qty</u>	<u>pF</u>	<u>Temp.</u>	<u>Rated Voltage</u>	<u>Actual Voltage</u>						
M39014/01-1357		C1	1000	85	100	5.25	S					
M39014/01-1593		C4-C9	100000	85	50	5.25	S					
Capacitors, Fixed, Electrolytic, Tantalum												
<u>Part Number</u>		<u>Ref/Qty</u>	<u>uF</u>	<u>Temp.</u>	<u>Rated Voltage</u>	<u>Actual Voltage</u>						
M39003/01-8024		C2	4.7	85	10	5.25	S					
M39003/01-8214		C3	4.7	85	50	5.25	S					
Inductive Devices, Transformers												
<u>Part Number</u>		<u>Ref/Qty</u>	<u>THS</u>	<u>Type</u>	<u>Rated Temp.</u>	<u>Actual Temp.</u>						
TS1-9002		1	61.91	RF	85	Mil						
Connector, PCB												
<u>Part Number</u>		<u>Ref/Qty</u>	<u>Active Pins</u>	<u>Pin Gauge</u>	<u>Avg. Current</u>	<u>Temp. Rise</u>						
1337748-1		P1	36	26	0.1	0.03	Mil					
Interconnection Assemblies with Plated												
<u>Part Number</u>		<u>Ref/Qty</u>	<u>Layers</u>	<u>Quality</u>								
1356416-1		1	7	Mil								
Quartz Crystals												
<u>Part Number</u>		<u>Ref/Qty</u>	<u>Quality</u>	<u>Freq (MHz)</u>								
M5531026		U17	Mil	2								
M5531026		U18	Mil	16								

TABLE A2ES-EOS-12

Microcircuits, Gate/Logic Arrays and Microprocessors						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>	<u>C2</u>
25012/03-1	U1	3-to-8 Line Decoder	0.00118	0.155664811	0.25	0.0025
25012/02-1	U2-U6	8-Bit I/O Port	0.00590	0.155662025	0.25	0.0025
25012/07-1	U7	8-Bit Down Counter	0.00080	0.15566278	0.25	0.0025
25012/08-1	U8, U14-U16	Sync. 4-Bit Counter	0.00319	0.155668144	0.25	0.0025
M38510R17101SCX	U9	Counter/Divider	0.00080	0.15566278	0.25	0.0025
M38510R17401SCX	U11, U21	Hex Inverter	0.00140	0.15567281	0.25	0.0025
M38510R05151SCX	U10, U13, U19, U20	Dual 'D' Flip-Flop	0.00319	0.155665345	0.25	0.0025
M38510H17001SCX	U22	Quadruple AND Gate	0.00070	0.155668144	0.25	0.0025
M38510H05554SEX	U23	Hex Buffer	0.00080	0.155679342	0.25	0.0025
Microcircuits, Memories						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>	<u>C2</u>
25012/05-1	U18	2K x 8 Fuse Link PROM	0.00111	0.155664811	0.25	0.00065
Capacitors, Fixed, Ceramic, General Purpose						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>b</u>	<u>II</u>	<u>IE</u>
M123A02BXB104KC	C2-C14	Est. Rel., 0.1uF, 50V	0.00016	0.000725252	1.454734896	0.03
M39014/01-1575	C15, C16	Est. Rel., 0.1uF, 100V	1.14E-05	0.000700167	0.680430632	0.03
Capacitors, Fixed, Electrolytic, Tantalum						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>b</u>	<u>II</u>	<u>IE</u>
M39003/01-8194	C1	Est. Rel., 1uF, 50V	2.64E-05	0.006666495	1	0.33
<u>Connector, PCB</u>	<u>Qty/Ref</u>	<u>Description</u>	<u>Failure Rate</u>	<u>b</u>	<u>II</u>	<u>IE</u>
1337748-1	P1	Receptacle, 92 Contact	0.00243	0.000284711	1.5	11.38266573
Interconnection Assemblies with Plated Through Holes						
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>b</u>	<u>II</u>	<u>N1</u>
1337293-1	1	Printed Wiring Board	0.00715	1.7E-05	1.556722316	1
Total Failure Rate: <u>0.02884</u>						0

TABLE A2ES-EOS-12 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors						Microcircuits, Memories						
Part Number	Ref/Qty	Description	Gates	Tech.	Junct.	θjc	[°C/W]	Mfr	Pins	Years	Package	Quality
25012/03-1	U1	3-to-8 Line Decoder	32	Digital	0.35	35.00	5.0E-6	Hermelinc	12	2	Hermelinc	S
25012/02-1	U2-U6	8-Bit I/O Port	46	Digital	0.35	35.00	175.0E-6	Hermelinc	15.1	2	Hermelinc	S
25012/07-1	U7	8-Bit Down Counter	31	Digital	0.35	35.00	10.0E-6	Hermelinc	28	2	Hermelinc	S
25012/08-1	U8, U14-U16	Sync. 4-Bit Counter	60	Digital	0.35	35.00	20.0E-6	Hermelinc	28	2	Hermelinc	S
M38510R17101SCX	U9	Counter/Divider	36	Digital	0.35	35.00	10.0E-6	Hermelinc	28	2	Hermelinc	S
M38510R17401SCX	U11, U21	Hex Inverter	6	Digital	0.35	35.00	45.0E-6	Hermelinc	28	2	Hermelinc	S
M38510R05151SCX	U10,U13,U19,U20	Dual 'D' Flip-Flop	15	Digital	0.35	35.00	5.0E-6	Hermelinc	28	2	Hermelinc	S
M38510H17001SCX	U22	Quadruple AND Gate	4	Digital	0.35	35.00	20.0E-6	Hermelinc	28	2	Hermelinc	S
M38510H05554SEX	U23	Hex Buffer	6	Digital	0.35	35.00	80.0E-6	Hermelinc	28	2	Hermelinc	S
Capacitors, Fixed, Ceramic, General Purpose						Capacitors, Fixed, Electrolytic, Tantalum						
Part Number	Ref/Qty	Description	PF	Temp.	Rated	θjc	[°C/W]	Mfr	Pins	Years	Package	Quality
M123A02BXB104KC	C2-C14	Est. Rel., 0.1uF, 50V	1000000	85	50	5						
M39014/01-1575	C15, C16	Est. Rel., 0.1uF, 100V	100	85	100	3.16						
Part Number	Ref/Qty	Description	UF	Temp.	Rated	θjc	[°C/W]	Mfr	Pins	Years	Package	Quality
M39003/01-8194	C1	Est. Rel., 1uF, 50V	1	85	50	15						
Connector, PCB	Qty/Ref	Description	Pin	Voltage	Avg.	Temp.	Wave Solder	Mate / Unmate				
1337748-1	P1	Receptacle, 92-Contact	26	0.1	0.03	Rise	Hand Solder	Per 1000 hours				
Interconnection Assemblies with Plated Through Holes						θjc	[°C/W]	Mfr	Pins	Years	Package	Quality
Part Number	Ref/Qty	Description	Layers	Quality	PTHs>	Weld	Wave Solder	Hand Solder				
13377493-1	1	Printed Wiring Board	4	Mill	540	0						

Total Failure Rate:

TABLE A2ES-EOS-13

Microcircuits, Gate/Logic Arrays and Microprocessors									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>	<u>I</u>	<u>II</u>	<u>C1</u>	<u>C2</u>
M38510/17401SCX	U1	Hex Inverter	0.00070	0.155678	0.5	0.25	1	0.0025	0.004841
M38510H05554SEX	U3	Hex Buffer	0.00070	0.155666	0.5	0.25	1	0.0025	0.004841
25012/01-1	U4, U12-U14	8-Bit I/O Port	0.00472	0.15567	0.5	0.25	1	0.0025	0.008665
25012/09-1	U5	8-Bit Microprocessor	0.00733	0.155678	0.5	0.25	1	0.14	0.015045
M38510H05051SCX	U6	Quadruple NAND Gate	0.00070	0.155666	0.5	0.25	1	0.0025	0.004841
25012/03-1	U7	3-to-8 Line Decoder	0.00080	0.155672	0.5	0.25	1	0.0025	0.005593
M38510R17001SCX	U8	Quadruple AND Gate	0.00070	0.155666	0.5	0.25	1	0.0025	0.004841
M38510/17101SCX	U9	Quadruple OR Gate	0.00070	0.155691	0.5	0.25	1	0.0025	0.004841
25012/01-1	U11	8-Bit Bus Transceiver	0.00099	0.155673	0.5	0.25	1	0.0025	0.007117
Microcircuits, Memories									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>	<u>I</u>	<u>II</u>	<u>C1</u>	<u>C2</u>
HS-65647RH	U10	8Kx8 RAM Module	0.00274	0.21366	0.5	0.25	1	0.016	0.015045
Diodes, Low Frequency									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>III</u>	<u>II</u>	<u>I</u>	<u>II</u>	<u>IE</u>
JANS1N4148-1	CR1	Diode	0.00010	0.00038	1.400416	0.054	1	0.7	0.5
Resistors, Fixed, Film									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>III</u>	<u>II</u>	<u>I</u>	<u>II</u>	<u>IE</u>
RLR05C2002FS	R1	20K, 0.125W, Est. Rel.	3.93E-06	0.000654	1	0.03	0.2		
RLR05C1003FS	R2-R6	100K, 0.125W, Est. Rel.	2.24E-05	0.000679	1.1	0.03	0.2		
Capacitors, Fixed, Ceramic, General Purpose									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>III</u>	<u>II</u>	<u>I</u>	<u>II</u>	<u>IE</u>
M39014/01-1593	C2-C7	0.1uF, 50V, Est. Rel.	7.60E-05	0.000725	1.454735	0.03	0.4		
Capacitors, Fixed, Electrolytic, Tantalum, Solid									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>PCV</u>	<u>ISR</u>	<u>IQ</u>	<u>IE</u>	
M39003/01-8214	C1	4.7uF, 50V, Est. Rel.	2.27E-05	0.004762	1.20407	0.33	0.03	0.4	
M39003/01-8024	C8	4.7uF, 10V, Est. Rel.	6.60E-05	0.013846	1.20407	0.33	0.03	0.4	

TABLE A2ES-EOS-13 (Cont.)

<u>Connector, PCB</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_E</u>
1337748-1	P1	Receptacle, 92-Contact	0.00171	0.000285	1.5	8.011861	0.5
Interconnection Assemblies with Plated Through Holes							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>
1337282-1	1	PWB, CPU	0.00738	1.7E-05	2.009781	1	0.5
<u>Quartz Crystals</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_Q</u>	<u>Π_E</u>	<u>Π_Q</u>
M55310/26	U2	Clock Oscillator	0.00684	0.01368	1	0.5	0.5
<u>Connections</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_Q</u>	<u>Π_E</u>	<u>Π_Q</u>
Hand Solder, with Wrapping	2	E1 - E2 Connection	0.00014	0.00014	1	0.5	0.5
Total Failure Rate: <u>0.02334</u>							

TABLE A2ES-EOS-13 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors									
Part Number	Ref/Qty	Description	Comp.	Tech.	E _a	Junct.	Actual Watts	θ _{jc}	Mfr
M38510/17401SCX	U1	Hex Inverter	5	Digital	0.35	35.00	0.00005	40	2
M38510H05554SEX	U3	Hex Buffer	5	Digital	0.35	35.00	5.0E-6	40	2
2501201-1	U4, U12-U14	8-Bit I/O Port	46	Digital	0.35	35.00	55.0E-6	15.1	2
2501209-1	U5	8-Bit Microprocessor	8	Digital	0.35	35.00	0.0002	9.9	2
M38510H05051SCX	U6	Quadruple NAND Gate	1	Digital	0.35	35.00	5.0E-6	40	2
2501203-1	U7	3-to-8 Line Decoder	32	Digital	0.35	35.00	0.0001	12	2
M38510R17001SCX	U8	Quadruple AND Gate	2	Digital	0.35	35.00	5.0E-6	40	2
M38510/17101SCX	U9	Quadruple OR Gate	2	Digital	0.35	35.00	0.0001	40	2
2501201-1	U11	8-Bit Bus Transceiver	54	Digital	0.35	35.00	105.0E-6	12	2
Microcircuits, Memories									
Part Number	Ref/Qty	Description	K-Bits	Tech./Type	E _a	Junct.	Actual Watts	θ _{jc}	Mfr
HS-65647RH	U10	8Kx8 RAM Module	64	MOS/SRAM	0.6	35.01	0.0002	40	2
Diodes, Low Frequency									
Part Number	Ref/Qty	Description	Rated	Actual	θ _{jc}	Junct.	Rated Watts	Actual Watts	Packag e
JANS1N4148-1	CR1	Diode	Voltage	Voltage	10	35.00	0.383	1.0E-6	DO-3
Resistors, Fixed, Film									
Part Number	Ref/Qty	Description	Ohms	Watts	Watts	Quality	Watts	Watts	Quality
RLR05C2002FS	R1	20K, 0.125W, Est. Rel.	20000	0.125	0.0012	S			
RLR05C1003FS	R2-R6	100K, 0.125W, Est. Rel.	100000	0.125	0.0053	S			
Capacitors, Fixed, Ceramic, General Purpose									
Part Number	Ref/Qty	Description	PF	Temp.	Temp.	Quality	Voltage	Voltage	Quality
M39014/01-1593	C2-C7	0.1uF, 50V, Est. Rel.	100000	85	50	S	5	5	S
Capacitors, Fixed, Electrolytic, Tantalum, Solid									
Part Number	Ref/Qty	Description	uF	Temp.	Voltage	Voltage	Voltage	Voltage	Quality
M39003/01-8214	C1	4.7uF, 50V, Est. Rel.	4.7	85	50	5	5	5	S
M39003/01-8024	C8	4.7uF, 10V, Est. Rel.	4.7	85	10	5	5	5	S

TABLE A2ES-EOS-13 (Cont.)

<u>Connector, PCB</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Active Pins</u>	<u>Avgage</u>	<u>Average Temp.</u>	<u>Mate / Unmate per 1000 hours</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Current</u>	<u>Rise</u>	<u>Quality</u>	
Interconnection Assemblies with Plated Through Holes						
1337282-1	1	PWB, CPU	6	PTHs->	432	0
Quartz Crystals	Ref/Qty	Description	Quantity	Wave Solder Hand Solder		
M55310/26	U2	Clock Oscillator	Mil	PTHs->	432	0
			Mil	Freq (MHz)		
			Mil	1.248		

TABLE A2ES-EOS-14

Microcircuits, Gate/Logic Arrays and Microprocessors					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>IIQ</u>
2501203-1	U9	3-to-8 Line Decoder	0.00080	0.15567241	0.5
Microcircuits, Memories					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>IIQ</u>
2501205-3	U1-U8	2K x 8 Fuse Link PROM	0.00887	0.1555678409	0.5
Diodes, Low Frequency					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>III</u>
JANS1N4148-1	CR1	Diode	0.00010	0.0038	1.400415897
					0.054
Resistors, Fixed, Film (Established Reliability)					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>IIR</u>
RLR05C2002FS	R1	20K, 0.125W, Insulated	3.93E-06	0.000654479	1
RLR05C1003FS	R2-R6	100K, 0.125W, Insulated	2.24E-05	0.000678744	1.1
					0.03
					0.03
					0.2
					0.2
Capacitors, Fixed, Ceramic, General Purpose					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>ICV</u>
M123A02BXC104KC	C2-C6	0.1uF, 100V, Est. Rel.	6.33E-05	0.000725252	1.454734896
					0.03
					0.4
Capacitors, Fixed, Electrolytic, Tantalum, Solid					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>ICV</u>
M3900301-8214	C1	4.7uF, 50V, Est. Rel.	2.27E-05	0.004761782	1.20407002
					0.33
					0.03
					0.4
Connector, PCB					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>IIK</u>
1337748-1	P1	Receptacle, 92-Contact	0.00123	0.000284711	1.5
					5.76852232
Interconnection Assemblies with Plated Through Holes					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λb</u>	<u>IIQ</u>
1337283-1	1	Printed Wiring Board	0.00431	1.7E-05	1.556722316
					1
					0.5
					326
					N2
					0

Total Failure Rate: 0.01542

TABLE A2ES-EOS-14 (Cont.)

Microcircuits, Gate/Logic Arrays and Microprocessors									
Part Number	Ref/Qty	Description	Compl.	Tech.	E _A	Junct.	θ _{jc}	Mfr	Package
25012/03-1	U9	3-to-8 Line Decoder	32	Digital	0.35	35.00	0.0001	12	16
25012/05-3	U1-U8	2K x 8 Fuse Link PROM	16	MOS/PROM	0.35	35.00	0.000175	12	24
Microcircuits, Memories									
Part Number	Ref/Qty	Description	K-Bits	Tech./Type	E _A	Junct.	θ _{jc}	Mfr	Package
JANS1N4148-1	CR1	Diode	Rated	Actual	θ _{jc}	Junct.	Rated	Actual	Quality
			Voltage	Voltage	[C/W]	[C/W]	Temp.	Power	Case
			75	5	10	10	35.00	0.383	DO-3
								1.0E-6	JANTXV
Resistors, Fixed, Film (Established Reliability)									
Part Number	Ref/Qty	Description	Ωhms	Quality		Rated	Actual	Power	Power
RLR05C2002FS	R1	20K, 0.125W, Insulated	20000	S				0.125	0.0012
RLR05C1003FS	R2-R6	100K, 0.125W, Insulated	100000	S				0.125	0.0053
Capacitors, Fixed, Ceramic, General Purpose									
Part Number	Ref/Qty	Description	pF	Quality		Rated	Actual	Voltage	Voltage
M123A02BXC104KC	C2-C6	0.1uF, 100V, Est. Rel.	100000	S				85	50
									5
Capacitors, Fixed, Electrolytic, Tantalum, Solid									
Part Number	Ref/Qty	Description	uF	Quality		Rated	Actual	Voltage	Voltage
M39003/01-8214	C1	4.7uF, 50V, Est. Rel.	4.7	S				85	50
									5
Connector, PCB									
Part Number	Ref/Qty	Description	Active	Pin	Avg.	Temp.		Mate / Unmate	
1337748-1	P1	Receptacle, 92-Contact	31	26	0.1	0.03	Mil	per 1000 hours	
Interconnection Assemblies with Plated Through Holes									
Part Number	Ref/Qty	Description	Layers	Quality		Wave Solder	PTHs->	Hand Solder	
1337283-1	1	Printed Wiring Board	4	Mil			326	0	

TABLE A2ES-EOS-15

Microcircuits, Gate/Logic Arrays and Microprocessors						
Part Number	Ref/Qty	Description	Failure Rate	Failure Rate	Failure Rate	C2
25012/02-1	U1, U3, U5, U7	8-Bit I/O Port	0.00472	0.155682	0.5	0.0025
25012/02-1	U2, U4, U6, U8	8-Bit I/O Port	0.00472	0.155674	0.5	0.0025
25012/03-1	U9	3-to-8 Line Decoder	0.00080	0.155665	0.5	0.0025
M38510/17401SCX	U10	Hex Inverter	0.00070	0.155668	0.5	0.0025

Capacitors, Fixed, Ceramic, General Purpose						
Part Number	Ref/Qty	Description	Failure Rate	Failure Rate	Failure Rate	Failure Rate
M39014/01-1593	C1	Est. Rel., 0.1uF, 50V	1.27E-05	0.000725	1.454735	0.03

Capacitors, Fixed, Electrolytic, Tantalum						
Part Number	Ref/Qty	Description	Failure Rate	Failure Rate	Failure Rate	Failure Rate
M39003/01-8209	C2-C5	Est. Rel., 3.3uF, 50V	8.70E-05	0.004762	1.154042	0.33

Connector, PCB						
Part Number	Ref/Qty	Description	Failure Rate	Failure Rate	Failure Rate	Failure Rate
AS8137-1A2DY-0	P1	Connector	0.00099	0.000285	1.5	4.618523

Interconnection Assemblies with Plated Through Holes						
Part Number	Ref/Qty	Description	Failure Rate	Failure Rate	Failure Rate	Failure Rate
1337285-1	1	Printed Wiring Board	0.00552	1.7E-05	1.556722	1

Total Failure Rate: 0.00731

TABLE A2ES-EOS-15 (Cont.)

SIG_PROC.XLS
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors		<u>Ref/Qty</u>	<u>Description</u>	<u>Compl.</u>	<u>Tech.</u>	<u>Eg.</u>	<u>Junct.</u>	<u>θjc</u>	<u>Mfr</u>	<u>Pins</u>	<u>Years</u>	<u>Package</u>	<u>Quality</u>
<u>Part Number</u>		25012/02-1	U1, U3, U5, U7	46	Digital	0.35	35.00	175.0E-6	24	2	2	Hermetic	S
25012/02-1		U2, U4, U6, U8	8-Bit I/O Port	46	Digital	0.35	35.00	100.0E-6	24	2	2	Hermetic	S
25012/03-1		U9	3-to-8 Line Decoder	32	Digital	0.35	35.00	10.0E-6	12	16	2	Hermetic	S
M38510/17401SCX		U10	Hex Inverter	6	Digital	0.35	35.00	20.0E-6	28	14	2	Hermetic	S
Capacitors, Fixed, Ceramic, General Purpose													
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>										
M39014/01-1593	C1		Est. Rel., 0.1uF, 50V	100000	μF	85	50	5		5	5		
Capacitors, Fixed, Electrolytic, Tantalum													
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>										
M39003/01-8209	C2-C5		Est. Rel., 3.3uF, 50V	3.3	μF	85	50	5		5	5		
Connector, PCB													
AS8137-1A20Y-0	P1		<u>Description</u>		<u>Pin</u>	<u>Gauge</u>	<u>Avg.</u>	<u>Temp.</u>					
			Connector	24	26	0.1	0.03	Rise	Quality	Mill	Male / Unmate	per 1000 hours	
Interconnection Assemblies with Plated Through Holes													
<u>Part Number</u>	<u>Ref/Qty</u>		<u>Description</u>										
1337285-1	1		Printed Wiring Board	4	Layers	Quality	PTHs-> 417	Wave Solder	Hand Solder				
					Mill		0						

Total Failure Rate:

TABLE A2ES-EOS-16

Microcircuits, Gate/Logic Arrays and Microprocessors									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>II</u>	<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>C1</u>	<u>C2</u>
AS8083-27	U2	3-to-8 Line Decoder	0.00109	0.155664	0.5	0.25	1	0.01	0.005593
AS8322/11404SGX	U8, U9	JFET Input Op. Amp.	0.00151	0.227469	0.5	0.25	1	0.01	0.001499
AS8322/11005SCX	U10	Quadruple Op. Amp.	0.00117	0.227469	0.5	0.25	1	0.01	0.004841
AS8083-25	U11	CMOS Hex Inverter	0.00099	0.155664	0.5	0.25	1	0.01	0.004841
AS8322/30302SCX	U12	Triple 3-Input NOR	0.00117	0.227469	0.5	0.25	1	0.01	0.004841
AS8322/19002SCX	U13, U14	CMOS Analog Mux.	0.00711	0.227469	0.5	0.25	1	0.04	0.010235
Microcircuits, Memories									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>II</u>	<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>C1</u>	<u>C2</u>
AS8083-36	U1	HS81C55RH/Q RAM	0.00218	0.155664	0.5	0.25	1	0.0078	0.015046
Diodes									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>III</u>	<u>IS</u>	<u>IC</u>	<u>IQ</u>	<u>IE</u>
AS8301-1N6642-S	CR1-CR5	Switching Diode	0.00039	0.001	1.419685	0.156893	1	0.7	0.5
AS8301-1N6642-S	CR6, CR7	Switching Diode	5.29E-05	0.001	1.40047	0.054	1	0.7	0.5
AS8301-1N759A1S	VR1	Zener Diode, Vz=12.0	0.00158	0.002	2.258205	1	1	0.7	0.5
Transistors, Low Frequency, Bipolar									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>III</u>	<u>IA</u>	<u>IR</u>	<u>IS</u>	<u>IQ</u>
AS8302-2N2907AS	Q1, Q2	PNP General Purpose	1.65E-05	0.00074	1.265894	0.7	0.656002	0.274512	0.7
AS8302-2N2907AS	Q3 -Q6	PNP General Purpose	3.30E-05	0.00074	1.262447	0.7	0.656002	0.274512	0.7
AS8302-2N2222AS	Q7-Q9	NPN General Purpose	2.69E-05	0.00074	1.265894	0.7	0.712463	0.274512	0.7
Optoelectronics									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>III</u>	<u>IQ</u>	<u>IE</u>		
JANS4N49	U3, U4	Optical Isolator	6.92E-06	0.013	0.000292	0.7	13		
JANS4N49	U5-U7	Optical Isolator	1.04E-05	0.013	0.000292	0.7	13		
Resistors, Fixed, Composition									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>IR</u>	<u>IQ</u>	<u>IE</u>		
RCR05G101JS	R1, R7	100, 0.125W, Est. Rel.	7.80E-06	0.00065	1	0.03	0.2		
RCR05G101JS	R2, R8	100, 0.125W, Est. Rel.	7.78E-06	0.000648	1	0.03	0.2		
RCR05G101JS	R3-R6	100, 0.125W, Est. Rel.	1.58E-05	0.000657	1	0.03	0.2		
RCR05G101JS		100, 0.125W, Est. Rel.	3.89E-06	0.000648	1	0.03	0.2		

Report 9831C
March 1996

TABLE A2ES-EOS-16 (Cont.)

Resistors, Fixed, Composition		Description		Failure Rate		λ_b		$\overline{I_R}$		$\overline{I_Q}$		$\overline{I_E}$	
Part Number	Ref/Qty	Ref/Qty	Description	Failure Rate		λ_b	$\overline{I_R}$	$\overline{I_Q}$	$\overline{I_R}$	$\overline{I_Q}$	$\overline{I_E}$		
RCR05G202JS	R11, R12	2K, 0.125W, Est. Rel.	9.12E-06	0.00076	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G102JS	R13, R14	1K, 0.125W, Est. Rel.	8.96E-06	0.000746	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G512JS	R15-R17	5.1K, 0.125W, Est. Rel.	1.50E-05	0.000832	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G512JS	R18, R19	5.1K, 0.125W, Est. Rel.	7.78E-06	0.000648	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G103JS	R20, R21	10K, 0.125W, Est. Rel.	1.24E-05	0.001036	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G103JS	R22-R24	10K, 0.125W, Est. Rel.	1.17E-05	0.000648	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G106JS	R29, R30	10M, 0.125W, Est. Rel.	1.94E-05	0.000648	2.5	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G155JS	R43, R44	1.5M, 0.125W, Est. Rel.	1.24E-05	0.000648	1.6	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR05G512JS	R47, R48	5.1K, 0.125W, Est. Rel.	7.78E-06	0.000648	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RCR200G242JS	R61	2.4K, 0.5W, Est. Rel.	4.92E-06	0.000821	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
Resistors, Fixed, Film		Description		Failure Rate		λ_b		$\overline{I_R}$		$\overline{I_Q}$		$\overline{I_E}$	
Part Number	Ref/Qty	Ref/Qty	Description	Failure Rate		λ_b	$\overline{I_R}$	$\overline{I_Q}$	$\overline{I_R}$	$\overline{I_Q}$	$\overline{I_E}$		
RNC50J1002FS	R25-R28	10K, 0.05W	1.55E-05	0.000648	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RNC50J1003FS	R31, R32	100K, 0.05W	8.62E-06	0.000653	1.1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RNC50J2002FS	R33, R34	20K, 0.05W	7.78E-06	0.000648	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RNC55J2803FS	R35, R36	280K, 0.1W	8.56E-06	0.000648	1.1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RNC55J2263FS	R37, R38	226K, 0.1W	8.55E-06	0.000648	1.1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RNC55J1004FS	R39, R40	1M, 0.1W	1.24E-05	0.000648	1.6	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RNC55J2003FS	R41, R42	200K, 0.05W	8.58E-06	0.00065	1.1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RNC55J1003FS	R45, R46	100K, 0.05W	8.55E-06	0.000648	1.1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RLR05C1822FS	R49, R50	18.2K, 0.125W	9.10E-06	0.000759	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RLR05C3011FS	R51, R52	3.01K, 0.125W	8.70E-06	0.000725	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RLR05C8061FS	R53, R54	8.06K, 0.125W	8.34E-06	0.000695	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RLR05C1212FS	R55, R58	12.1K, 0.125W	8.63E-06	0.000719	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RLR05C1212FS	R56, R59	12.1K, 0.125W	8.64E-06	0.00072	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RLR05C1212FS	R57, R60	12.1K, 0.125W	8.64E-06	0.00072	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
RLR05C2202FS	R62, R63	22K, 0.125W	9.64E-06	0.00083	1	0.03	0.03	0.03	0.03	0.03	0.03	0.2	0.2
Resistors, Network, Fixed, Film		Description		Failure Rate		λ_b		$\overline{I_R}$		$\overline{I_Q}$		$\overline{I_E}$	
Part Number	Ref/Qty	Ref/Qty	Description	Failure Rate		λ_b	$\overline{I_R}$	$\overline{I_Q}$	$\overline{I_R}$	$\overline{I_Q}$	$\overline{I_E}$		
M83401K2001JA	RN1A-RN1C	2K, 0.125W	0.00011	0.00006	1.251902	3	1	0.5	1	0.5	1	0.5	0.5
M83401K1002JA	RN2A-RN2C	10K, 0.125W	0.00012	0.00006	1.2944	3	1	0.5	1	0.5	1	0.5	0.5
M83401K2001JA	RN3A-RN3C	2K, 0.125W	0.00012	0.00006	1.386908	3	1	0.5	1	0.5	1	0.5	0.5

Report 9831C
March 1996

Part Number: 1356000

Multiplexer / Relay Control Circuit Card Assembly

Schematic: 1355999

TABLE A2AES-EOS-16 (Cont.)

Capacitors, Fixed, Ceramic, General Purpose		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{CV}</u>	<u>Π_Q</u>	<u>Π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>						
M123A02BXC104KC	C3, C4, C11, C12	0.1uF, 100V, Est. Rel.	4.51E-05	0.000645	1.454735	0.03	0.4
M123A02BXC104KC	C5, C7, C9, C10	0.1uF, 100V, Est. Rel.	5.13E-05	0.000735	1.454735	0.03	0.4
M123A02BXC104KC	C6, C8	0.1uF, 100V, Est. Rel.	2.25E-05	0.000645	1.454735	0.03	0.4
Capacitors, Fixed, Electrolytic, Tantalum, Solid		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{CV}</u>	<u>Π_{SR}</u>	<u>Π_Q</u>
<u>Part Number</u>	<u>Ref/Qty</u>						
M39003/01-8066	C1	1.2uF, 20V, Est. Rel.	2.36E-05	0.0056833	1.02212	0.33	0.03
M39003/01-8282	C2	3.3uF, 75V, Est. Rel.	3.88E-05	0.0085	1.154042	0.33	0.03
M39003/01-8069	C13	1uF, 50V, Est. Rel.	2.26E-05	0.005701	1	0.33	0.03
M39003/01-8069	C14	1uF, 50V, Est. Rel.	2.26E-05	0.005701	1	0.33	0.03
M39003/01-8078	C15, C16	10uF, 20V, Est. Rel.	5.51E-05	0.005275	1.318257	0.33	0.03
Connector, PCB		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_Q</u>
1337748-1	P1	Receptacle, 92-Contact	0.00227	0.000285	1.5	10.65323	0.5
Interconnection Assemblies with Plated Through Holes		<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>
<u>Part Number</u>	<u>Ref/Qty</u>						
1356417-1	1	Printed Wiring Board	0.00909	1.7E-05	2.009781	1	0.5
Total Failure Rate:		0.02586					

TABLE A2ES-EOS-16 (Cont.)

Microcircuits, Gate/Logic Arrays and Microproc									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Comp.</u>	<u>Tech.</u>	<u>E_a</u>	<u>Junct.</u>	<u>Actual</u>	<u>θ_{jc}</u>	<u>Mfr</u>	<u>Package</u>
AS8083-27	U2	32	Digital	0.35	35.00	12	16	2	Hermetic
AS8322/11404SGX	U8, U9	29	Linear	0.65	35.00	23	7	2	Can
AS8322/1105SCX	U10	13	Linear	0.65	35.00		14	2	Hermetic
AS8083-25	U11	3	Digital	0.35	35.00	20	14	2	Hermetic
AS8322/30302SCX	U12	32	Linear	0.65	35.00	20	14	2	Hermetic
AS8322/19002SCX	U13, U14	485	Linear	0.65	35.00	18	28	2	Hermetic
Microcircuits, Memories									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>K-Bits</u>	<u>Tech./Type</u>	<u>E_a</u>	<u>Junct.</u>	<u>Actual</u>	<u>θ_{jc}</u>	<u>Mfr</u>	<u>Package</u>
AS8083-36	U1	2	MOS/RAM	0.35	35.00	9.9	40	2	Hermetic
Diodes									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Contact</u>	<u>Type/App</u>	<u>Rated Voltage</u>	<u>Junct.</u>	<u>Actual</u>	<u>θ_j</u>	<u>Mfr</u>	<u>Package</u>
AS8301-1N6642-S	CR1-CR5	Metal	Switch	75	35	35.42	3.5E-3	DO-35	JANTXV
AS8301-1N6642-S	CR6, CR7	Metal	Switch	75	10	35.00	10.0E-6	DO-35	JANTXV
AS8301-1N759A1S	VR1	Metal	V. Ref.	-	-	68.00	0.165	DO-35	JANTXV
									/127
Transistors, Low Frequency, Bipolar									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Case</u>	<u>LCM</u>	<u>Temp.</u>	<u>Power</u>	<u>Rated</u>	<u>VCE</u>	<u>Appl.</u>	<u>Quality</u>
AS8302-2N2907AS	Q1, Q2	TO-18	70	35.25	0.32	0.0035	60	35	JANTXV
AS8302-2N2907AS	Q3-Q6	TO-18	70	35.12	0.32	0.00175	60	35	JANTXV
AS8302-2N2222AS	Q7-Q9	TO-18	70	35.25	0.4	0.0035	60	35	JANTXV
Optoelectronics									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>θ_{jc}</u>	<u>Junct.</u>	<u>Rated</u>	<u>Actual</u>	<u>Rated</u>	<u>VCE</u>	<u>Appl.</u>	<u>Quality</u>
JANS4N49	U3, U4	70	35.35	0.196	0.005	70-99	JANTXV		
JANS4N49	U5-U7	70	35.35	0.196	0.005	70-99	JANTXV		
Resistors, Fixed, Composition									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Ohms</u>	<u>Power</u>	<u>Rated</u>	<u>Actual</u>	<u>Power</u>	<u>Case</u>	<u>(Lin/Sw)</u>	<u>Quality</u>
RCR05G101JS	R1, R7	100	0.125	0.0004	100	0.005	SW		S
RCR05G101JS	R2, R8	100	0.125	0.0001	100	0.005	SW		S
RCR05G101JS	R3-R6	100	0.125	0.0016	100	0.005	SW		S
RCR05G101JS		100	0.125	1.0E-6	100	0.005	SW		S

Report 9831C
March 1996

Multiplexer / Relay Control Circuit Card Assembly

Part Number: 1356000

Schematic: 1355999

TABLE A2ES-EOS-16 (Cont.)

Resistors, Fixed, Composition				Actual	
Part Number	Ref/Qty			Rated Power	Power Quality
		Ohms			
RCR05G202JS	R11, R12	2000	0.125	0.018	S
RCR05G102JS	R13, R14	1000	0.125	0.016	S
RCR05G512JS	R15-R17	5100	0.125	0.028235	S
RCR05G512JS	R18, R19	5100	0.125	0.00011	S
RCR05G103JS	R20, R21	10000	0.125	0.0529	S
RCR05G103JS	R22-R24	10000	0.125	0.000064	S
RCR05G106JS	R29, R30	10000000	0.125	100.0E-9	S
RCR05G155JS	R43, R44	1500000	0.125	1.35E-05	S
RCR05G512JS	R47, R48	5100	0.125	0.00011	S
RCR20G242JS	R61	2400	0.5	0.1067	S
Resistors, Fixed, Film				Actual	
Part Number	Ref/Qty			Rated Power	Power Quality
		Ohms			
RNC50J1002FS	R25-R28	10000	0.05	25.0E-6	S
RNC50J1003FS	R31, R32	100000	0.05	0.00036	S
RNC50J2002FS	R33, R34	20000	0.05	0.00005	S
RNC55J2803FS	R35, R36	280000	0.1	0.000112	S
RNC55J2263FS	R37, R38	226000	0.1	226.0E-9	S
RNC55J1004FS	R39, R40	1000000	0.1	16.0E-6	S
RNC55J2003FS	R41, R42	200000	0.1	0.00032	S
RNC55J1003FS	R45, R46	100000	0.1	1E-07	S
RLR05C1822FS	R49, R50	18200	0.125	0.01784	S
RLR05C3011FS	R51, R52	3010	0.125	0.01273	S
RLR05C8061FS	R53, R54	8060	0.125	0.007933	S
RLR05C1212FS	R55, R58	12100	0.125	0.01186	S
RLR05C1212FS	R56, R59	12100	0.125	0.01191	S
RLR05C1212FS	R57, R60	12100	0.125	0.01192	S
RLR05C2202FS	R62, R63	22000	0.125	0.024255	S
Resistors, Network, Fixed, Film				Actual	
Part Number	Ref/Qty			Rated Power	Power Quality
		Ohms			
M83401K2001JA	RN1A-RN1C	2000	0.2	5.3E-6	S
M83401K1002JA	RN2A-RN2C	10000	0.2	0.00276	S
M83401K2001JA	RN3A-RN3C	2000	0.2	8.50E-03	S

TABLE A2ES-EOS-16 (Cont.)

48 of 62

Capacitors, Fixed, Ceramic, General Purpose		<u>Ref/Qty</u>	<u>pF</u>	<u>Rated Temp.</u>	<u>Rated Voltage</u>	<u>Actual Voltage</u>	<u>Quality</u>
M123A02BXC104KC	C3, C4, C11, C12	1000000	125	100	5	5	S
M123A02BXC104KC	C5, C7, C9, C10	1000000	125	100	15.75	5	S
M123A02BXC104KC	C6, C8	1000000	125	100	5	5	S
Capacitors, Fixed, Electrolytic, Tantalum, Solid		<u>Ref/Qty</u>	<u>µF</u>	<u>Rated Temp.</u>	<u>Rated Voltage</u>	<u>Actual Voltage</u>	<u>Quality</u>
M39003/01-8066	C1	1.2	85	20	5	5	S
M39003/01-8282	C2	3.3	85	75	28	28	S
M39003/01-8069	C13	1	85	50	12	12	S
M39003/01-8069	C14	1	85	50	12	12	S
M39003/01-8078	C15, C16	10	85	20	4	4	S
Connector, PCB		<u>Ref/Qty</u>	<u>Active Pins</u>	<u>Pin Gauge</u>	<u>Avg. Current</u>	<u>Temp. Rise</u>	<u>Mate / Unmate per 1000 hours</u>
1337748-1	P1	55	26	0.1	0.03	0.03 Mil	0.5
Interconnection Assemblies with Plated Through Holes		<u>Ref/Qty</u>	<u>Layers</u>	<u>Quality Mil</u>	<u>PTHs > Wave Solder</u>	<u>Hand Solder</u>	
1356417-1	1	6			532	0	

TABLE A2ES-EOS-17

Microcircuits, Gate/Logic Arrays and Microprocessors		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>	<u>C1</u>	<u>C2</u>		
<u>Part Number</u>	<u>U1, U3, U5, U7</u>				<u>0.155665</u>	<u>0.25</u>	<u>1</u>	<u>0.0025</u>		
26043-16	U2, U4, U6, U8	Quad, Clocked 'D' Latch		0.00319	0.155665	0.25	1	0.0025		
M38510R05451SEX	U34-U36	Inverting Hex Buffer		0.00319	0.155665	0.25	1	0.0025		
M38510R0553SEX	U9, U15, U26	Inverting Hex Buffer		0.00239	0.156141	0.25	1	0.0025		
M38510R0553SEX	U37	Inverting Hex Buffer		0.00239	0.155855	0.25	1	0.0025		
M38510R0554SEX	U30	Noninverting Hex Buffer		0.00070	0.155855	0.25	1	0.0025		
26122-1	U10, U16, U21, U27	Digital-to-Analog Converter		0.00284	0.155674	0.25	1	0.0025		
M38510R30203SCX	U31-U33	Quad 2-Input NAND Buffer		0.00291	0.1957	0.25	1	0.0025		
M38510R17401SCX	AR1, AR2	Hex Inverter		0.00211	0.155665	0.25	1	0.0025		
M38510R10101SGX		Operational Amplifier		0.00187	0.275668	0.25	1	0.01		
Optoelectronics		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{1}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>		
<u>Part Number</u>					<u>0.013</u>	<u>0.00029</u>	<u>0.7</u>	<u>13</u>		
Resistors, Fixed, Film		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{1}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>		
<u>Part Number</u>					<u>6.77E-05</u>	<u>0.000752</u>	<u>1</u>	<u>0.03</u>		
RLR05C1101FS	R1-R14, R38	Est. Rel., 1.1K, 0.125W		<u>Failure Rate</u>	<u>$\frac{1}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>		
RLR05C3321FS	R15-R28, R39	Est. Rel., 3.32K, 0.125W			<u>6.25E-05</u>	<u>0.000694</u>	<u>1</u>	<u>0.03</u>		
RLR05C1002FS	R29	Est. Rel., 10K, 0.125W			<u>4.64E-06</u>	<u>0.000773</u>	<u>1</u>	<u>0.03</u>		
1333073-3	R32, R35-R37	Kit, 1K to 10K, 0.125W			<u>1.56E-05</u>	<u>0.000648</u>	<u>1</u>	<u>0.03</u>		
RNC05D2001FS	R33	10K, 0.1W, Est. Rel.			<u>3.89E-06</u>	<u>0.000648</u>	<u>1</u>	<u>0.03</u>		
1333073-2	R34	Kit, 10K to 52.3K, 0.125W			<u>3.89E-06</u>	<u>0.000648</u>	<u>1</u>	<u>0.03</u>		
Capacitors, Fixed, Ceramic, General Purpose		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{1}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>		
<u>Part Number</u>					<u>5.06E-05</u>	<u>0.000724</u>	<u>1.45473</u>	<u>0.03</u>		
Capacitors, Fixed, Electrolytic, Tantalum, Solid		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>$\frac{1}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>		
<u>Part Number</u>					<u>0.00015</u>	<u>0.006706</u>	<u>0.75858</u>	<u>0.33</u>		
M39003/01-8194	C1-C3	1uF, 50V, Est. Rel.		<u>Failure Rate</u>	<u>$\frac{1}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>	<u>$\frac{\Pi}{b}$</u>		
M39003/01-8053	C4, C6	22uF, 15V, Est. Rel.			<u>0.00022</u>	<u>0.007568</u>	<u>1.44907</u>	<u>0.33</u>		
M39003/01-8111	C8, C10	22uF, 35V, Est. Rel.			<u>0.00030</u>	<u>0.010571</u>	<u>1.44907</u>	<u>0.33</u>		

Report 9831C
March 1996

TABLE A2ES-EOS-17 (Cont.)

SIG PROC.xls
03/13/1996

<u>Connector, PCB</u>	<u>Qty/Ref</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>ΣK</u>	<u>ΣP</u>	<u>ΣE</u>
1337748-1	P1	Receptacle, 92-Contact	0.000175	0.000285	1.5	8.21595	0.5
Interconnection Assemblies with Plated Through Holes							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>ΣC</u>	<u>ΣQ</u>	<u>ΣE</u>
1337296-1	1	Printed Wiring Board	0.01042	1.7E-05	1.79170	1	0.5
Total Failure Rate: <u>0.03492</u>							

TABLE A2ES-EOS-17 (Cont.)

Microcircuits, Gate/Logic Arrays and Microproc						Ref/Qty	Comp.	Tech.	E_B	Junct.	θ_{jc}	Mfr	Pins	Years	Package	Quality				
Part Number	Ref/Qty	U1, U3, U5, U7	U2, U4, U6, U8	U34-U36	U9, U15, U26	U37	U30	U10, U16, U21, U27	U31-U33	AR1, AR2										
26043-16				31	Digital	0.35	35.00	5.1E-6	28	16	2	Hermetic	S							
M38510R05451SEX				6	Digital	0.35	35.00	5.1E-6	28	16	2	Hermetic	S							
M38510/05553SEX				6	Digital	0.35	35.07	2.6E-3	28	16	2	Hermetic	S							
M38510/05553SEX				6	Digital	0.35	35.03	1.0E-3	28	16	2	Hermetic	S							
M38510R05554SEX				6	Digital	0.35	35.03	1.0E-3	28	14	2	Hermetic	S							
26122-1				1000	Linear	0.35	35.00	51.0E-6	28	28	2	Hermetic	S							
M38510/30203SCX				4	Digital	0.5	35.64	23.0E-3	28	14	2	Hermetic	S							
M38510R17401SCX				6	Digital	0.35	35.00	5.1E-6	28	14	2	Hermetic	S							
M38510/10101SGX				23	Linear	0.65	37.44	87.0E-3	28	8	2	Can	S							
Optoelectronics						θ_{jc}	Junct.	Rated	Actual	Power	Package	Quality								
Part Number	Ref/Qty			Ref/Qty	Temp.	θ_{jc}	Junct.	Rated	Actual	Power	Package	Quality								
JANS4N49	17				70			35.35	0.196	0.005	TQ-99	TQ-99	JANTXV							
Resistors, Fixed, Film						Ref/Qty	Ohms	Rated	Actual	Power	Package	Quality								
Part Number						Ref/Qty	Ohms	Rated	Actual	Power	Package	Quality								
RLR05C1101FS						R1-R14, R38	1100	0.125	0.0168	S										
RLR05C3321FS						R15-R28, R39	3320	0.125	0.0078	S										
RLR05C1002FS						R29	10000	0.125	0.02	S										
1333073-3						R32, R35-R37	5500	0.125	0.0001	S										
RNC05D2001FS						R33	2000	0.1	0.0001	S										
1333073-2						R34	31150	0.125	0.0001	S										
Capacitors, Fixed, Ceramic, General Purpose						Ref/Qty	pF	Rated	Rated	Voltage	Quality	Voltage	Actual							
Part Number	Ref/Qty						Ref/Qty	Temp.	Rated	Voltage	Quality	Voltage								
M39014/02-1350							C5, C7, C9, C11	100000	125	100	S	S	15.1							
Capacitors, Fixed, Electrolytic, Tantalum, Solid						Ref/Qty	μF	Rated	Rated	Voltage	Quality	Voltage	Actual	Ohms						
Part Number	Ref/Qty						Ref/Qty	Temp.	Rated	Voltage	Quality	Voltage	Actual	Ohms						
M39003/01-8194	C1-C3						0.1	85	50	15.1	S	S								
M39003/01-8053	C4, C6						22	85	15	5.1	S	S								
M39003/01-8111	C8, C10						22	85	35	15.1	S	S								

TABLE A2ES-EOS-17 (Cont.)

SIG_PROC.xls
03/13/1996

<u>Connector, PCB</u>	<u>Qty/Ref</u>	<u>Pins</u>	<u>Gauge</u>	<u>Current</u>	<u>Rise</u>	<u>Quality</u>	<u>Mate / Unmate</u>
1337748-1	P1	44	26	0.1	0.03	Mil	0.5
Interconnection Assemblies with Plated Through Holes							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Layers</u>	<u>Quality</u>	<u>PTHs-></u>	<u>Wave Solder</u>	<u>Hand Solder</u>	
1337296-1	1	5	Mil	PTHs->	684	0	

TABLE A2ES-EOS-18

Microcircuits, Gate/Logic Arrays and Microprocessors					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>
26056-1	U23	Timer	0.00090	0.227661	0.25
M38510/30203SCX	U1-U4	Quadtriple NAND Buffer	0.00289	0.18823	0.25
M38510/11201SCX	U19-U22	Quad. Voltage Comparator	0.00256	0.158012	0.25
Diodes, Low Frequency					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>
JANS1N4148-1	CR1	Switching Diode	2.65E-05	0.001	1.402998
Optoelectronics					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>
JANS4N49	U5-U18	Optical Isolator	0.00024	0.013	0.000292
Resistors, Fixed, Film					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>
RLR05C1101FS	R1-R14	1100 ohms, 1%, 0.125W	6.66E-05	0.000792	1
RLR07C5110FS	R15	511 ohms, 1%, 0.25W	4.83E-06	0.000805	1
RNR81S1000FS	R16-R29	100 ohms, 1%, 1W	7.20E-05	0.000858	1
RLR07C5110FS	R30	511 ohms, 1%, 0.25W	4.83E-06	0.000805	1
RLR07C5110FS	R31	511 ohms, 1%, 0.25W	3.97E-06	0.000662	1
RNC05J1002FS	15	10K, 1%, 0.125W	6.58E-05	0.000731	1
RLR50U2491FS	15	2.49K, 1%, 0.125W	5.85E-05	0.00065	1
RLR05C3321FS	R62-R76	3.32K, 1%, 0.125W	6.23E-05	0.000692	1
1331073-15	R77	Kit, 15.4K to 36.5K, 1%, 0.05W	4.81E-06	0.000802	1
Capacitors, Fixed, Ceramic, General Purpose					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>
M39014/02-1350	C3, C4	Est. Rel., 0.1uF, 100V	2.45E-05	0.000703	1.454735
Capacitors, Fixed, Electrolytic, Tantalum, Solid					
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>
M39003/01-8053	C1, C2	Est. Rel., 22uF, 15V	0.00021	0.007402	1.449075

TABLE A2ES-EOS-18 (Cont.)

Inductive Devices, Transformers			
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>
1335677-1	T1	Pulse Type	0.00193
Connector, PCB	<u>Qty/Ref</u>	<u>Description</u>	<u>Failure Rate</u>
1337748-1	P1	Receptacle, 92-Contact	0.00175
Interconnection Assemblies with Plated Through Holes			
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>
1337290-1	1	Printed Wiring Board	0.00627

Total Failure Rate: 0.01716Report 9831C
March 1996

TABLE A2ES-EOS-18 (Cont.)

Microcircuits, Gate/Logic Arrays and						<u>Mfr</u>	<u>Years</u>	<u>Package</u>	<u>Quality</u>
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Comp.</u>	<u>Tech.</u>	<u>Ea</u>	<u>Temp.</u>	<u>Watts</u>	<u>(°C/W)</u>	<u>Pins</u>	
26056-1	U23	23	Linear	0.65	35.01	0.0001	106	8	Hermetic S
M38510/30203SCX	U1-U4	4	Digital	0.5	35.01	0.0001	50	14	Hermetic S
M38510/11201SCX	U19-U22	29	Linear	0.35	35.35	0.01	35	8	Can S
Diodes, Low Frequency									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Contact</u>	<u>Type/App</u>	<u>Rated</u>	<u>Applied</u>	<u>Junct.</u>	<u>θjc</u>	<u>θCM</u>	<u>Quality</u>
JANS1N4148-1	CR1	Metal	Switch	75	5	35.05	0.005	10	DO-35 JANTXV
Optoelectronics									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>θjc</u>	<u>Junct.</u>	<u>Rated</u>	<u>Actual</u>	<u>Temp.</u>	<u>Watts</u>	<u>θCM</u>	<u>Case</u>
JANS4N49	U5-U18	70	Temp.	0.196	0.025	70-99	0.005	10	DO-35 JANTXV
Resistors, Fixed, Film									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Ref</u>	<u>Ohms</u>	<u>Rated</u>	<u>Actual</u>	<u>Power</u>	<u>Power</u>	<u>θCM</u>	<u>Quality</u>
RLR05C1101FS	R1-R14	1100	0.125	0.02273	0.02273	S	S	S	S
RLR07C5110FS	R15	511	0.25	0.049	0.049	S	S	S	S
RNR81S1000FS	R16-R29	100	1	0.16	0.16	S	S	S	S
RLR07C5110FS	R30	511	0.25	0.049	0.049	S	S	S	S
RLR07C5110FS	R31	511	0.25	0.005	0.005	S	S	S	S
RNC05J1002FS	15	10000	0.1	0.0016	0.0016	S	S	S	S
RLR50J2491FS	15	2490	0.125	0.0004	0.0004	S	S	S	S
RLR05C3321FS	R62-R76	3320	0.125	0.00753	0.00753	S	S	S	S
1331073-15	R77	25950	0.05	0.005	0.005	S	S	S	S
Capacitors, Fixed, Ceramic, General									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>pF</u>	<u>Rated</u>	<u>Temp.</u>	<u>Actual</u>	<u>Voltage</u>	<u>Voltage</u>	<u>θCM</u>	<u>Quality</u>
M39014/02-1350	C3, C4	100000	85	100	5	5	5	S	S
Capacitors, Fixed, Electrolytic, Tantal									
<u>Part Number</u>	<u>Ref/Qty</u>	<u>μF</u>	<u>Rated</u>	<u>Temp.</u>	<u>Actual</u>	<u>Voltage</u>	<u>Voltage</u>	<u>θCM</u>	<u>Quality</u>
M39003/01-8053	C1, C2	22	85	15	5	5	5	S	S

TABLE A2ES-EOS-18 (Cont.)

Inductive Devices, Transformers							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Hot Spot</u>	<u>ΔT</u>	<u>Type</u>	<u>Quality</u>	<u>Mil-T-27 and Mil-T-21308, Insul Q</u>	<u>Max Temp=85°C</u>
1335677-1	T1	35	5	Pulse	Mil	and Mil-T-55631, Insul O	
Connector, PCB	<u>Qty/Ref</u>	<u>Active Pins</u>	<u>Pin Gauge</u>	<u>Avg. Current</u>	<u>Temp. Rise</u>	<u>Quality</u>	<u>Mate / Unmate per 1000 hours</u>
1337748-1	P1	44	26	0.1	0.03	Mil	0.5
Interconnection Assemblies with Plat							
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Layers</u>	<u>Quality</u>	<u>PTHs-></u>	<u>Wave Solder</u>	<u>Hand Solder</u>	
1337290-1	1	4	Mil	474	0		

TABLE A2ES-EOS-19

Microcircuits, Gate/Logic Arrays and Microprocessors		Description		Failure Rate		<u>IE</u>		<u>IL</u>		<u>C1</u>		<u>C2</u>	
<u>Part Number</u>	<u>Ref/Qty</u>												
26026-1	U1	Resistance-to-Digital Converter	0.00279	0.984653	0.5	0.25	1	0.01	0.002645				
M38510/31004SCX	U2-U5	Quad 2-Input AND Gate	0.00295	0.211263	0.5	0.25	1	0.0025	0.004841				
26056-1	U6	Timer	0.00107	0.294579	0.5	0.25	1	0.01	0.002645				
M38510/13501SCX	AR1-AR4	Operational Amplifier	0.00710	0.611512	0.5	0.25	1	0.01	0.00196				
M38510/13501SCX	AR5, AR6	Operational Amplifier	0.00248	0.398001	0.5	0.25	1	0.01	0.00196				
M38510/13501SCX	AR7, AR8	Operational Amplifier	0.00236	0.374488	0.5	0.25	1	0.01	0.00196				
M38510/10304SGX	AR9	Operational Amplifier	0.00093	0.27457	0.5	0.25	1	0.01	0.00196				
M38510/10101SCX	AR10	Operational Amplifier	0.00140	0.462824	0.5	0.25	1	0.01	0.00196				
M38510/10101SCX	AR11	Operational Amplifier	0.00140	0.462824	0.5	0.25	1	0.01	0.00196				
M38510/10101SCX	AR12	Operational Amplifier	0.00170	0.580039	0.5	0.25	1	0.01	0.00196				
26055-1	AR13	Operational Amplifier	0.00341	1.264673	0.5	0.25	1	0.01	0.00196				
M38510/10101SCX	AR14	Operational Amplifier	0.00118	0.374488	0.5	0.25	1	0.01	0.00196				
Diodes, Low Frequency													
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>b</u>	<u>ab</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>
JANS1N4148-1	CR3, CR4	Switching Diode	5.31E-05	0.001	1.404984	0.054	1	0.7	0.5	0.5	0.5	0.5	0.5
JANS1N6117A	CR1, CR2	Transient Suppressor, (Bidir.)	0.00262	0.001	3.749851	1	1	0.7	0.5	0.5	0.5	0.5	0.5
26041-6161A	CR5	Transient Suppressor, (Bidir.)	0.00197	0.001	5.616726	1	1	0.7	0.5	0.5	0.5	0.5	0.5
26042-751A-1	VR1	Zener Diode, Vz=5.1	0.00087	0.002	1.242706	1	1	0.7	0.5	0.5	0.5	0.5	0.5
Resistors, Fixed, Film													
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>a</u>	<u>ab</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>	<u>bb</u>
RLLR05C3321FS	R2-R16	Est. Rel., 3.32K	0.00011	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
RLLR05C3321FS	R65	Est. Rel., 3.32K	7.56E-06	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
RLLR05C3321FS	R68, R69	Est. Rel., 3.32K	1.51E-05	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
RLLR20C1101FS	R61	Est. Rel., 1.10K	7.56E-06	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
1331073-2	R21, R22, R29	Kit, 1K to 10K	2.27E-05	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
1331073-2	R30, R59, R60	Kit, 1K to 10K	2.27E-05	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
1331073-2	R66, R67	Kit, 1K to 10K	1.51E-05	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
RLLR07C10R0FS	R82, R83	Est. Rel., 10, .25W	1.51E-05	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
RLLR07C1002FS	R85	Est. Rel., 10K, .25W	7.56E-06	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
1331073-22	R33	Kit	7.56E-06	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
1331073-23	R34, R35	Kit	1.51E-05	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
1331073-24	R40	Kit	7.56E-06	0.00126	1	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03

Report 9831C
March 1996

TABLE A2ES-EOS-19 (Cont.)

<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>$\overline{\lambda}_R$</u>	<u>$\overline{\lambda}_E$</u>	<u>$\overline{\lambda}_Q$</u>
1331073-25	R41, R42	Kit	1.51E-05	0.00126	1	0.03	0.2
1331073-26	R46	Kit	7.56E-06	0.00126	1	0.03	0.2
1331073-27	R47, R48	Kit	1.51E-05	0.00126	1	0.03	0.2
1331073-28	R63	Kit	7.56E-06	0.00126	1	0.03	0.2
RNC50J1002FS	R23-R28	Est. Rel., 10K	5.03E-05	0.001398	1	0.03	0.2
RNC50J1002FS	R65	Est. Rel., 10K	8.39E-06	0.001398	1	0.03	0.2
RNC50J1002FS	R68, R69	Est. Rel., 10K	1.68E-05	0.001398	1	0.03	0.2
RNC50J1002FS	R61	Est. Rel., 10K	8.39E-06	0.001398	1	0.03	0.2
RNC50J1002FS	R55	Est. Rel., 10K, .05W	8.39E-06	0.001398	1	0.03	0.2
RNC50J1002FS	R62	Est. Rel., 10K, .05W	8.39E-06	0.001398	1	0.03	0.2
RNC50J1002FS	R81	Est. Rel., 10K, .05W	8.39E-06	0.001398	1	0.03	0.2
RNC50J1002FS	R86	Est. Rel., 10K, .05W	8.39E-06	0.001398	1	0.03	0.2
RNC50J1002FS	R87	Est. Rel., 10K, .05W	8.39E-06	0.001398	1	0.03	0.2
1331073-12	R70, R71	Kit, 90.9K to 110K	1.84E-05	0.001398	1.1	0.03	0.2
1331073-13	R84	Kit, 7K to 18.2K	8.39E-06	0.001398	1	0.03	0.2
1331073-11	R58	Kit, 6K to 34K	8.39E-06	0.001398	1	0.03	0.2
RNC50J1213FS	R79	Est. Rel., 121K	9.22E-06	0.001398	1.1	0.03	0.2
1331073-17	R19	Resistor, Kit, 38.3K to 78.7K	8.39E-06	0.001398	1	0.03	0.2
1331073-17	R20	Resistor, Kit, 38.3K to 78.7K	8.39E-06	0.001398	1	0.03	0.2
RNC50J2002FS	R51	Est. Rel., 20K	8.39E-06	0.001398	1	0.03	0.2
RNC50J2002FS	R54	Est. Rel., 20K	8.39E-06	0.001398	1	0.03	0.2
RNC50J2002FS	R80	Est. Rel., 20K	8.39E-06	0.001398	1	0.03	0.2
RNC50J111FS	R17, R19, R56	Est. Rel., 5.11K	2.52E-05	0.001398	1	0.03	0.2
RNC50J2001FS	R57	Est. Rel., 2K	8.39E-06	0.001398	1	0.03	0.2
RNC50J2492FS	R72, R74	Est. Rel., 24.9K	1.68E-05	0.001398	1	0.03	0.2
RNC50J2492FS	R76, R78	Est. Rel., 24.9K	1.68E-05	0.001398	1	0.03	0.2
RNC50J1003FS	R73, R77	Est. Rel., 100K	1.84E-05	0.001398	1.1	0.03	0.2
RNC50J1542FS	R75	Est. Rel., 15.4K	8.39E-06	0.001398	1	0.03	0.2
RNC50J4532FS	R37, R44	Est. Rel., 45.3K	1.68E-05	0.001398	1	0.03	0.2
RNC50J3921FS	R32, R45	Est. Rel., 3.92K	1.68E-05	0.001398	1	0.03	0.2
RNC50J5491FS	R38	Est. Rel., 5.49K	8.39E-06	0.001398	1	0.03	0.2
RNC50J1001FS	R39	Est. Rel., 1.00K	8.39E-06	0.001398	1	0.03	0.2
RNC50J1004FS	R64	Est. Rel., 100M	1.34E-05	0.001398	1.6	0.03	0.2
RNC50J4122FS	R50	Est. Rel., 41.2K	8.39E-06	0.001398	1	0.03	0.2

TABLE A2ES-EOS-19 (Cont.)

Resistors, Fixed, Wirewound, Power		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_R</u>	<u>Π_Q</u>	<u>Π_E</u>
<u>Part Number</u>	R1		Est. Rel., 5.11, 2W	2.53E-05	0.00421	1	0.03	0.2
Capacitors, Fixed, Ceramic, General Purpose								
<u>Part Number</u>	<u>Ref/Cty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{CV}</u>	<u>Π_Q</u>	<u>Π_E</u>	
M39014/02-1350	C2,C4,C6,C8,C23	Est. Rel., 0.1uF, 100V	0.00050	0.005781	1.454735	0.03	0.4	
M39014/02-1358	C30	Est. Rel., 0.1uF, 50V	0.00012	0.005781	1.658901	0.03	0.4	
M39014/02-1593	C9, C16	Est. Rel., 0.33uF, 50V	0.00020	0.005781	1.454735	0.03	0.4	
M39014/01-1575	C25	Est. Rel., 0.01uF, 100V	7.83E-05	0.005781	1.129234	0.03	0.4	
Capacitors, Fixed, Electrolytic, Tantalum, Solid								
<u>Part Number</u>	<u>Ref/Cty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_{CV}</u>	<u>Π_Q</u>	<u>Π_E</u>	
M39003/01-8194	C1,C22	Est. Rel., 0.1uF, 50V	0.00196	0.020512	3.981072	0.03	0.4	0.33
M39003/01-8053	C3, C20	Est. Rel., 22uF, 15V	0.00374	0.020512	7.604851	0.03	0.4	0.33
M39003/01-8111	C5, C7	Est. Rel., 22uF, 35V	0.00374	0.020512	7.604851	0.03	0.4	0.33
M123A01BXB103KC	C21	0.01uF, 50V	0.00106	0.029286	3.019952	0.03	0.4	0.33
M23269/03-7067	C24	4700pF, 100V	0.00097	0.029286	2.758365	0.03	0.4	0.33
M83421/01-2047S	C26-C29, C31	3300pF, 50V	0.00465	0.029286	2.643758	0.03	0.4	0.33
M87217/01-1111A	C12, C15, C19	0.02uF, 30V	0.00346	0.029286	3.281887	0.03	0.4	0.33
M87217/01-1087A	6	0.01uF, 30V	0.00637	0.029286	3.019952	0.03	0.4	0.33
Connector, PCB								
1337748-1	P1	Receptacle, 92-Contact	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_E</u>	
Interconnection Assemblies with Plated Through Holes								
<u>Part Number</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_C</u>	<u>Π_Q</u>	<u>Π_E</u>	
1337738	B1	Printed Wiring Board	0.01085	1.7E-05	2.009781	1	0.5	
Connections								
Hand Solder, with Wrapping	98	Select-At-Test Resistors	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_Q</u>	<u>Π_E</u>		
			0.00686	0.00014	1	0.5		
Total Failure Rate: <u>0.08332</u>								

Report 9831C
March 1996

TABLE A2ES-EOS-19 (Cont.)

<u>Microcircuits, Gate/Logic Arrays and Microprocessors</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Comp.</u>	<u>Tech.</u>	<u>E_a</u>	<u>Junct.</u>	<u>Temp.</u>	<u>Watts</u>	<u>θ_{jc}</u>	<u>L(CAW)</u>	<u>Pins</u>	<u>Mfr</u>	<u>Years</u>	<u>Package</u>	<u>Quality</u>
26026-1	U1	Resistance-to-Digital Converter	100	Linear	0.65	54.60	0.28	.70	8		2		2	Hermetic	S
M38510/31004SCX	U2-U5	Quad 2-Input AND Gate	4	Digital	0.5	36.90	0.068	.28	14		2		2	Hermetic	S
26056-1	U6	Timer	23	Linear	0.65	38.29	0.031	.106	8		2		2	Hermetic	S
M38510/13501SCX	AR1-AR4	Operational Amplifier	23	Linear	0.65	47.96	0.162	.80	8		2		2	Can	S
M38510/13501SCX	AR5, AR6	Operational Amplifier	23	Linear	0.65	42.20	0.09	.80	8		2		2	Can	S
M38510/3501SCX	AR7, AR8	Operational Amplifier	23	Linear	0.65	41.40	0.08	.80	8		2		2	Can	S
M38510/10304SGX	AR9	Operational Amplifier	23	Linear	0.65	37.39	0.053	.45	8		2		2	Can	S
M38510/10101SCX	AR10	Operational Amplifier	23	Linear	0.65	44.20	0.115	.80	8		2		2	Can	S
M38510/10101SCX	AR11	Operational Amplifier	23	Linear	0.65	44.20	0.115	.80	8		2		2	Can	S
M38510/10101SCX	AR12	Operational Amplifier	23	Linear	0.65	47.24	0.153	.80	8		2		2	Can	S
26055-1	AR13	Operational Amplifier	23	Linear	0.65	58.20	0.29	.80	8		2		2	Can	S
M38510/10101SCX	AR14	Operational Amplifier	23	Linear	0.65	41.40	0.08	.80	8		2		2	Can	S
Diodes, Low Frequency															
Part Number	Ref/Qty	Description	Contact	Appl. Voltage	Voltage	Voltage	Temp.	Watts	Watts	Watts	Watts	Watts	Watts	Case	Quality
JANS1N4148-1	CR3, CR4	Switching Diode	Metal	Switch	75	20	35.1	0.01	10					DO-35	JANTXV /116
JANS1N6117A	CR1, CR2	Transient Suppressor, (Bidir.)	Metal	T. Sup.	41.6	28.5		68.516	0.4788	70				Axial-5	JANTXV /516
26041-6161A	CR5	Transient Suppressor, (Bidir.)	Metal	T. Sup.	89.3	58.9		84.476	0.7068	70				Axial-5	JANTXV /516
26042-751A-1	VR1	Zener Diode, Vz=5.1	Metal	V. Ref.	n/a	n/a		35.373	0.0373	10				DO-35	JANTXV
Resistors, Fixed, Film															
Part Number	Ref/Qty	Description		Rated	Applied	Voltage	Junct.	θ _{jc}	θ _{ic}						
RLR05C3321FS	R2-R16	Est. Rel., 3.32K		3320	0.125	0.075									
RLR05C3321FS	R65	Est. Rel., 3.32K		3320	0.125	0.075									
RLR05C3321FS	R68, R69	Est. Rel., 3.32K		3320	0.125	0.075									
RLR20C1101FS	R61	Est. Rel., 1.10K		1100	0.5	0.3									
1331073-2	R21, R22, R29	Kit, 1K to 10K		5500	0.25	0.15									
1331073-2	R30, R59, R60	Kit, 1K to 10K		5500	2	1.2									
1331073-2	R66, R67	Kit, 1K to 10K		5500	2	1.2									
RLR07C10R0FS	R82, R83	Est. Rel., 10, .25W		10	0.25	0.15									
RLR07C1002FS	R85	Est. Rel., 10K, .25W		10000	0.25	0.15									
1331073-22	R33	Kit		0.125	0.075										
1331073-23	R34, R35	Kit		0.125	0.075										
1331073-24	R40	Kit		0.125	0.075										

TABLE A2ES-EOS-19 (Cont.)

<u>Resistors, Fixed, Film</u>	<u>Ref/Qty</u>	<u>Description</u>	<u>Ohms</u>	<u>Rated Power</u>	<u>Actual Power</u>	<u>Quality</u>
1331073-25	R41, R42	Kit		0.125	0.075	S
1331073-26	R46	Kit		0.125	0.075	S
1331073-27	R47, R48	Kit		0.125	0.075	S
1331073-28	R63	Kit		0.125	0.075	S
RNC50J1002FS	R23-R28	Est. Rel., 10K	10000	0.05	0.03	S
RNC50J1002FS	R65	Est. Rel., 10K	10000	0.05	0.03	S
RNC50J1002FS	R68, R69	Est. Rel., 10K	10000	0.05	0.03	S
RNC50J1002FS	R61	Est. Rel., 10K	10000	0.05	0.03	S
RNC50J1002FS	R55	Est. Rel., 10K, .05W	10000	0.05	0.03	S
RNC50J1002FS	R62	Est. Rel., 10K, .05W	10000	0.05	0.03	S
RNC50J1002FS	R81	Est. Rel., 10K, .05W	10000	0.05	0.03	S
RNC50J1002FS	R86	Est. Rel., 10K, .05W	10000	0.05	0.03	S
RNC50J1002FS	R87	Est. Rel., 10K, .05W	10000	0.05	0.03	S
1331073-12	R70, R71	Kit, 90.9K to 110K	100450	0.125	0.075	S
1331073-13	R84	Kit, 7K to 18.2K	12600	0.125	0.075	S
1331073-11	R58	Kit, 6K to 34K	20000	0.125	0.075	S
RNC50J1213FS	R79	Est. Rel., 121K	121000	0.05	0.03	S
1331073-17	R19	Resistor, Kit, 38.3K to 78.7K	58500	0.1	0.06	S
1331073-17	R20	Resistor, Kit, 38.3K to 78.7K	58500	0.1	0.06	S
RNC50J2002FS	R51	Est. Rel., 20K	20000	0.05	0.03	S
RNC50J2002FS	R54	Est. Rel., 20K	20000	0.05	0.03	S
RNC50J2002FS	R80	Est. Rel., 20K	20000	0.05	0.03	S
RNC50J5111FS	R17, R19, R56	Est. Rel., 5.11K	5110	0.1	0.06	S
RNC50J2001FS	R57	Est. Rel., 2K	2000	0.05	0.03	S
RNC50J2492FS	R72, R74	Est. Rel., 24.9K	24900	0.05	0.03	S
RNC50J2492FS	R76, R78	Est. Rel., 24.9K	24900	0.05	0.03	S
RNC50J1003FS	R73, R77	Est. Rel., 100K	100000	0.05	0.03	S
RNC50J1542FS	R75	Est. Rel., 15.4K	15400	0.05	0.03	S
RNC50J4532FS	R37, R44	Est. Rel., 45.3K	45300	0.05	0.03	S
RNC50J3921FS	R32, R45	Est. Rel., 3.92K	3920	0.05	0.03	S
RNC50J5491FS	R38	Est. Rel., 5.49K	5490	0.05	0.03	S
RNC50J1001FS	R39	Est. Rel., 1.00K	1000	0.05	0.03	S
RNC50J1004FS	R64	Est. Rel., 100M	1.0E+6	0.05	0.03	S
RNC50J4122FS	R50	Est. Rel., 41.2K	41200	0.05	0.03	S

TABLE A2ES-EOS-19 (Cont.)

Resistors, Fixed, Wirewound, Power		Description		Rated Power		Actual Power	
Part Number	Ref/Qty			Ohms	2	0.0104	\$
RWR80S5R11FS	R1	Est. Rel., 5.11, 2W		5.11			
Capacitors, Fixed, Ceramic, General Purpose							
Part Number	Ref/Qty	Description		pF	Temp.	Voltage	Quality
M39014/02-1350	C2,C4,C6,C8,C23	Est. Rel., 0.1uF, 100V		100000	125	60	S
M39014/02-1358	C30	Est. Rel., 0.1uF, 50V		330000	125	30	S
M39014/02-1593	C9, C16	Est. Rel., 0.33uF, 50V		100000	125	30	S
M39014/01-1575	C25	Est. Rel., 0.01uF, 100V		10000	125	60	S
Capacitors, Fixed, Electrolytic, Tantalum, Solid							
Part Number	Ref/Qty	Description		pF	Series	Rated Temp.	Actual Voltage
M39003/01-8194	C1,C22	Est. Rel., 0.1uF, 50V		100000	125	50	30
M39003/01-8053	C3, C20	Est. Rel., 22uF, 15V		22.0E+6	125	15	S
M39003/01-8111	C5, C7	Est. Rel., 22uF, 35V		22.0E+6	125	35	S
M123A01BXB103KC	C21	0.01uF, 50V		10000	85	50	S
M23269/03-7067	C24	4700pF, 100V		4700	85	100	S
M83421/01-2047S	C26-C29, C31	3300pF, 50V		3300	85	50	S
M87217/01-1111A	C12, C15, C19	0.02uF, 30V		20000	85	30	S
M87217/01-1087A	6	0.01uF, 30V		10000	85	30	S
Connector, PCB							
Part Number	Ref/Qty	Description		Pin Pins	Avg. Gauge	Temp. Rise	Male / Unmale per 1000 hours
1337748-1	P1	Receptacle, 92-Contact		80	0.1	0.03	Mil 0.5
Interconnection Assemblies with Plated Through Holes							
Part Number	Ref/Qty	Description		Layers	Quality	PTHs->	Wave Solder Hand Solder per 1000 hours
1337738	B1	Printed Wiring Board		6	Mil	635	0

TABLE A2ES-EOS-20

SIG_PROC.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>III</u>	<u>II</u>	<u>C1</u>	<u>C2</u>
<u>Part Number</u>	<u>Ref/Qty</u>				<u>IE</u>	<u>IQ</u>	<u>IL</u>	
AS83332/30203SCX	U1		Quadruple NAND Buffer	0.00073	0.1988	0.5	0.25	0.0025
AS8332/30502SCX	U3		Quadruple 2-Input XOR Gate	0.00073	0.1988	0.5	0.25	0.0025
AS8332/30701SEX	U4		3-to-8 Line Decoder	0.00082	0.1988	0.5	0.25	0.0025
AS8332/31004SCX	U5, U6		Quadruple 2-Input AND Gate	0.00146	0.1988	0.5	0.25	0.0025
AS8332/30001SCX	U7		Quadruple 2-Input NAND Gate	0.00073	0.1988	0.5	0.25	0.0025
AS8332/12302SEX	U8, U9		Quadruple CMOS Switch	0.00269	0.2577	0.5	0.25	0.0025
AS8332/10101SGX	AR1		Operational Amplifier	0.00087	0.2502	0.5	0.25	0.0025
AS8332/10101SGX	AR2-AR4		Operational Amplifier	0.00261	0.2502	0.5	0.25	0.0025
Diodes, Low Frequency		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>III</u>	<u>IS</u>	<u>IC</u>
<u>Part Number</u>	<u>Ref/Qty</u>				<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>IE</u>
AS8301-1N41481S	CR1, CR5, CR9		Switching Diode	1.59E-05	0.001	1.405	0.054	0.7
AS8301-1N41481S	CR2, CR6, CR10		Switching Diode	1.59E-05	0.001	1.4004	0.054	0.7
AS8301-1N41481S	CR3, CR7, CR11		Switching Diode	1.59E-05	0.001	1.4013	0.054	0.7
AS8301-1N41481S	CR21, CR26, CR16		Switching Diode	1.59E-05	0.001	1.4027	0.054	0.7
AS8301-1N41481S	CR14, CR19, CR24		Switching Diode	1.59E-05	0.001	1.405	0.054	0.7
AS8301-1N41481S	CR15, CR20, CR25		Switching Diode	1.59E-05	0.001	1.4009	0.054	0.7
AS8301-1N5417-S	CR4, CR8, CR12		Fast Switching Rectifier	2.80E-06	0.001	1.4005	0.0953	0.7
AS8301-1N5417-S	CR17, CR22, CR27		Fast Switching Rectifier	2.80E-06	0.001	1.4005	0.0953	0.7
AS8301-751A1S	VR1, VR2		Zener Diode, Vz = 5.1	0.00596	0.002	1.2427	1	0.7
AS8301-1N5651AS	CR13		Transient Absorption Zener	0.00245	0.0013	1.5726	1	0.5
Transistors, Low Frequency, Bipolar		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>Ab</u>	<u>III</u>	<u>IA</u>	<u>IR</u>
<u>Part Number</u>	<u>Ref/Qty</u>				<u>IE</u>	<u>IQ</u>	<u>IL</u>	<u>IE</u>
AS8302-2N2222A	Q1, Q4, Q7		NPN General Purpose	1.74E-05	0.0007	1.2614	0.7	0.7125
AS8302-2N2907A	Q2, Q5, Q8		PNP General Purpose	1.62E-05	0.0007	1.2696	0.7	0.656
AS8302-2N6193S	Q3, Q6, Q9		Power PNP (2N6193)	0.00016	0.0007	1.2629	0.7	1
AS8302-2N2222A	Q10, Q12, Q14		NPN General Purpose	1.75E-05	0.0007	1.2689	0.7	0.3205
AS8302-2N6193S	Q11, Q13, Q15		Power PNP (2N6193)	0.00016	0.0007	1.2629	0.7	1

TABLE A2ES-EOS-20 (Cont.)

Resistors, Fixed, Film		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_R</u>	<u>Π_Q</u>	<u>Π_E</u>
Part Number		R1,R7,R13	Est. Rel., 3.32K, 0.125W	1.20E-05	0.0007	1	0.03	0.2
RLR05C3321FS		R19-R21	Est. Rel., 3.32K, 0.125W	1.18E-05	0.0007	1	0.03	0.2
RLR05C3321FS		6	Est. Rel., 3.32K, 0.125W	2.40E-05	0.0007	1	0.03	0.2
RLR05C3321FS		R3,R9,R15	Est. Rel., 4.75K, 0.25W	1.69E-05	0.0009	1	0.03	0.2
RLR05C3321FS		R30,R38,R47	Est.. Rel., 20K, 0.125W	1.17E-05	0.0006	1	0.03	0.2
RLR05C2002FS		R27,R35,R44	Est.. Rel., 20K, 0.125W	1.17E-05	0.0006	1	0.03	0.2
RLR05C1001FS		R29,R37,R46	Est.. Rel., 20K, 0.125W	1.17E-05	0.0006	1	0.03	0.2
RLR05C1001FS		R26,R34,R43	Est.. Rel., 20K, 0.125W	1.17E-05	0.0006	1	0.03	0.2
RLR05C1002FS		R28,R36,R45	Est. Rel., 51.1 ohms, 0.25W	2.41E-05	0.0013	1	0.03	0.2
RLR07C51R1FS		R39,R48	Est. Rel., 1.1K, 0.5W	4.43E-05	0.0037	1	0.03	0.2
RLR20C1101FS		6	Resistor Kit	2.35E-05	0.0007	1	0.03	0.2
1331072-2		6	Resistor Kit	4.06E-05	0.0011	1	0.03	0.2
1331073-99								
Resistors, Fixed, Wirewound, Power		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_R</u>	<u>Π_Q</u>	<u>Π_E</u>
Part Number		R6, R12, R18	Kit, Est. Rel., 10 to 44.2, 1W	0.000012	0.0046	1	0.03	0.3
1331074-1 (A1)		R6, R12, R18	Kit, Est. Rel., 1 to 2 ohms, 1	0.000022	0.0082	1	0.03	0.3
1331073-14 (A2)		R5, R11, R17	Est. Rel., 1.50 ohms, 2W	0.000016	0.0058	1	0.03	0.3
RWR80S1R50FS		R49, R50	Est. Rel., 1.50 ohms, 2W	0.000011	0.0058	1	0.03	0.3
RWR80S1R50FS								
Capacitors, Fixed, Ceramic, General Purpose		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_CV</u>	<u>Π_Q</u>	<u>Π_E</u>
Part Number		C2	Est. Rel., 0.1uF, 100V	1.12E-05	0.0006	1.4547	0.03	0.4
M39014/02-1350		C4,C10	Est. Rel., 0.1uF, 100V	2.24E-05	0.0006	1.4547	0.03	0.4
M39014/02-1350		C6	Est. Rel., 0.1uF, 100V	1.26E-05	0.0007	1.4547	0.03	0.4
M39014/02-1350								
Capacitors, Fixed, Electrolytic, Tantalum, Solid		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_CV</u>	<u>Π_Q</u>	<u>Π_E</u>
Part Number		C1	Est. Rel., 22uF, 15V	4.34E-05	0.0076	1.4491	0.33	0.4
M39003/01-8053		C7,C8	Est. Rel., 22uF, 15V	0.000037	0.0079	1.4491	1.33	0.03
M39003/01-8053		C3,C9	Est. Rel., 22uF, 35V	0.000086	0.0106	1.4491	2.33	0.03
M39003/01-8111		C6	Est. Rel., 10uF, 75V	0.000049	0.0094	1.3183	3.33	0.4
M39003/01-8297								
Connector, PCB		<u>Ref/Qty</u>	<u>Description</u>	<u>Failure Rate</u>	<u>λ_b</u>	<u>Π_K</u>	<u>Π_P</u>	<u>Π_E</u>
1337748-1	P1		Receptacle, 92-Contact	0.00469	0.0003	1.5	21.941	0.5

TABLE A2ES-EOS-20 (Cont.)

SIG PROC.XLS
03/13/1996

Interconnection Assemblies with Plated Through Holes							
Part Number	Ref/Qty	Description		Failure Rate	λ_b	λ_c	λ_Q
1337289	1	Printed Wiring Board		0.00636	1.7E-05	1.5567	1
Connections Hand Solder, w/Wrapping	Ref/Qty 48	Description Select-At-Test Resistors		Failure Rate 0.00336	λ_b 0.0001	λ_c 1	λ_Q 0.5

-1 Failure Rate: 0.03637
-2 Failure Rate: 0.03647

TABLE A2ES-EOS-20 (Cont.)

SIG_PROC.xls
03/13/1996

Microcircuits, Gate/Logic Arrays and Microprocessors									
Part Number	Ref/Qty	Description	Comp.	Tech.	Junct.	θic	Mfr	Package	Quality
AS83332/30203SCX	U1	Quadruple NAND Buffer	4	Digital	0.5	35.90	0.018	DIP	S
AS8332/30502SCX	U3	Quadruple 2-Input XOR Gate	4	Digital	0.5	35.90	0.018	DIP	S
AS8332/30701SEX	U4	3-to-8 Line Decoder	16	Digital	0.5	35.90	0.018	DIP	S
AS8332/31004SCX	U5..U6	Quadruple 2-Input AND Gate	4	Digital	0.5	35.90	0.018	DIP	S
AS8332/30001SCX	U7	Quadruple 2-Input NAND Gate	4	Digital	0.5	35.90	0.018	DIP	S
AS8332/12302SEX	U8..U9	Quadruple CMOS Switch	41	Linear	0.65	36.58	0.045	DIP	S
AS8332/10101SGX	AR1	Operational Amplifier	23	Linear	0.65	36.20	0.015	Can	S
AS8332/10101SGX	AR2..AR4	Operational Amplifier	23	Linear	0.65	36.20	0.015	Can	S
Diodes, Low Frequency									
Part Number	Ref/Qty	Description	Contact	Type/App	Rated	Applied	Junct.	Actual	θjc
AS8301-1N41481S	CR1..CR5,CR9	Switching Diode	Metal	Switch	75	75	20	Watts	1°C/W
AS8301-1N41481S	CR2..CR6,CR10	Switching Diode	Metal	Switch	75	75	20	Temp.	10
AS8301-1N41481S	CR3..CR7,CR11	Switching Diode	Metal	Switch	75	75	20	Voltage	35.10
AS8301-1N41481S	CR21..CR26,CR1..6	Switching Diode	Metal	Switch	75	75	20	Watts	0.01
AS8301-1N41481S	CR14..CR19,CR24	Switching Diode	Metal	Switch	75	75	20	Temp.	35.00
AS8301-1N41481S	CR15..CR20,CR25	Switching Diode	Metal	Switch	75	75	20	Voltage	0.0E-6
AS8301-1N5417-S	CR4..CR8,CR1..2	Fast Switching Rectifier	Metal	Switch	100	38	38	Watts	0.002
AS8301-1N5417-S	CR17..CR22,CR27	Fast Switching Rectifier	Metal	Switch	100	38	38	Temp.	0.005
AS8301-751A1S	VR1..VR2	Zener Diode, Vz = 5.1	Metal	V. Ref.	n/a	n/a	35.37	Watts	0.001
AS8301-1N5651AS	CR13	Transient Absorption Zener	Metal	T. Sup.	n/a	n/a	38.60	Temp.	0.0373
Transistors, Low Frequency, Bipolar									
Part Number	Ref/Qty	Description	Case	θic	Junct.	Rated	Actual	VCE	Appl.
AS8302-2N2222A	Q1..Q4,Q7	NPN General Purpose	TO-18	70	35.08	0.4	0.0012	15	Sw
AS8302-2N2907A	Q2..Q5,Q8	PNP General Purpose	TO-18	70	35.38	0.32	0.0054	15	JANTXV
AS8302-2N6193S	Q3..Q6,Q9	Power PNP (2N6193)	TO-5	70	35.14	1	0.002	60	JAN
AS8302-2N2222A	Q10..Q12,Q14	NPN General Purpose	TO-18	70	35.35	0.4	0.005	15	JANTXV
AS8302-2N6193S	Q11..Q13,Q15	Power PNP (2N6193)	TO-5	70	35.14	1	0.002	60	JAN

TABLE A2ES-EOS-20 (Cont.)

Resistors, Fixed, Film		Ref/Qty		Description		Rated Power		Actual Power	
Part Number		Ref/Qty		Ref/Qty	Description	Ohms	W	Ohms	W
RLR05C3321FS		R1-R7,R13		Est. Rel., 3.32K, 0.125W	3320	0.125	0.0035	S	
RLR05C3321FS		R6,R21		Est. Rel., 3.32K, 0.125W	3320	0.125	0.00185	S	
RLR05C3321FS	6			Est. Rel., 3.32K, 0.125W	3320	0.125	0.0035	S	
RLR0-4751FS		R3,R9,R15		Est. Rel., 4.75K, 0.25W	4750	0.25	0.0836	S	
RLR05C2002FS		R30,R38,R47		Est.. Rel., 20K, 0.125W	20000	0.125	0.00013	S	
RLR05C1001FS		R7,R35,R44		Est.. Rel., 20K, 0.125W	1000	0.125	0.00013	S	
RLR05C1001FS		R29,R37,R46		Est.. Rel., 20K, 0.125W	1000	0.125	0.000007	S	
RLR05C1002FS		R26,R34,R43		Est.. Rel., 20K, 0.125W	10000	0.125	1E-06	S	
RLR07C51R1FS		R28,R36,R45		Est. Rel., 51.1 ohms, 0.25W	51.1	0.125	0.082	S	
RLR20C1101FS		R39,R48		Est. Rel., 1.1K, 0.5W	1100	0.125	0.196	S	
1331072-2	6			Resistor Kit		0.125	0.001	S	
1331073-99	6			Resistor Kit		0.125	0.0625	S	
Resistors, Fixed, Wirewound, Power		Ref/Qty		Description		Rated Power		Actual Power	
Part Number		Ref/Qty		Ref/Qty	Description	Ohms	W	Ohms	W
1331074-1 (A1)		R6,R12,R18		Kit, Est. Rel., 10 to 44.2, 1W	27.1	1	0.041	S	
1331073-14 (A2)		R6,R12,R18		Kit, Est. Rel., 1 to 2 ohms, 1	1.5	1	0.306	S	
RWR80S1R50FS		R5,R11,R17		Est. Rel., 1.50 ohms, 2W	1.5	2	0.306	S	
RWR80S1R50FS		R49,R50		Est. Rel., 1.50 ohms, 2W	1.5	2	0.306	S	
Capacitors, Fixed, Ceramic, General Purpose		Ref/Qty		Description		Rated		Actual	
Part Number		Ref/Qty		Ref/Qty	Description	pF	Voltage	Voltage	Voltage
M39014/02-1350	C2			Est. Rel., 0.1uF, 100V	100000	125	200	5.1	S
M39014/02-1350	C4,C10			Est. Rel., 0.1uF, 100V	100000	125	200	5.1	S
M39014/02-1350	C6			Est. Rel., 0.1uF, 100V	100000	125	200	30	S
Capacitors, Fixed, Electrolytic, Tantalum, Solid		Ref/Qty		Description		Rated		Actual	
Part Number		Ref/Qty		Ref/Qty	Description	uF	Voltage	Voltage	Voltage
M39003/01-8053	C1			Est. Rel., 22uF, 15V	22	85	15	5.1	S
M39003/01-8053	C7,C8			Est. Rel., 22uF, 15V	22	85	15	5.3	S
M39003/01-8111	C3,C9			Est. Rel., 22uF, 35V	22	85	35	15.1	S
M39003/01-8297	C6			Est. Rel., 10uF, 75V	10	85	75	30	S
Connector, PCB		Ref/Qty		Description		Active	Avg	Temp	Mate / Unmate
1333748-1	P1			Receptacle, 92-Contact		Pin PIns	Gauge	Rise Current	per 1000 hours
						92	26	0.1	0.03
								0.03	0.5

SIG_PROC.xls
03/13/1996

TABLE A2ES-EOS-20 (Cont.)

Interconnection Assemblies with Plated Through Holes					
Part Number	Ref/Qty	Description	Layers	Quality	Wave Solder Hand Solder
1337289	1	Printed Wiring Board	4	Mil	PTHs-> 481 0

TABLE A2ES-EOS-21

Part Number 1356431-1 and -2

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Active Pins
1	1		AS8096-25PLR0	Connector, 25 Pin, LF Filter	J1	25
2	1		311P409-4S-B-12	Connector, Sub-D	P701	28
3	1		AS8096-9SLR0	Connector, 9 Pin, LF Filter	P901	5

Designation λ_p	λ_b	πK	πP	πE	πQ	i_{AVG}	ΔT	Pin AWG
J1 Connector	0.00068	0.00057	1.0	4.78	0.50	0.1	0.01397	22
Connections	0.0325	0.0026			0.50			<i>Hand solder w/o Wrapping</i>
Shields	0.00007	0.00014			0.50	1.0		<i>Hand solder w/ Wrapping</i>
P701 Connector	0.00075	0.00057	1.0	5.26	0.50	0.1	0.01397	22
Connections	0.00364	0.00026			0.50	1.0		<i>Hand solder w/o Wrapping</i>
P901 Connector	0.00027	0.00057	1.0	1.87	0.50	0.1	0.01397	22
Connections	<u>0.0065</u>	<u>0.0026</u>			0.50	1.0		<i>Hand solder w/o Wrapping</i>
		0.04440						

TABLE A2ES-EOS-22

Part Number 1356817-1						Active		
Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Pins		
1	1		311P409-1P-B-12	Connector, Sub-D	P901	5		
2	1		311P409-1S-B-12	Connector, Sub-D	P801	5		
Designation λP			λb	πK	πP	πE	πQ	i_{AVG}
P901 Connector	0.00027		0.00057	1.0	1.87	0.50	0.1	0.01397
Connections	0.00065		0.00026			0.50	1.0	22
P801 Connector	0.00027		0.00057	1.0	1.87	0.50	0.1	0.01397
Connections	0.00065		0.00026			0.50	1.0	22
Shield Connections	<u>0.00021</u>		0.00007			0.50		

A2W6 Cable Assembly

TABLE A2ES-EOS-23

Part Number 1356818-1

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Active Pins
1	1		311P409-2P-B-12	Connector, Sub-D	P902	23
2	1		311P409-2S-B-12	Connector, Sub-D	P802	22

Designation λp	λb	πK	πP	πE	πQ	i_{AVG}	ΔT	Pin AWG	AWG
P902 Connector 0.00063	0.00057	1.0	4.46	0.50	0.50	0.1	0.01397	22	
Connections 0.00299	0.00026			0.50		1.0			Cimp
P802 Connector 0.00061	0.00057	1.0	4.31	0.50	0.50	0.1	0.01397	22	
Connections <u>0.00286</u>	0.00026			0.50		1.0			Cimp
	0.00710								

TABLE A2ES-EOS-24

Part Number 1356819-1

Item No.	Qty	Reqd	Part Number	Nomenclature	Designation	Pins	Active
1	1	1	311P409-2S-B-12	Connector, Sub-D	P903	12	
2	1	1	311P409-2P-B-12	Connector, Sub-D	P803	14	
Designation λp							
P902 Connector	0.00041	0.000057	πK	πP	πE	i_{AVG}	Pin
Connections	0.00156	0.000026	1.0	2.86	0.50	0.1	AWG 22
P802 Connector	0.00045	0.000057	1.0	3.14	0.50	0.1	Hand Solder, w/Wrapping
Connections	<u>0.00182</u>	<u>0.000026</u>			0.50	1.0	
	<u>0.00241</u>						

TITLE Meteorological Satellite (METSAT) and Earth Observing System (EOS) Advanced Microwave Sounding Unit A (AMSU-A) Reliability Prediction Report				DOCUMENT NUMBER
INPUT FROM:		DATE	CDRL:	SPECIFICATION ENGINEER: DATE
			110	R. Regehr 14 Mar 96
CHECKED BY:		DATE	JOB NUMBER:	DATE
APPROVAL SIGNATURES				DEPT. NO.
Technical Director/DPM (R. Hauerwaas) <u>RW Hauerwaas</u>				4001 3/15/96
Performance Assurance (R. Taylor) <u>Rm Taylor</u>				5331 3-15-96
Configuration Management (J. Cavanaugh) <u>J. Cavanaugh</u>				8611 3-15-96
By my signature, I certify the above document has been reviewed by me and concurs with the technical requirements related to my area of responsibility.				
RELEASE (Data Center) <u>FINAL</u>				
Please return this sheet and the reproducible master to the Data Center (119/8651), ext. 2231.				